

FEATURES AND SPECIFICATIONS

Features and Benefits

Molex Premise Networks PowerCat 6 Patch Panels are designed to provide a simple, orderly and efficient means for cross connecting between vertical and horizontal cabling. Fully assembled 24 port (1U) and 48 port (2U), PowerCat 6 Patch Panels are supplied with a rear cable management tray for cable strain relief and neat cable dressing. The front and rear of the panels are marked with the port numbers and individual ports may be colour coded for site-specific network administration by fitting connector icon labels. A protected labelling feature is also provided for clear panel identification.

PowerCat 6 Patch Panels feature the DataGate Plus™ Category 6 connector. This superior RJ45 IDC includes a unique integral shutter that not only protects the connector from dust and contaminants, but the ingenious spring-loaded design also ejects improperly seated patch cords. The DataGate Plus connector is dual colour coded for either 568A or 568B wiring schedules and is RJ11 compatible.

Suitable for high-speed data transmission, the DataGate Plus Category 6 connector has been designed to exceed the highest electrical performance standards in the industry and has been independently tested and verified by ETL SEMKO for Category 6 component compliance. The DataGate Plus connector is also backwards compatible with CSE systems.

- 24 Ports 1U & 48 Ports 2U
- Rear cable management included
- Colour coded port option
- DataGate Plus component compliant connector
- 568A/B wiring schedule
- Independently tested

Compliant With

TIA/EIA-568-B.2-1, FCC Subpart F 68.5, ISO 60603-7, ISO 11801:2002, EN50173:2002

Approvals

UL-1863 (Pending)
CSA (Pending)
ETL Verified for Category 6 Component Compliance

IDC Connector

Plastic Housing: Polycarbonate, UL94V-0 rated or equivalent
Operating Life: Minimum 20 reterminations
Contact Material: Copper Alloy
IDC Contact Plating: Tin/Lead Plate
Contact Force: 100g minimum
Wire Accommodation: 22-24 AWG solid

Patch Panel Characteristics

Material: CRS (cold rolled steel)
Thickness: .060" (1.52mm)
Coating: Graphite Grey Powdercoat

Mechanical Characteristics

Jack Connector

Plastic Housing: Polycarbonate, UL94V-0 rated or equivalent
Operating Life: Minimum 750 insertion cycles
Contact Material: Copper Alloy
Contact Plating: 1.25 micrometres Au/Ni
Contact Force: 100g minimum
Plug Retention Force: 6.8kg


Electrical Characteristics

Interface Resistance: 20mΩ
Initial Contact Resistance: 2.5mΩ
Insulation Resistance: >100 MΩ


Termination Tool: 110



PowerCat 6 Patch Panel

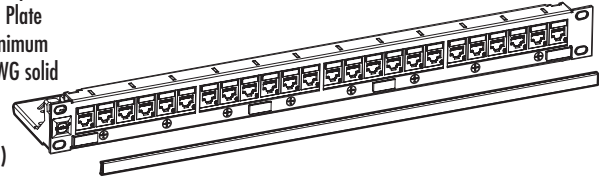

1U 24 Port PowerCat 6 Patch Panel
Dimensions: 44mm x 483mm x 98mm
Shipping Weight: 530g

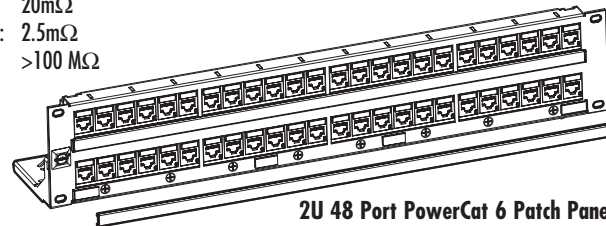

2U 48 Port PowerCat 6 Patch Panel
Dimensions: 88mm x 483mm x 98mm
Shipping Weight: 1.00kg

ORDERING INFORMATION

Order No.	Description
PID-00141-EU	1U 24 Port PowerCat 6 Patch Panel 568A/B with Cable Management
PID-00142-EU	2U 48 Port PowerCat 6 Patch Panel 568A/B with Cable Management
Accessories	
CSP-00021-**	Connector Icon Label



Insert color code in place of ** in part number when ordering PowerCat 6 Accessories:

01 = Almond, 02 = White, 04 = Black, 05 = Ivory, 08 = Light Grey, RD = Red, BL = Blue, GR = Green, YL = Yellow, RG = Orange, PP = Purple




MOLEX PREMISE NETWORKS

Molex Premise Networks
Corporate Headquarters
Tel: 1 603 324 0200
www.molexpn.com

European Headquarters
Tel: 44 (0) 1489 527111
www.molexpn.co.uk

Pac Rim Headquarters
Tel: 61 3 9971 7111
www.molexpn.com.au

Molex Incorporated
Tel: 630 969 4550
www.molexpn.com.au

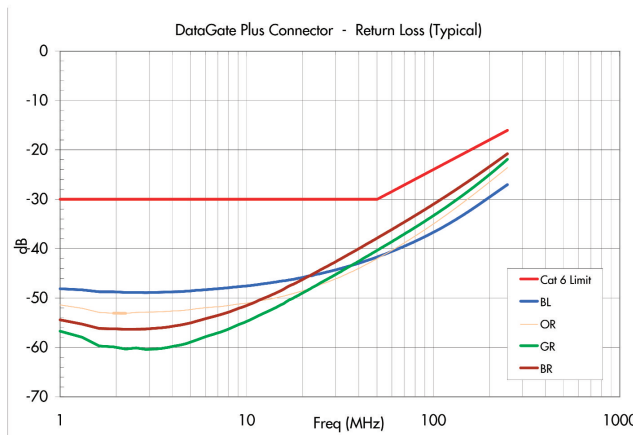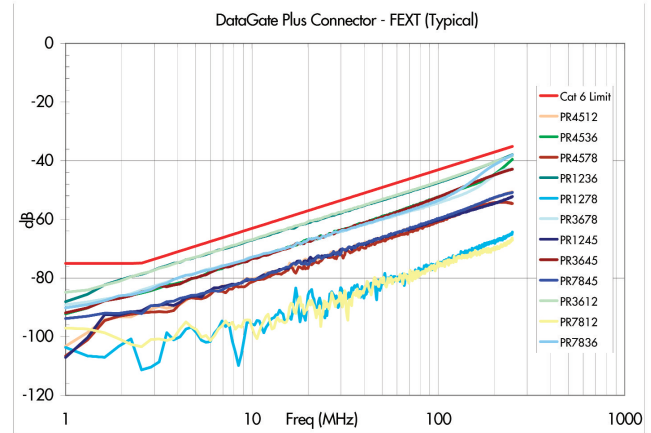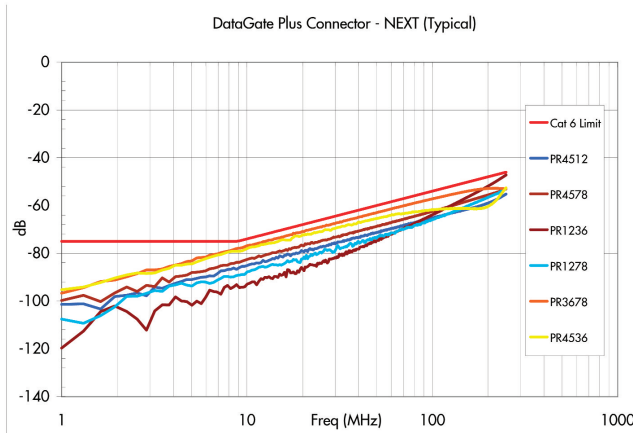

DataGate Plus Worst Case (dB)								
Frequency (MHz)	NEXT		FEXT		Return Loss		Insertion Loss	
	SPEC	MOLEX	SPEC	MOLEX	SPEC	MOLEX	SPEC	MOLEX
1	-75.0	-95.3	-75.0	-84.9	-30.0	-48.1	-0.10	-0.02
4	-75.0	-85.3	-71.1	-75.0	-30.0	-48.8	-0.10	-0.02
8	-75.0	-79.1	-65.0	-68.9	-30.0	-47.9	-0.10	-0.02
10	-56.1	-77.2	-63.1	-67.1	-30.0	-46.7	-0.10	-0.02
16	-69.9	-73.0	-59.0	-62.9	-30.0	-43.1	-0.10	-0.02
20	-68.0	-70.8	-57.1	-60.8	-30.0	-41.3	-0.10	-0.02
25	-66.0	-68.9	-55.1	-59.1	-30.0	-39.3	-0.10	-0.02
31.25	-64.1	-67.2	-53.2	-57.2	-30.0	-37.4	-0.11	-0.02
62.5	-58.1	-61.1	-47.2	-51.4	-28.0	-31.2	-0.16	-0.03
100	-54.0	-57.3	-43.1	-47.2	-24.0	-26.9	-0.20	-0.05
200	-48.0	-50.7	-37.1	-40.5	-18.0	-20.2	-0.28	-0.07
250	-46.0	-48.7	-35.1	-38.0	-16.0	-18.2	-0.32	-0.09

NOTE:
 Performance values shown in dB.
 For NEXT, FEXT and Return Loss: the higher the negative value the better the performance (e.g. -73.0 better than -69.9)
 For Insertion Loss: the lower the negative value the better the performance (e.g. -0.02 better than -0.10)

MOLEX PREMISE NETWORKS

Molex Premise Networks
 Corporate Headquarters
 Tel: 1 603 324 0200
 www.molexpn.com

European Headquarters
 Tel: 44 (0) 1489 527111
 www.molexpn.co.uk

Pac Rim Headquarters
 Tel: 61 3 9971 7111
 www.molexpn.com.au

Molex Incorporated
 Tel: 630 969 4550
 www.molexpn.com.au