372-0809

CHARACTERISTICS	
Contact resistance	15mΩ max. (initial)
Insulation resistance	100MΩ min. (at 500 VDC)
Dielectric strength	1,000 VAC,50/60Hz for 1 minute between
Mechanically service life	1,000,000 operations min.
Electrically service life	100,000 operations min.

Rating	15A 125VAC or 250VAC
Terminal	
Item No.	Z15G1704
OF max.	160g
RF min.	42g
PT max.	2.7mm
OT min.	2.4mm
MD max.	0.5mm
FP max.	32.5mm
OP	30.2± 0.4mm

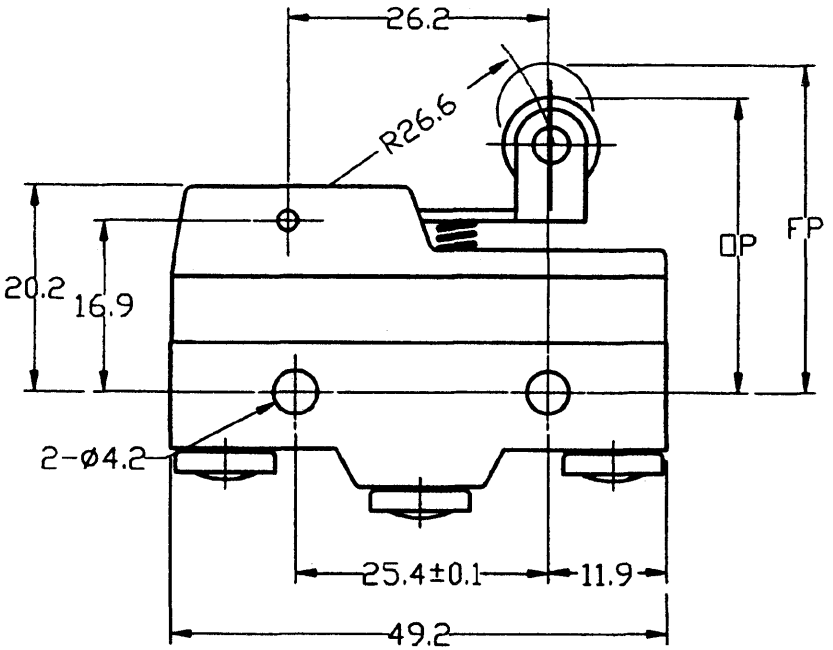

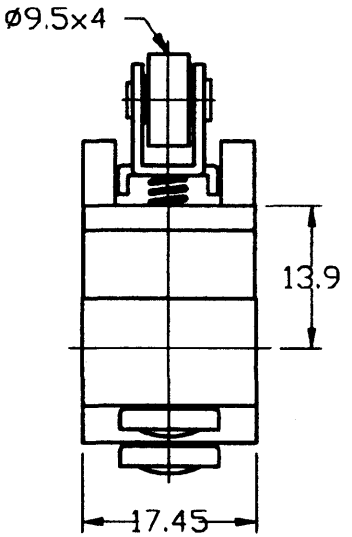

Solder terminal

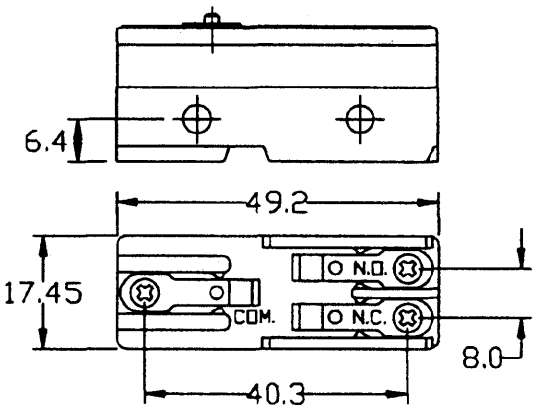

Screw terminal (-B)

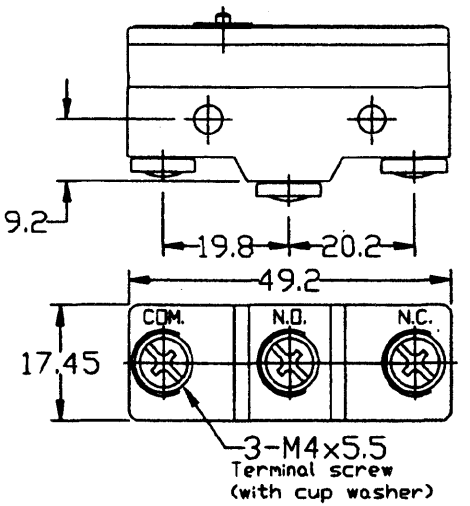

版本A

海立電氣有限公司 HIGHLY ELECTRIC CO LTD	修正REVISION	日期DATE	說明DESCRIPTION	審核CHECKED 陳對克威 9/27	單位UNIT m/m	材質MATERIAL	日期DATE 83.09.27	料號 TYPE NO	Z15G1704
				繪圖DRAWN LKW	比例SCALE 1.5=1	公差TOLERANLE ±0.15	加工PROCESS	檔名 FILE NO	01113030