




# 6030, ML8

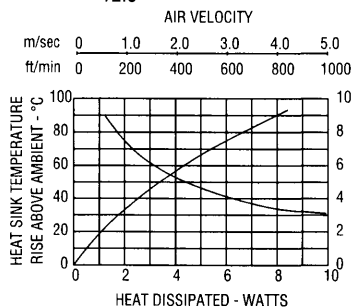

Model	Material	$R_{\theta}$ (°C/W)	Model	Material	$R_{\theta}$ (°C/W)
6030B	Al	12.5	6030B-TT	Cu	12.5
6030PB	Al	12.5	6030D	Cu	12.5
ML8*	Al	12.5			

\* Fins on the ML8 are the twisted vane configuration.




# 6021, 6221





Model	Dim. A mm (inches)	Dim. B mm (inches)	Dim. C mm (inches)	$R_{\theta}$ (°C/W)
6021PB	2.21±.13 (.087±.005)	10.16 (.400)	1.78 (.070)	12.5
6221PB	3.18±.13 (.125±.005)	6.99 (.275)	2.54 (.100)	12.5

U.S. Patent No. D.260,388



▲ 6021PB

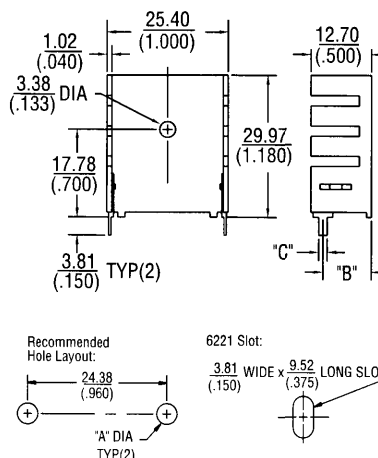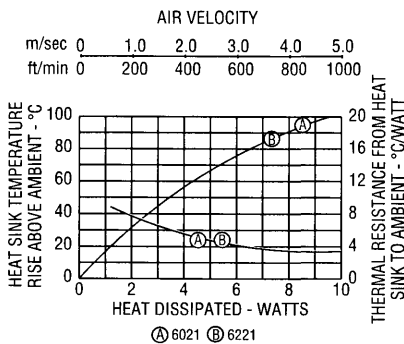

▲ Hole pattern shown for 6021 only. See Figure 1 for slot detail used on 6221 only.

▲ FIGURE 1

# TV65, TV71



TV65



TV71



Model	$R_{\theta}$ (°C/W)
TV65	13.5
TV71	13.5



▲ TV65



▲ TV71

