


IF IN DOUBT ASK

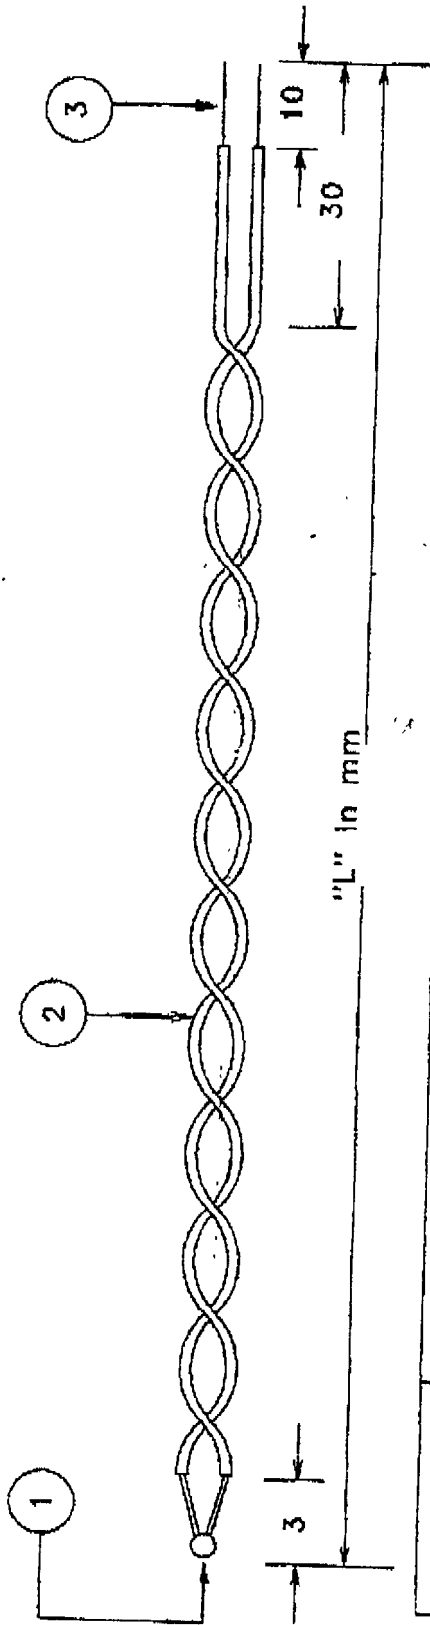

"L" in mm

Farnell No.	Supplier Part No.	T/C Type	Colour Code	L in mm
707-6150	Z2-K-1m(IEC)	K	+ve Green / -ve White	1000
707-6126	Z2-K-2m(IEC)	K	+ve Green / -ve White	2000
707-6174	Z2-T-1m(IEC)	T	+ve Brown / -ve White	1000
707-6186	Z2-T-2m(IEC)	T	+ve Brown / -ve White	2000
541-023	Z2-K-1m	K	+ve Brown / -ve Blue	1000
146-879	Z2-K-2m	K	+ve Brown / -ve Blue	2000
541-035	Z2-T-1m	T	+ve White / -ve Blue	1000

\*

ITEM	DESCRIPTION	DRAWN	DATE	CHECKED
1	EXPOSED JUNCTION, WIRED HEAD.			
2	PIRE INSULATOR THIN TWISTED PAIR T/C WIRE			
3	1/0-2000B-REGULATION TEMP RAINING -75 TO 250 °C			
	Bare wire tails			

ISSUE	MODIFICATION	APP'D	DATE	UNLESS OTHERWISE STATED DIMENSIONS ARE IN mm.	MAT'L	FINISH
B	Black heat shrink removed from tails.	GW	01/98	SCALE: X +/- 0.4 XX +/- 0.2 XXX +/- 0.1		
				TOLERANCES: X +/- 0.4 XX +/- 0.2 XXX +/- 0.1		

PTFE Insulated  
Exposed Junction IC  
USED ON: Farnell

LABFACILITY  
TEMPERATURE  
TECHNOLOGY  
89 WALDEGRAVE RD,  
MIDDLESEX,  
TW11 8LR.  
Tel: 0181 843 5331

THIS DRAWING IS THE PROPERTY OF LABFACILITY LTD AND SHALL NOT BE COPIED OR USED, EITHER IN WHOLE OR PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LABFACILITY LTD.

DRAWING NO. 03-411-7C  
ISSUE B

NAH 05/97

GW

ISSUE B

03-411-7C

03-411-7C

03-411-7C

03-411-7C

03-411-7C

03-411-7C

03-411-7C

03-411-7C