


M 8
SI = 0,5...1,5 mm
0...10V
shielded

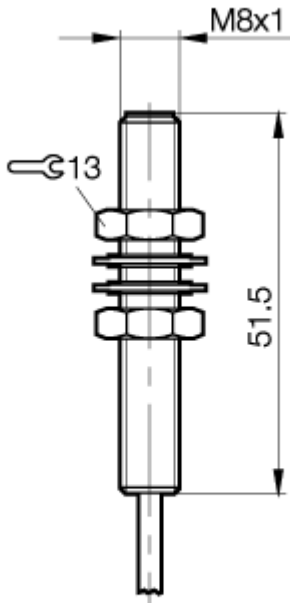

Common Data

Mounting in steel		shielded
Linearity range SI	mm	0,5...1,5
Rated operating distance Se	mm	1
Repeat accuracy		± 8 µm
Linearity		≤ ± 30 µm
Limit frequency (-3dB)		1000 Hz
Measuring velocity		≤ 20 m/s
Response time		0,5 ms
Temperature coefficient TK	typ.	-1 µm/K
In optimized range	min.	-0,5 µm/K
from +10...+50°C	max.	-2 µm/K
Max. non-linearity	%	±3% from Ua max.
Max. working range shift	mm	±0,1
Adjusting indication		nein
Ambient temperature range	°C	-10...+70
IEC-Code		1A08SA1
Time delay before availability	ms	<1ms


Mechanical Data

Housing size	mm	cyl. M 8
Measurements BxHxT or DxT	mm	M8x1 x 51,5
Housing material		stainless steel
Material of sensing face		PBTP
Degree of protection	IP	IP67
Connection		Cable
Cable type		LifYY-O 3x0,14mm ² 3m lang

Electrical Data

Current type		DC
Wiring		3-Wire
Output signal		0...10V
Rated operational voltage	V	24 DC
Rated insulation voltage UI	V	250 V AC
Ripple	%	≤ 15% from Ue
Output resistance		>2kOhm
No-load supply current	mA	≤ 8
Short circuit protection		yes
Protected against polarity rev		yes

PX1330



Approvals



Utilization categories DC 13
Insulation class II

If not differently indicated,
all values by IEC 947-5-2
(DIN EN60947-5-2)
Specifications subject to change

Balluff GmbH
Postfach 1160
73761 Neuhausen
Telefon (07158) 173-0
Telefax (07158) 5010

04.06.2004 / Online-Information