

Solar Isolator Range - Enclosed



Bright **solutions**

Enclosed Solar Isolator for Photovoltaic Applications

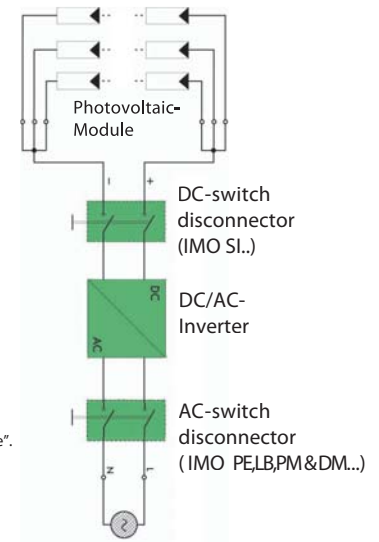
The IMO "SI" Solar Isolator range has been specifically developed as a "True DC" switch rather than a modified AC switch, to disconnect the DC/AC inverter from the photovoltaic panels as illustrated. All photovoltaic installations have to be equipped with DC isolators in accordance with IEC 60364-7-712.

Key Features

- Available in 2 or 4 pole versions;
- Operator independent trigger ratchet switching mechanism for high speed switching (5mS max);
- Knife edge self cleaning contact mechanism;
- Long arc cooling chambers;
- Maximum torque 1Nm for easy operation;



G83/1 Compliant
We recommend installers label equipment
"Danger - Contains live parts during daytime".



Switching configurations

Type	2-pole (SI12 & SI20 also)	2+2-pole 2 poles in series +2 poles parallel	4-pole	4-pole with jumpers Input on top Output bottom	4-pole with jumpers Input and Output bottom	4-pole with jumpers Input and Output on top
SI16	2	2H	4	4S	4T	4B
SI25	2	2H	4	4S	4T	4B
SI32	2	2H	4	4S	4T	4B

Contacts Wiring diagram	Switching example

Technical data for DC, according to IEC 60947-3, VDE0660

			DC21B					DC22B				
			500V	600V	700V	800V	900V	1000V	500V	600V	800V	1000V
SI12 ..		2 poles in series	12A	12A	12A	10A	9A	6A	5A	4A	1A	0.5A
		4 poles in series	12A	12A	12A	12A	12A	12A	12A	12A	8A	6A
SI16 ..		2 poles in series	16A	16A	16A	16A	13A	9A	7A	5.5A	2A	1A
		2 poles in series + 2 parallel	29A	29A	16A	16A	13A	9A	-	-	-	-
		4 poles in series	16A	16A	16A	16A	16A	16A	16A	16A	16A	11.5A
SI20 ..		2 poles in series	20A	20A	20A	18A	14A	10A	7.5A	5.75A	2.25A	1.25A
		4 poles in series	20A	20A	20A	20A	20A	20A	20A	20A	11.75A	8.5A
SI25 ..		2 poles in series	25A	25A	23A	20A	16A	11A	8A	6A	2.5A	1.5A
		2 poles in series + 2 parallel	45A	45A	23A	20A	16A	11A	-	-	-	-
		4 poles in series	25A	25A	25A	25A	25A	25A	25A	25A	25A	12A
SI32 ..		2 poles in series	32A	32A	27A	23A	20A	13A	9A	6.5A	3A	2A
		2 poles in series + 2 parallel	58A	50A	27A	23A	20A	13A	-	-	-	-
		4 poles in series	32A	32A	32A	32A	32A	32A	32A	32A	27.5A	12.5A






DC21B Switching of DC-resistive loads including moderate overloads. Time constant L/R ≤ 1ms

DC22B Switching of DC-resistive and inductive loads including moderate overloads. Time constant L/R ≤ 2,5ms (e. g: shunt-motors)

Rotary Actuator Switch Lockable Off in Plastic Enclosure, IP65, us Typ 1



padlock device 64R








DC21B 600V DC	1000V DC	Poles in series	Number of Strings	Type	Pack pcs	Weight kg/pcs.
12A	6A	2	1	SI12 PE64R 2	1	0,39
16A	9A	2	1	SI16 PE64R 2	1	0,39
20A	10A	2	1	SI20 PE64R 2	1	0,39
25A	11A	2	1	SI25 PE64R 2	1	0,39
32A	13A	2	1	SI32 PE64R 2	1	0,39
29A	9A	2	1	SI16 PE64R 2H	1	0,45
45A	11A	2	1	SI25 PE64R 2H	1	0,45
50A	13A	2	1	SI32 PE64R 2H	1	0,45
12A	6A	2	2	SI12 PE64R 4	1	0,42
16A	9A	2	2	SI16 PE64R 4	1	0,42
20A	10A	2	2	SI20 PE64R 4	1	0,42
25A	11A	2	2	SI25 PE64R 4	1	0,42
32A	13A	2	2	SI32 PE64R 4	1	0,42
16A	16A	4	1	SI16 PE64R 4S	1	0,43
25A	25A	4	1	SI25 PE64R 4S	1	0,43
32A	32A	4	1	SI32 PE64R 4S	1	0,43
16A	16A	4	1	SI16 PE64R 4T	1	0,43
25A	25A	4	1	SI25 PE64R 4T	1	0,43
32A	32A	4	1	SI32 PE64R 4T	1	0,43
16A	16A	4	1	SI16 PE64R 4B	1	0,43
25A	25A	4	1	SI25 PE64R 4B	1	0,43
32A	32A	4	1	SI32 PE64R 4B	1	0,43

Emergency Stop Rotary Actuator Switch Lockable Off in Plastic Enclosure IP65, us Typ 1












padlock device 64R



DC21B 600V DC	1000V DC	Poles in series	Number of Strings	Type	Pack pcs	Weight kg/pcs.
12A	6A	2	1	SI12 ES-PE 2	1	0,39
16A	9A	2	1	SI16 ES-PE 2	1	0,39
20A	10A	2	1	SI20 ES-PE 2	1	0,39
25A	11A	2	1	SI25 ES-PE 2	1	0,39
32A	13A	2	1	SI32 ES-PE 2	1	0,39
29A	9A	2	1	SI16 ES-PE 2H	1	0,45
45A	11A	2	1	SI25 ES-PE 2H	1	0,45
50A	13A	2	1	SI32 ES-PE 2H	1	0,45
12A	6A	2	2	SI12 ES-PE 4	1	0,42
16A	9A	2	2	SI16 ES-PE 4	1	0,42
20A	10A	2	2	SI20 ES-PE 4	1	0,42
25A	11A	2	2	SI25 ES-PE 4	1	0,42
32A	13A	2	2	SI32 ES-PE 4	1	0,42
16A	16A	4	1	SI16 ES-PE 4S	1	0,43
25A	25A	4	1	SI25 ES-PE 4S	1	0,43
32A	32A	4	1	SI32 ES-PE 4S	1	0,43
16A	16A	4	1	SI16 ES-PE 4T	1	0,43
25A	25A	4	1	SI25 ES-PE 4T	1	0,43
32A	32A	4	1	SI32 ES-PE 4T	1	0,43
16A	16A	4	1	SI16 ES-PE 4B	1	0,43
25A	25A	4	1	SI25 ES-PE 4B	1	0,43
32A	32A	4	1	SI32 ES-PE 4B	1	0,43


Technical Data






Data according to IEC 60947-3, VDE 0660

Main contacts	Type	SI12	SI16	SI20	SI25	SI32	
Rated thermal current I_{the}	A	12	16	20	25	32	
Rated insulation voltage $U_i^{(1)}$	V	1000	1000	1000	1000	1000	
Disconnection property performed up to	V	1000V	1000V	1000V	1000V	1000V	
Contact distance (per pole)	mm	8	8	8	8	8	
Rated operational current I_e	500V	A	6	9	10	11	13
DC21B	600V	A	4	6	7	8	10
L/R = 1ms	800V	A	2	3	3,5	4	5
	1000V	A	1	1,5	1,75	2	2,5
2 pole in series	500V	A	12	16	20	25	32
	600V	A	12	16	20	25	32
	700V	A	12	16	20	23	27
	800V	A	10	16	18	20	23
	900V	A	9	13	14	16	20
	1000V	A	6	9	10	11	13
2 poles in series	500V	A	-	29	-	45	58
+ 2 poles parallel	600V	A	-	29	-	45	50
	700V	A	-	16	-	23	27
	800V	A	-	16	-	20	23
	900V	A	-	13	-	16	20
	1000V	A	-	9	-	11	13
3 poles in series	500V	A	12	16	20	25	32
	1000V	A	12	16	20	25	32
4 poles in series	500V	A	12	16	20	25	32
	600V	A	12	16	20	25	32
	700V	A	12	16	20	25	32
	800V	A	12	16	20	25	32
	900V	A	12	16	20	25	32
	1000V	A	12	16	20	25	32
Rated operational current I_e	500V	A	0,75	1	1,15	1,25	1,5
DC22B	600V	A	0,3	0,5	0,6	0,75	1
L/R = 2,5ms	800V	A	0,25	0,3	0,35	0,4	0,5
	1000V	A	0,5	0,15	0,15	0,2	0,25
2 poles in series	500V	A	5	7	7,5	8	9
	600V	A	4	5,5	5,75	6	6,5
	800V	A	1	2	2,25	2,5	3
	1000V	A	0,5	1	1,25	1,5	2
3 poles in series	500V	A	12	16	20	25	27
	600V	A	12	16	20	23	25
	800V	A	5	6,5	6,75	7	7,5
	1000V	A	4,5	5,5	5,75	6	6,5
4 poles in series	500V	A	12	16	20	25	32
	600V	A	12	16	20	25	27,5
	800V	A	8	11,5	11,75	12	12,5
	1000V	A	6	8	8,5	9	10
Rated conditional short-circuit current	kA _{eff}	5	5	5	5	5	
Max. fuse size	gL (gG)	A	32	40	50	63	80
Mechanical life	x10 ³	10		10	10		
Rated short-time withstand current (1s) I_{CW} 2, 4 / 2+2H	A	800 / 1300		900 / 1500	1000 / 1700		
Short circuit making capacity I_{CM} 2, 4 / 2+2H	A	800 / 1300		900 / 1500	1000 / 1700		
Maximum cable cross sections (incl. jumper SIV-B1)							
solid or stranded	mm ²			4 - 16			
flexible	mm ²			4 - 10			
flexible (+ multicore cable end)	mm ²			4 - 10			
Size of terminal screw				M4 Pz2			
Tightening torque	Nm			1,2 - 1,8			
Maximum ambient temperature							
Operation	open	°C		-40 to +65			
	enclosed	°C		-40 to +45			
Storage		°C		-50 to +90			
Power loss per switch at $I_{e,max}$. DC21B							
2	W		2		5	8	
2+2H	W		3,5		8,5	14	
4	W		4		10	16	

1) Suitable at 1000V for: earthed-neutral systems, overvoltage category I to III, pollution degree 3 (standard-industry): $U_{imp} = 8kV$.
Data for other conditions on request.


Technical Data (continued)

Data acc. to UL508 c  File E146487, Category no.: NRNT2, NRNT8

Type				SI12	SI16	SI20	SI25	SI32
Ampere-Rating "General use"								
1 pole	350V	A		3.5	4	4.5	5	6
	500V	A		3.5	4	4.5	5	6
	600V	A		3.5	4	4.5	5	6
2 poles in series	350V	A		12	16	18	20	25
	500V	A		12	16	18	20	25
	600V	A		12	16	18	20	25
2 poles in series + 2 poles parallel	350V	A		24	29	38	45	58
	500V	A		24	29	36	38	40
	600V	A		12	21	22	23	25
3 poles in series	350V	A		-	16	-	25	32
	500V	A		-	16	-	25	32
	600V	A		-	16	-	25	32
4 poles in series	350V	A		12	16	20	25	32
	500V	A		12	16	20	25	32
	600V	A		12	16	20	25	32
Fuse size (RK5)	Industrial Control Switch							
5kA / 600V		A		32	40	50	60	80
Maximum cable cross sections (incl. jumper SIV-B1)								
solid or stranded		AWG				12-10		
flexible		AWG				12-6		
flexible (+ multicore cable end)		AWG				12-6		
Size of terminal screw						M4 Pz2		
Tightening torque		lb.inch				11 - 16		
Rated operational current I _e								
AC21B	A2, A4	U _e max. 440V	A	12	16	20	25	32
	A2+2	U _e max. 440V	A	-	29	-	45	58

Dimensions:

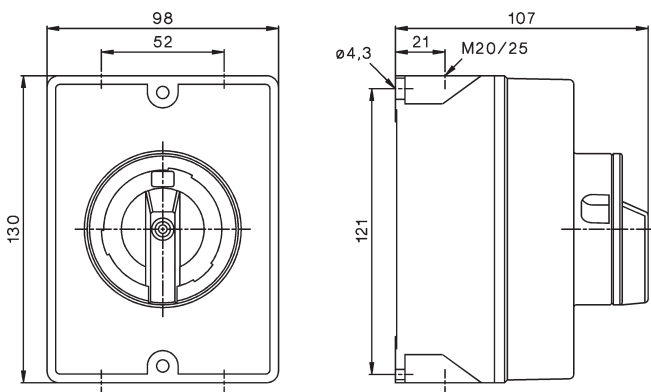SI12PE/ES-PE, SI16 PE/ES-PE, SI20PE/ES-PE SI25 PE/ES-PE, SI32 PE/ES-PE



Enclosed AC Solar Isolator for Photovoltaic Applications



PE69-30...20-40




PE69-30...63-125

Rotary Actuator AC Switch in Plastic Enclosure IP65, us Typ 1

Type		AC21/Amps
PE69-3020		20A
PE69-3025		25A
PE69-3032		32A
PE69-3040		40A
PE69-3063		63A
PE69-3080		80A
PE69-3125		125A

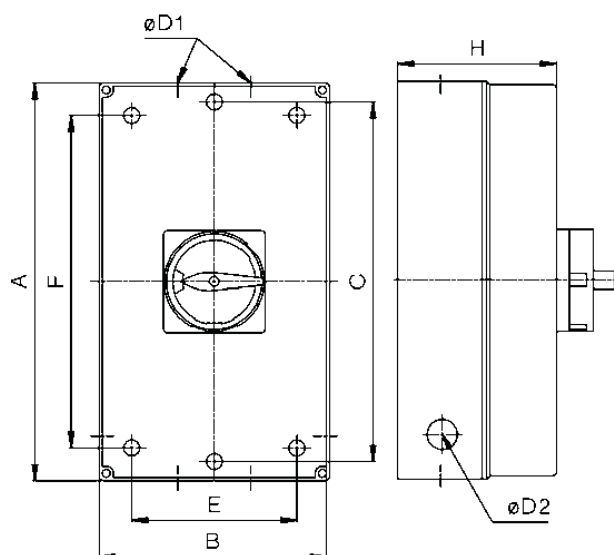Dimensions



Maintenance and Safety Switches PE69(S)..PF..

Type	pole	A	B	C	D1	D2	E	F	H
PE69..20 PFH.. A., PE69..40 PFH.. A	3	130	98	121	2x25,5/20,5	-	75	100	77
PE69..63 PFH.. - PE69..125 PFH.. A.	3	200	120	-	40,5/32,5 +16,5	-	95	165	86
PE69..160 PF..	3	300	200	-	2x50,5	25,5	172	272	172

Technical Data



Data according to IEC 947-3, IEC 947-5-1, VDE 0660, EN 60947-3, EN 60947-5-1

Type		PE69..20	PE69..25	PE69..32	PE69..40	PE69..63	PE69..80	PE69..85	PE69..100	PE69..125
Main contacts										
Rated thermal current I_{th} open	A	20	25	32	40	63	80	85	100	125
Rated thermal current I_{the} enclosed	A	20	25	32	40	63	80	85	100	110
Rated insulation voltage U_i ¹⁾	V	690	690	690	690	690	690	1000 ⁵⁾	1000 ⁵⁾	1000 ⁵⁾
Rated operational current I_e AC21A	A	20	25	32	40	63	80	85	100	125
Making capacity I_{eff} 3x380-440V	A	160	190	220	300	370	440	600	725	850
Breaking capacity 3x220-240V	A	160	180	200	250	330	380	480	580	680
	A	160	180	200	250	330	380	480	580	680
	A	80	110	140	170	190	220	250	330	420
Disconnection property performed up to	V	690	690	690	690	690	690	1000	1000	1000
Motor Switch AC3 3x400V	A	12	16	23	30	37	37	45	60	72
Motor Switch AC3 3x220-240V	kW	3	4	5,5	7,5	11	11	15	18,5	22
Direct switching of single motors 3x380-440V	kW	5,5	7,5	11	15	18,5	18,5	22	30	37
	kW	5,5	7,5	11	15	18,5	18,5	18,5	22	30
Main Switch AC23 3x400V	A	16	20	25	32	45	45	60	72	85
Motor Switch, AC23A, 3x220-240V	kW	4	5,5	7,5	9	15	15	18,5	22	30
Main Switch, AC23B 3x380-440V	kW	7,5	10	12,5	16	22	22	30	37	45
Safety Switch 3x660-690V	kW	5,5	7,5	11	15	18,5	18,5	22	30	37
Rated conditional short-circuit current	kA _{eff}	10	10	10	10	10	10	10	10	10
Max. fuse size gL (gG)	A	25	35	40	50	63	80	100	100	125
Mechanical life	x10 ³	200	200	200	200	100	100	100	100	100
Rated short-time withstand current (1sec. current)	A	250	300	400	500	600	850	1000	1200	1500
Maximum cable cross sections										
solid	mm ²	10	10	10	10	25	25	50	50	50
	AWG	8	8	8	8	4	4	0	0	0
flexible (+ multicore cable end)	mm ²	6	6	6	6	16	16	35	35	35
	AWG	10	10	10	10	6	6	2	2	2
Size of terminal screw		M3,5	M3,5	M3,5	M3,5	M5	M5	M6	M6	M6
Tightening torque	Nm	0,8-1,7	0,8-1,7	0,8-1,7	0,8-1,7	2-4	2-4	3,5-4,5	3,5-4,5	3,5-4,5
	lb.inch	7-15	7-15	7-15	7-15	18-35	18-35	31-40	31-40	31-40
Auxiliary contacts										
Rated insulation voltage U_i ¹⁾	V	690	690	690	690	690	690	690	690	690
Rated thermal current I_{th} , I_{the}	A	10	10	10	10	10	10	10	10	10
Switching capacity AC15 220-240V	A	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5
	A	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5
Rated conditional short-circuit current	kA _{eff}	3	3	3	3	3	3	3	3	3
Max. short circuit protection gL (gG)	A	10	10	10	10	10	10	10	10	10
Maximum cable cross sections										
solid	mm ²	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5
	AWG	12	12	12	12	12	12	12	12	12
flexible (+ multicore cable end)	mm ²	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5	2,5
	AWG	14	14	14	14	14	14	14	14	14

Data according to UL und cUL

Type		PE69..20	PE69..25	PE69..32	PE69..40	PE69..63	PE69..80	PE69..85	PE69..100	PE69..125
Rated voltage	V	600	600	600	600	600	600	600	600	600
Ampere-Rating "General use"	A	20	25	32	40	63	80	85	100	125
DOL-Rating 3-phase 110-120V	HP	1	1,5	2	2	3	5	7,5	10	15
	HP	3	5	5	5	10	10	20	25	30
	HP	7,5	10	10	10	20	20	40	50	60
	HP	10	10	15	15	25	25	50	60	60
DOL-Rating 1-phase 110-120V	HP	1	1	1	1	2	2	3	5	7,5
	HP	1	2	2	2	3	3	7,5	10	10
	HP	2	2	3	3	5	5	10	15	15
Fuse size (RK5) Manual Motor Controller 5kA / 600V	A	40	50	50	70	90	110	200	250	300
	A	40	50	50	50	70	70	-	-	-

1) suitable for: earthed-neutral systems, overvoltage category I to III, pollution degree 3 (standard-industry); U_{imp} = 6kV. Data for other conditions on request

2) the values after the slash are valid for switches 6-pole or more

3) Suitable for no load applications(AC20A) above 690V

4) Fuse RK1 / 10kA / 600V

5) U_{imp} = 8kV

IMO Precision Controls Ltd
1000 North Circular Road
Staples Corner
London NW2 7JP
United Kingdom

Tel: +44 (0)20 8452 6444
Fax: +44 (0)20 8450 2274
Email: imo@imopc.com
Web: www.imopc.com

IMO Automazione
Via Ponte alle Mosse, 61
50144 Firenze (FI)
Italia

Tel: +39 800 783281
Fax: +39 800 783282
Email: info@imopc.it
Web: www.imopc.it

IMO Jeambrun Automation SAS
Centre D'Affaires Rocroy
30, Rue de Rocroy
94100 Saint-Maur-Des-Fosses
France

Tel: +8000 452 6444
Fax: +8000 452 6445
Email: imo@imopc.fr
Web: www.imopc.fr

IMO Canada
Unit 10, 1 Whitmore Road
Woodbridge
Ontario L4L 8G4
Canada

Tel: +1 905 265 9844
Fax: +1 905 265 1749
Email: imocanada@imopc.com
Web: www.imopc.com