


1

2

3

4

5

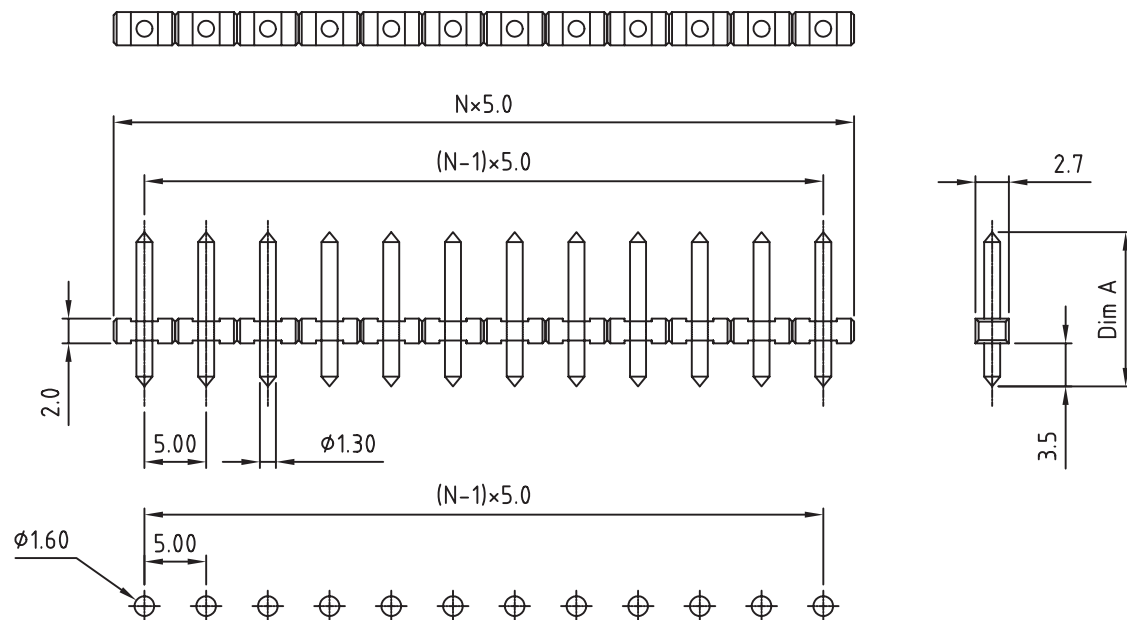

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: NYLON 66
 COLOR: BLACK
 SOLID PIN: BRASS (CuZn)
 SOLDER TAIL PLATING: TIN

ENVIRONMENTAL

OPERATING TEMPERATURE: -30 UP TO 105°C
 FLAMABILITY RATING: UL94-V0
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	UL	VDE
CURRENT RATING:	15A	12A
WORKING VOLTAGE:	300VAC	300VAC
WITHSTANDING VOLTAGE:	1.6KV	2.5KV

MECHANICAL
 PITCH: 5.0MM

SOLDERING: WAVE PROCESS ONLY

PACKAGING
 BOX


SERIE 300

CERTIFICATION



RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = +/- 0.2

.XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/1

DRAW: MARVIN

DESCRIPTION: 5.0MM PIN HEADER

WERI PART NO: 691 300 700 0xx

SIZE

A4

G							
F							
E							
D							
C							
B							
A	31-OCT-07	PDF	EC				
REV	DATE	FILE	BY				