


DRG No. CP38924	ISSUE 1	TYPE No. ELED/T5.5/12/LC5/H/-	DIM. IN: MILLIMETRES	ODC:QS:40077 ISSUE 1 DO NOT SCALE	THIS DRAWING AND THE COPYRIGHT AND DESIGN RIGHT THEREIN ARE THE PROPERTY OF OXLEY DEVELOPMENTS CO. Ltd. AND MUST NOT BE REPRODUCED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.	ISS	MODIFICATION	DATE
--------------------	------------	----------------------------------	-------------------------	---	--	-----	--------------	------

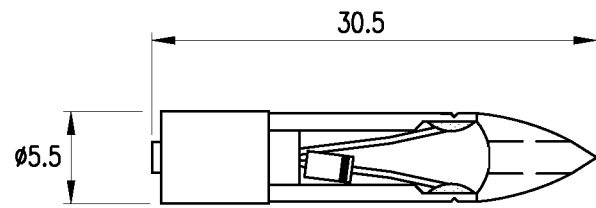


CHARACTERISTICS (@12VDC OPERATION)

COLOUR	LUMINOUS INTENSITY (TYPICAL)	FORWARD CURRENT	FORWARD VOLTAGE
RED	18 mcd	5mA TYP	12V TYP
YELLOW	30 mcd		
GREEN	133 mcd		
WHITE	80 mcd		
—	—		

OPERATING / STORAGE TEMP: -20°C to +80°C  
TYPICAL VIEWING ANGLE: 120°

ORDERING INFORMATION:

WHEN ORDERING, PLEASE STATE TYPE NUMBER, SPECIFYING VOLTAGE AND LED COLOUR REQUIRED:

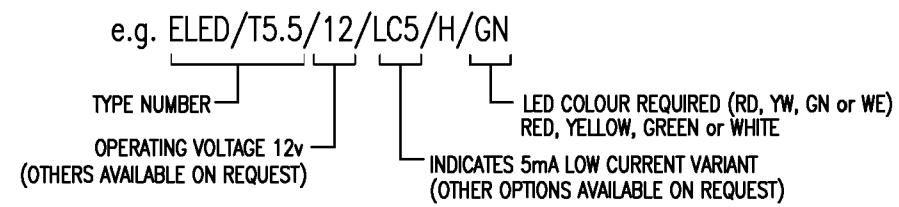

MATERIAL AS SUPPLIED	DRAWN DARREN ROY
FINISH N/A	CHECKED T. DAVIS
PLATING -	APPROVED BA08 / 144
TOLERANCE ± 1.0 (UOS)	DATE 27 FEB 08
REMARKS (LOW CURRENT 5mA VARIANT)	
TITLE T5.5 SLIDE BASE 5mA LOW CURRENT LED INDICATOR	