

TECHNICAL CHARACTERISTICS


MATERIAL  
INSULATOR: LCP  
FLAMABILITY RATING: UL94-V0  
COLOR: BLACK  
CONTACT MATERIAL: COPPER ALLOY  
CONTACT TYPE: STAMPED  
CONTACT PLATING: SELECTIVE GOLD  
SHIELDING: STAINLESS STEEL  
QUALITY CLASS: 10000 MATING CYCLES

ENVIRONMENTAL  
OPERATING TEMPERATURE: -25 UP TO 85°C  
COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL  
CURRENT RATING: 0.5A  
WORKING VOLTAGE: 100VAC  
INSULATOR RESISTANCE: >1000 MOHM  
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC/MN  
CONTACT RESISTANCE: 100 MOHM MAX

SOLDERING  
REFLOW PROCESS ONLY

PACKAGING  
TAPE & REEL



RoHS Compliant			
C	12-FEB-16	TKP	GG
B	10-JAN-12	CARD DETECT	GG
A	11-AUG-31	PDF	GG
REV	DATE	FILE	BY



GENERAL TOLERANCE  
.X = +/- 0.2  
.XX = +/- 0.15



APPROVAL: RJ

UNIT: MM  
SCALE:  
SHEET: 1/2  
DRAW: VICKY

DESCRIPTION: Micro SD Card Connector - Push & Push - With Card Detection  
8 pins  
WERI PART NO: 693 071 010 811

SIZE  
**A4**

1





2

3

4

5

PULL OUT DIRECTION

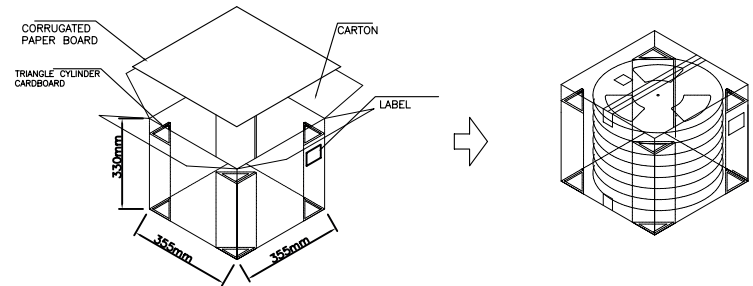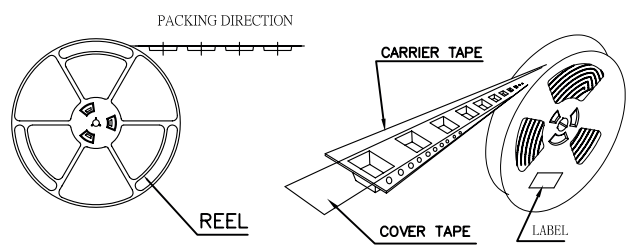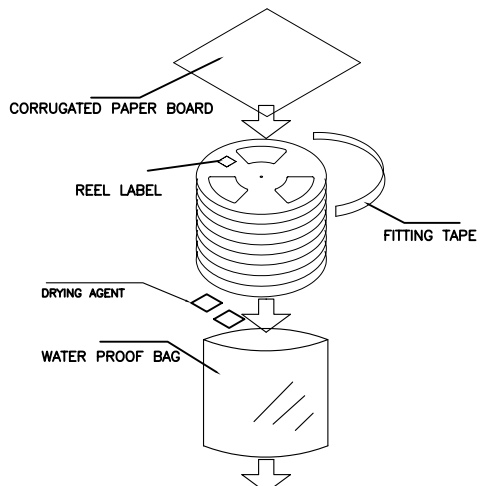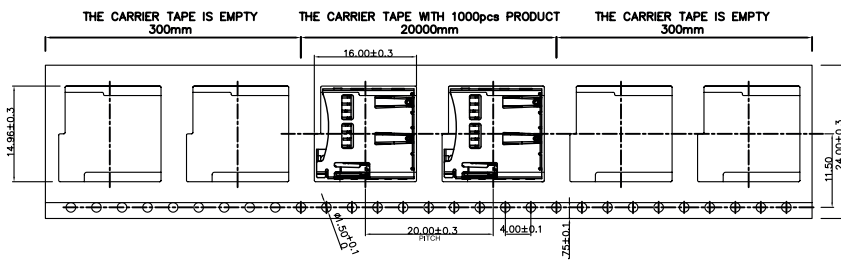

1000PCS/Reel,10000PCS/Carton.

RoHS Compliant				PROJECTION:	GENERAL TOLERANCE		DESCRIPTION: Micro SD Card Connector - Push & Push - With Card Detection 8 pins	SIZE <b>A4</b>
					$.X = \pm 0.2$ $.XX = \pm 0.15$			
				APPROVAL: RJ	UNIT: MM	WERI PART NO: 693 071 010 811		
					SCALE:			
REV	DATE	FILE	BY		SHEET: 2/2			
					DRAW: VICKY			

A

B

C

D