
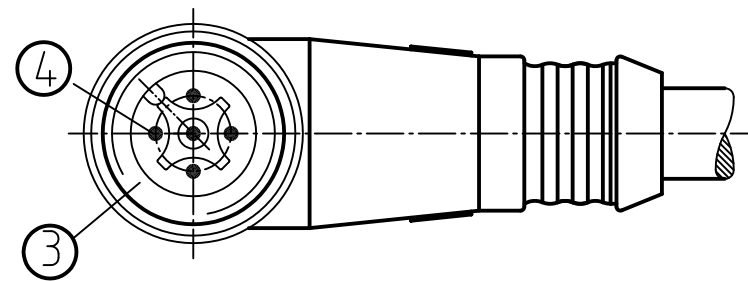



FINISHED LENGTH (SEE TABLE)

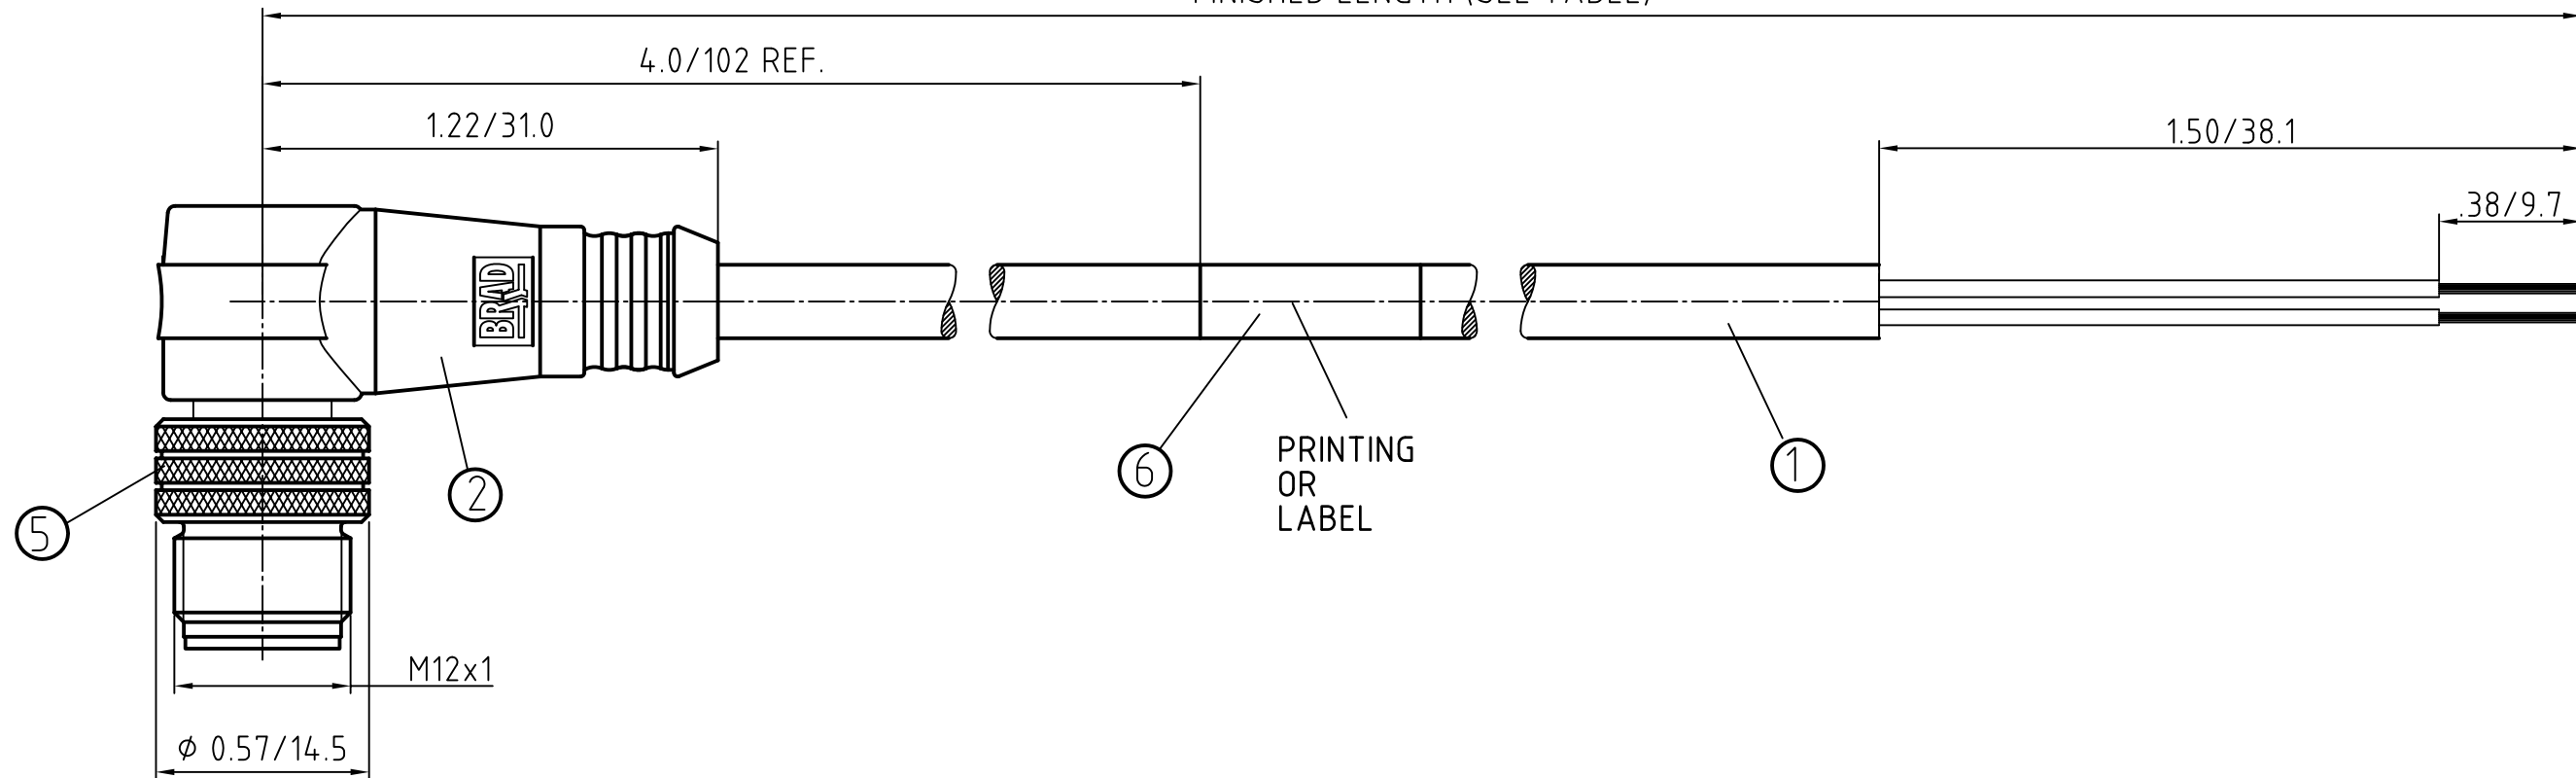

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C

ITEM	COMPONENT	MATERIAL	FINISH
6	LABLE	MYLAR	BLACK/YELLOW
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	PUR	BLACK
2	OVERMOLD	POLYURETHANE (PUR)	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	JACKET: PUR	BLACK

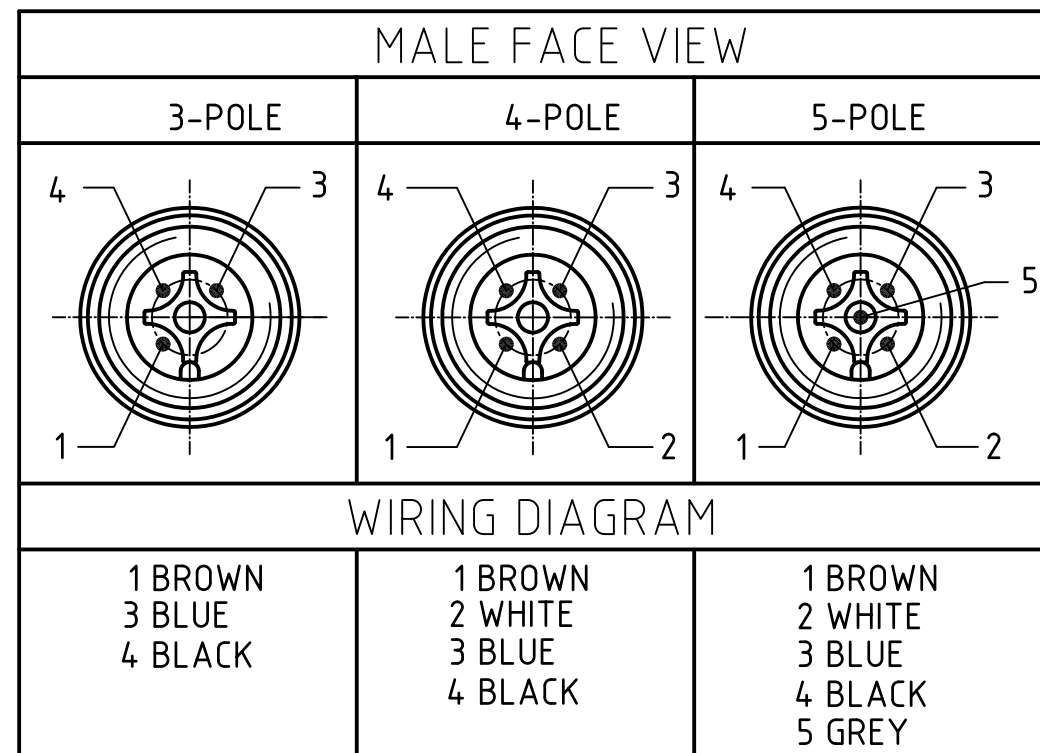

DESCRIPTION EC NO.: WEU2010-0284 DRWN: LSTEMMLE 2010/01/20 CHK'D: NS APPR: NSTAUDIG 2010/01/26	QUALITY SYMBOLS ▽ = 0 ▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±--- ±.01 1 PLACE ±0.3 ±--- ANGULAR ± --- °	DRAWN BY DATE	MICRO-CHANGE CORDSET 3/4/5-P. M 90 SE 22/3-5 BLACK PUR CABLE				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	CHECKED BY DATE 2010/01/21	MOLEX INCORPORATED				
		1 REV	APPROVED BY DATE NSTAUDIG 2010/01/25	MATERIAL NO. SEE TABLE SHEET 2	DOCUMENT NO. SD-120065-045	SHEET NO. 1 OF 1		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200060288	803007P03M020	6.56' +3.5" -0 [2.0M +89 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200060592	804007P03M020	6.56' +3.5" -0 [2.0M +89 -0]
4	1200652145	804007P03M040	13.12' +6.5" -0 [4.0M +165 -0]
4	1200060594	804007P03M050	16.40' +6.5" -0 [5.0M +165 -0]
4	1200652146	804007P03M060	19.69' +6.5" -0 [6.0M +165 -0]
4	1200060595	804007P03M100	32.81' +12.5" -0 [10.0M +318 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200060697	805007P03M020	6.56' +3.5" -0 [2.0M +89 -0]
5	1200060699	805007P03M040	13.12' +6.5" -0 [4.0M +165 -0]
5	1200658186	805007P03M050	16.40' +6.5" -0 [5.0M +165 -0]
5	1200652149	805007P03M060	19.69' +6.5" -0 [6.0M +165 -0]
5	1200655006	805007P03M100	32.81' +12.5" -0 [10.0M +318 -0]

DESCRIPTION EC NO: WEU2010-0284 DRWN: LSTEMMLE 2010/01/20 CHKD: NS APPR: NSTAUDIG 2010/01/26 REV 1	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	$\nabla = 0$ $\nabla \text{C} = 0$	mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±--- ±.01 1 PLACE ±0.3 ±--- ANGULAR ± --- °	IN/MM	2:1	METRIC	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY: RE DATE: 2010/01/21	MICRO-CHANGE CORDSET 3/4/5-P. M 90 SE 22/3-5 BLACK PUR CABLE		
			APPROVED BY: NSTAUDIG DATE: 2010/01/25	MOLEX INCORPORATED		
			MATERIAL NO. SEE TABLE SIZE A3	DOCUMENT NO. SD-120065-045 SHEET NO. 1 OF 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	