
	10	9	8	7	6	5	4	3
--	----	---	---	---	---	---	---	---

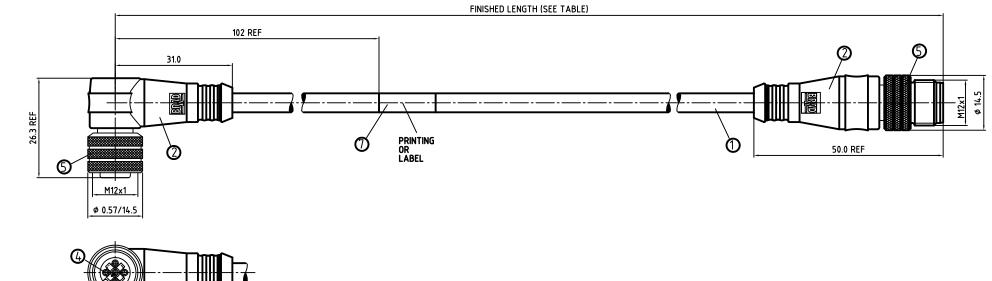

FEMALE FACE VIEW								
3-POLE	4-POLE	5-POLE						
		3 4 - 5 4 5						
	WIRING DIAGRA	М						
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GREY						

8

7

	MALE FACE VIE	EW
3-POLE	4-POLE	5-POLE
V	VIRING DIAGRAN	1
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GREY

CONNECTOR	SPECIFICATION:
-----------	----------------

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C

9

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	0-RING	VITON	RED
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	PUR	BLACK
2	OVERMOLD	POLYURETHANE (PUR)	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	JACKET: PUR	BLACK

	Z & 200 00 00 00 00 00 00 00 00 00 00 00 00									RANCES	DIMENSION STYLE		
										FIED)	IN/MM		
	_ ∞	2010		2010					mm	INCH	DRAW	N BY	DATE
	TION -0288				z	V = 0	4 PLAC	ES	±	±	LSTE	MMLE	2010/0
	E 9	щ		(D	TION		3 PLAC	ES	±	±	CHECK	ED BY	DATE
	DESCRIPTION WEU2010-028	STEMMLE		AUDIG	DESCRIF	\ ℃ ∕= 0	2 PLAC	ES	±	±.01	RE		2010/0
	E SC	Ш		TAI	DES.		1 PLAC	ЭE	±0.3	±	APPRC	VED BY	DATE
		.rs	NS.	NST.			A	NG	ULAR ±	• °	NSTA	UDIG	2010/0
	ÖN	Ň	Ô	Ř								IAL NO.	
	EC	DRV	CH'KD	APPI			DRAFT		HERE API JST REMA		SEE	TABL	E SHEE
	ш		0		-		wi ⁻		N DIMENS		SIZE	THI	S DRAWIN
		1			REV						A3	INCO	RPORATE
6						5			2	4			3

10

F


Е

D

С

В

А

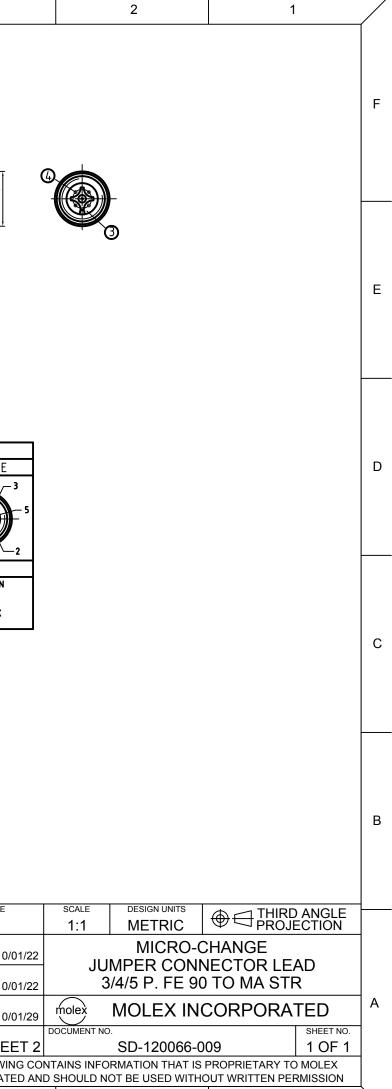

2

1

	10	9	8	7	6		5	4	3	2	1	
F			ENGINEERING NUMBER		1				ENGINEERING NUMBER	FINISHED LE	NGTH	F
	PUL	1200070142		FINISHED LENGTH			P0 4	1200060056	884031P03M010	1.0M +55.6 -0 [3.28		
									I			
Е												E
D												D
с	POL	MATERIAL NUMBER		FINISHED LENGTH	1							С
U	5	1200668188	885031P03M010	1.0M +55.6 -0 [3.28' +2.1	19" –0]							
в												В
						0 1 0			DIMENSION STYLE	SCALE DESIGN UNITS		_
						2010/01/22	SYMBOLS (GENERAL TOLERANCES UNLESS SPECIFIED) mm INCH	IN/MM DRAWN BY DATE	1:1 METRIC MICRO-0		N N
						KIPTION 010-028 ILE 2	$\mathbf{\nabla} = 0 4 \text{ Pl}$	LACES ± ± LACES ± ±	LSTEMMLE 2010/01/22 CHECKED BY DATE RE 2010/01/22	JUMPER CON	NECTOR LEAD TO MA STR	
А						DESCR WEU2C LSTEMM NSTALIC		LACES ± ±.01 'LACE ±0.3 ± ANGULAR ± °			CORPORATED	A
						DESCRIPTION EC NO: WEU2010-0288 DRWN: LSTEMMLE 2010 CH'KD: NS APPR: NSTALIDIG 2010	DR	AFT WHERE APPLICABLE MUST REMAIN	MATERIAL NO. D	OCUMENT NO. SD-120066-0		1
			_				REV	WITHIN DIMENSIONS	A3 INCORPORATED AND S	AINS INFORMATION THAT IS SHOULD NOT BE USED WITH	OUT WRITTEN PERMISSION	
	10	9	8	7	6		5	4	3	2	1	