




FACE VIEW

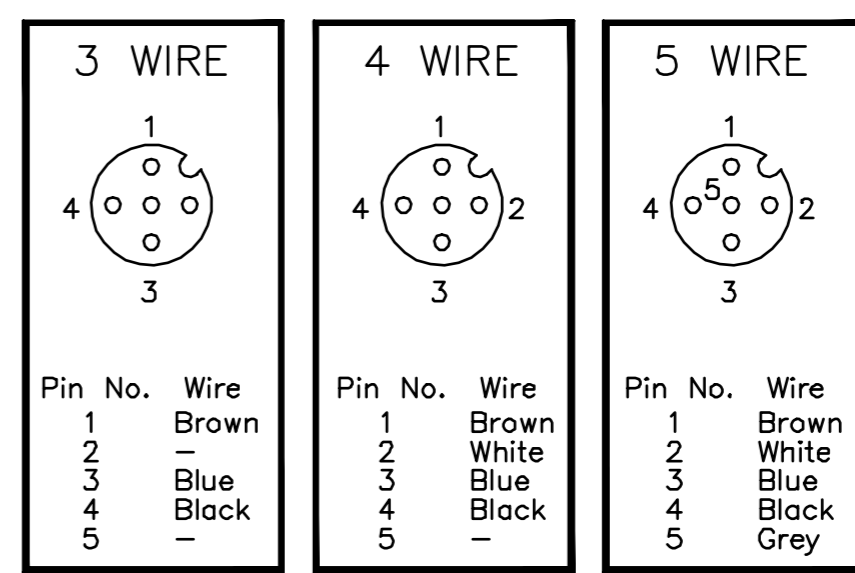

PART No MATRIX

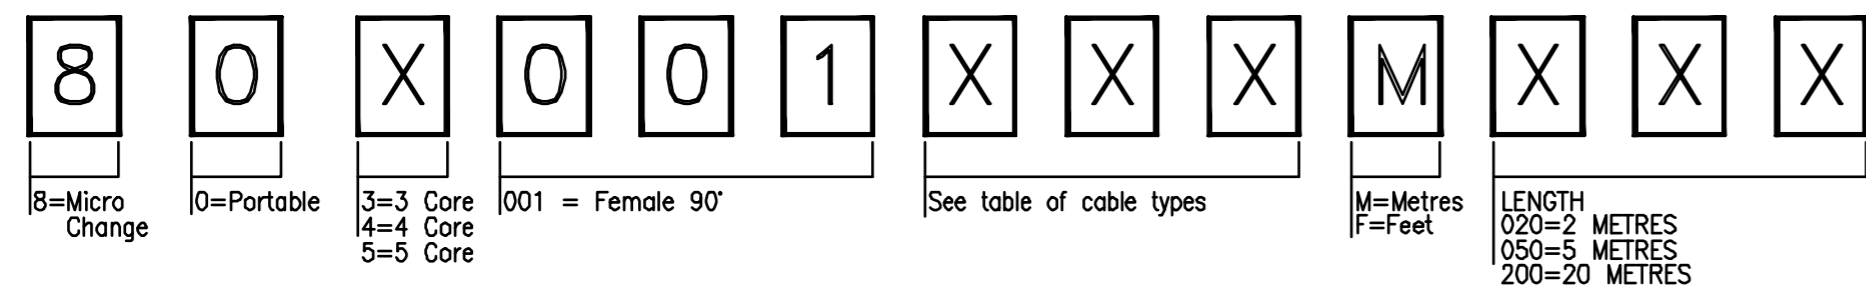

OPTIONS

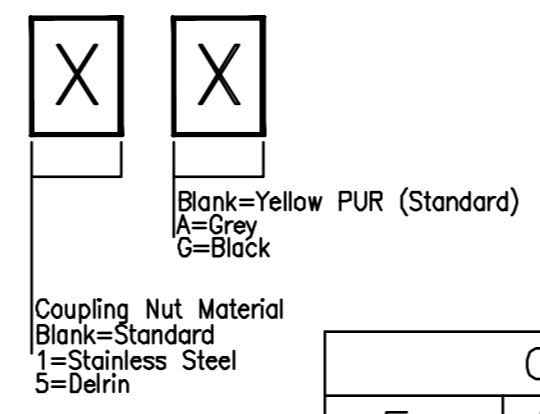

Specification.

(See alternative variations in matrix key)
 Insert Material – PUR (30% Glass Filled)
 Contact Material – Brass (CuZn36)
 Contact Plating – 2um Ni, 0.70um Gold
 Coupling Nuts – See Table
 Seal – Viton O-Ring
 Protection Class – IP68
 Voltage Rating – 300V
 Contact Current Rating – 4 Amps
 Overmoulding – PUR

Cable	Coupling Nut Material	Overmould
Exx	Nickel Plated Brass	PUR
H0x	Nickel Plated Brass	PUR
H52	Teflon Coated Brass	PUR
I0x	Nickel Plated Brass	PUR
I2x	Teflon Coated Brass	PUR
Lxx	Nickel Plated Brass	PUR
Mxx	Nickel Plated Brass	PUR
Pxx	Nickel Plated Brass	PUR
P8x	Teflon Coated Brass	PUR
S2x	Teflon Coated Brass	PUR



This drawing and its contents are the proprietary and confidential property of Woodhead Industries Inc. and/or its subsidiaries and may not be used or disclosed to others without the express prior written consent of Woodhead Industries Inc. and/or its subsidiaries.

Applicable Standards ASME Y14.5M ISO 1660		
NAME	DATE	
Drawn	J.WRIGHT	31.03.04
Checked	J.WRIGHT	31.03.04
Approved	N.WITTS	31.03.04

Material SEE SPECIFICATION
 Finish SEE SPECIFICATION
 Dimensions In MM
 0.0 ± 0.25mm
 0.00 ± 0.10mm
 0.000 ± 0.025mm
 Angles ± 1°

Part No. 80X001XXXMXXX Size A4

Description MICRO CHANGE 80 SERIES PORTABLE 90° CONNECTOR LEAD

Drawing No. 80X001XXXMXXX Rev A

Scale NTS SHEET 1 OF 1

N/A	A	JDW	NEW ISSUE	31.03.04	NW
ECN	Rev	By	Descriptions	Date	Approved

