

PF 65.000

Filterfan

PFA 60.000

Exhaust filter



- Installation size 6, air flow rate up to 505 m³/h
- Three performance classes, cut-out compatible
- System of protection IP 54 and IP 55, NEMA type 12
- UL, cUL approval
- UV-resistance (IP 55 version)
- Cut-out compatible with installation size 6 from the 3rd Generation (see page 150) and with air conditioner unit DTFI 9021 (see page 26)

Data		PF 65.000		Unit
Article number	IP 54	11665102055	11665152055	
	IP 55	11665103055	11665153055	
AC 50 Hz / 60 Hz				
Rated voltage ± 10 %		230	115	V
Unimpeded airflow	IP 54	480 / 480		m ³ /h
	IP 55	505 / 505		
Air flow rate in combination (PF + PFA 60.000)	IP 54	370 / 370		
	IP 55	380 / 380		
Power consumption		65 / 80	75 / 90	W
Current consumption		0.3 / 0.36	0.66 / 0.8	A
Noise level (according to EN ISO 3741)	IP 54	54 / 52		dB(A)
	IP 55			
Weight		3.2		kg
Type of connection		spring-type terminal		
Fuse		6		A
System of protection according to EN 60529 / UL 50	IP 54	NEMA type 12 - standard filter		
	IP 55	NEMA type 12 - fluted filter		
Filtration efficiency	IP 54	91		%
	IP 55			
Filter mat quality class ¹	IP 54	G 4		
	IP 55			
Duty cycle		100		%
Bearing type		ball bearing		
Service life L ₁₀ (+ 40 °C) ²		40000		h
Temperature range		- 15 ... + 55 / + 5 ... + 131		°C / °F
Design (housing and protection against accidental contact)	IP 54	made of injection-moulded thermoplastic, self-extinguishing, UL 94 VO		
	IP 55	additional: UV-resistant		
Colour		RAL 7035 ³		
Accessories	Piece	Article number		Information on page
Exhaust filter PFA 60.000	IP 54	1	11760002055	149
	IP 55	1	11760003055	149
Thermostat	1		17121000000	149

¹ according to DIN EN 779


² fan failure is defined as being when the current and speed deviate or the operating noises are out of the ordinary

³ different colours available on request

Approvals see page 111


Cooling capacity performance curve

PF 65.000 IP 54

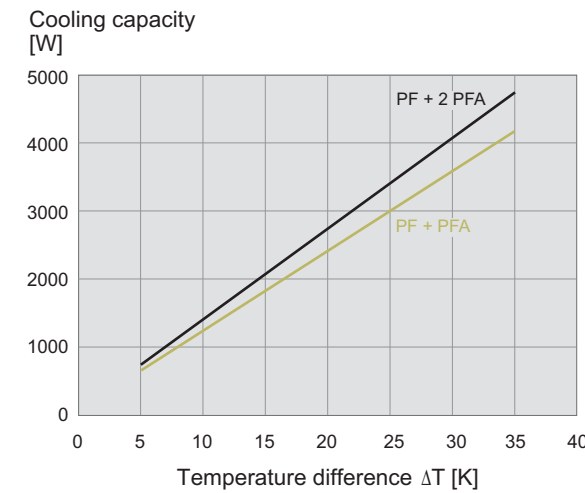


Static pressure performance curves


PF 65.000 IP 54

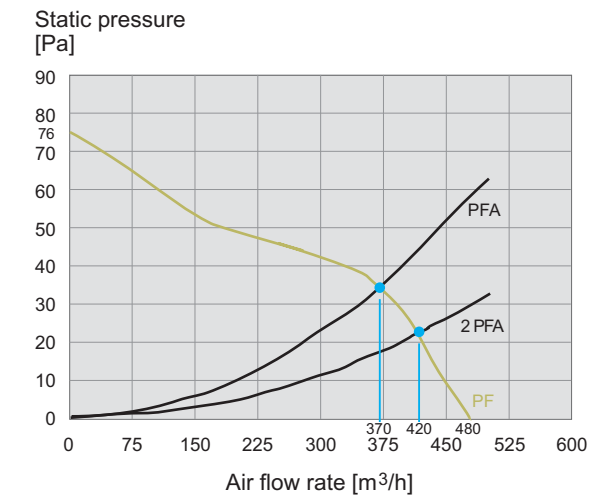

PF 65.000 IP 55

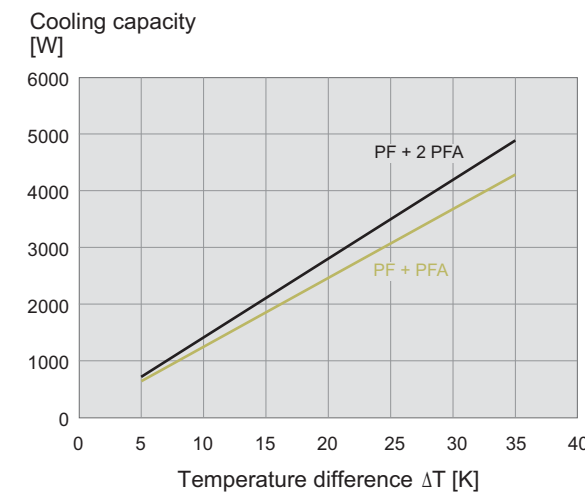

PF 65.000 IP 55

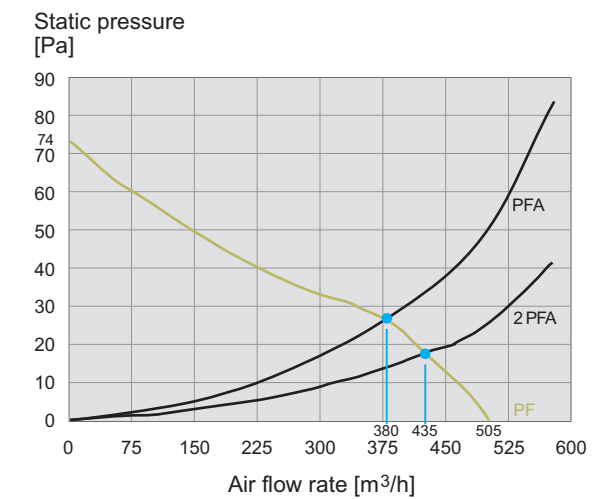

Dimensions

mm	PF 65.000	PFA 60.000
X	320	320
Y	320	320
Z1	7	7
Z2	150	39
A ¹	291	291
B ¹	291	291

¹ for material thicknesses up to 2 mm
+1 mm for thickness of material > 2 mm ≤ 3 mm

