various plating options. A range of high quality UK manufactured phono plugs made from machined brass with

-Centre contact available in solid pin.

-Ground contact with unique 'T' shape slot for maximum contact area.

-Internal cable clamp for secure cable connection.

-Spring strain relief.

-Colour coded ID rings for easy cable identification.

-Attractive body styling.

-Maximum cable size 5.5mm

Insulation resistance –  $100M \Omega$  at 500 VdcRating – 5A at 200 Vdc/150 Vac max.

Material


Ground contact :Brass, flash gold plated Centre contact :Brass, flash gold plated

Insulation :Noryl SE1

Cable clamp :Brass, flash gold plated

Spring :Brass, flash gold plated :Spring steel, flash gold plated

IDENTIFICATION RING

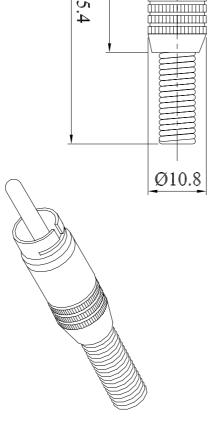

37.2

55.4

334-0700	334-0600	334-0500	334-0200	334-0100	334-0000	Deltron Part No.
FLASH GOLD PLATED (YELLOW ID RING)	FLASH GOLD PLATED (WHITE ID RING)	FLASH GOLD PLATED (RED ID RING)	FLASH GOLD PLATED (BLUE ID RING)	FLASH GOLD PLATED (BLACK ID RING)	FLASH GOLD PLATED	Description

CONVERTED FROM PS0358 ISS2 (04.01.94) IN JAN 2003

Components

DrgNo 334 SERIES

TITLE PROFESSIONAL PHONO LINE PLUG SPECIFICATION

CUSTOMER Aprvd Date 31/01/03

Aprvd By  $\leq$ Drwn by

FILTER

ALL DIMENSIONS IN MM ANGLES IN DECIMAL DEGREES

BS

Scale:

© Deltron Emcon Limited E-Mail components@deltron-emcon.com, Website www.deltron-emcon.com.

FOR

334 SERIES