
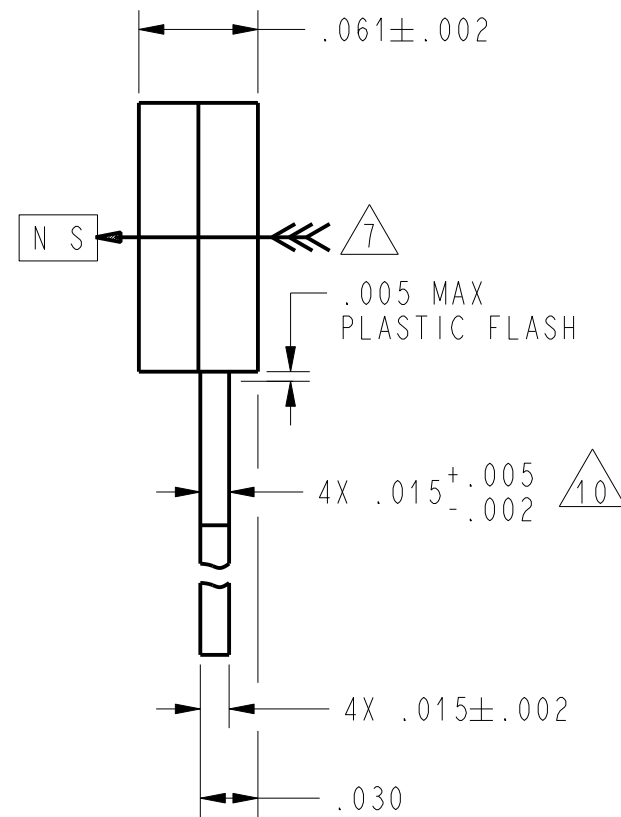
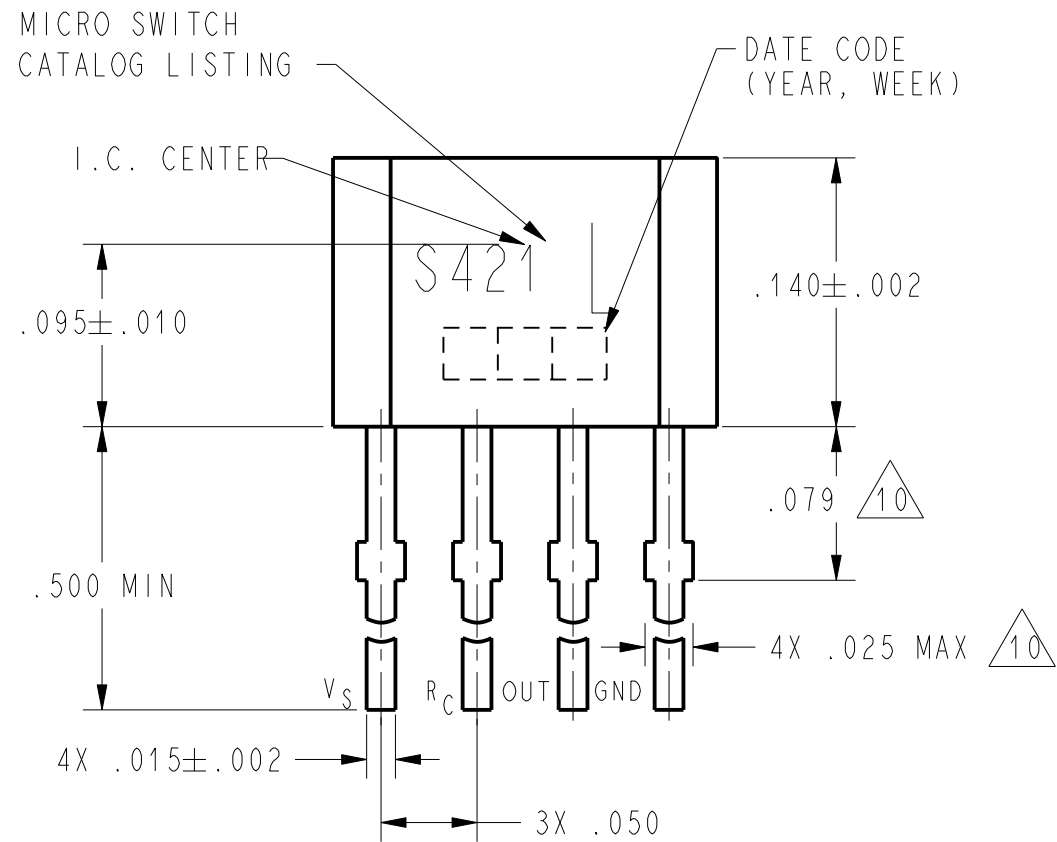


LOW WHEN FREQUENCY IS GREATER THAN SET POINT

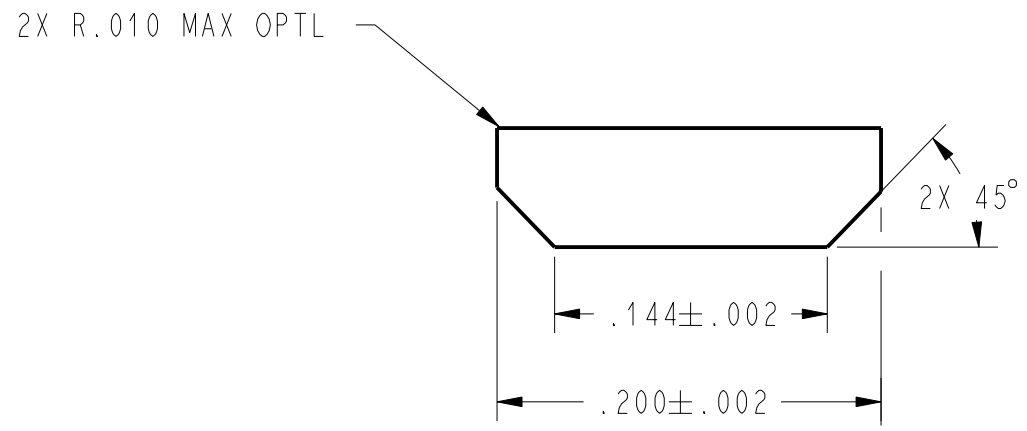

1. ABSOLUTE MAXIMUM RATINGS <sup>9</sup>  
(Circuit function is not guaranteed. If exceeded, permanent damage may result)

ITEM	PARAMETER	MIN	MAX	UNIT	CONDITIONS
1.1	AMBIENT TEMPERATURE	-40	+125	°C	Storage, no power applied
1.2	AMBIENT TEMPERATURE	-40	+105	°C	Operating, power applied
1.3	SUPPLY VOLTAGE	-25	+25	VDC	-40°C to +105°C ambient temperature
1.4	VOLTAGE AT OUTPUT	-0.5	+25	VDC	off condition of output over temperature
1.5	OPEN COLLECTOR NPN		+20	mA	Operated over temperature, Current sinking output inverted or non-inverted

2. ELECTRICAL CHARACTERISTICS  
(over operating temperature and voltage range unless otherwise noted)  
REQUIRED -25°C TO +105°C AMBIENT

ITEM	PARAMETER	MIN	MAX	UNIT	CONDITIONS
2.1	SUPPLY VOLTAGE (V <sub>s</sub> )	4.5	16	VDC	
2.2	SUPPLY CURRENT (I <sub>s</sub> )		15	mA	Output released, V <sub>s</sub> =16V T <sub>J</sub> =+25°C
2.3	SUPPLY CURRENT (I <sub>s</sub> )		15	mA	Output operated, V <sub>s</sub> =16V T <sub>J</sub> =+25°C
2.4	OUTPUT VOLTAGE		0.4	VDC	Sinking 15mA, V <sub>sat</sub>
2.5	OUTPUT LEAKAGE CURRENT		10	uA	Output at 25V
2.6	RISE TIME (10% TO 90%)		1.5	uS	V <sub>s</sub> =12V, R=800ohms, C=50pf
2.7	FALL TIME (90% TO 10%)		1.5	uS	V <sub>s</sub> =12V, R=800ohms, C=50pf

3. MAGNETIC CHARACTERISTICS <sup>8</sup>  
(over operating temperature and voltage range unless otherwise noted)  
REQUIRED -25°C TO +105°C AMBIENT

ITEM	PARAMETER	MIN	MAX	UNIT	CONDITIONS
3.1	OPERATE POINT		250	G	T <sub>a</sub> =+25°C (See note 3.1)
3.2	OPERATE POINT		250	G	-25°C TO +105°C (See note 3.1)
3.3	RELEASE POINT	-250		G	T <sub>a</sub> =+25°C
3.4	DIFFERENTIAL	50		G	-25°C TO +105°C (See note 3.2) Operate minus release


Frequency Trip Point (FTP)(RPM)

$$FTP = \frac{60}{RC \log \left[ \frac{Vr1 - IcR}{Vr2 - IcR} \right]}$$

Delay Time (DST) (Seconds)

$$DST = 7RC \log \left[ \frac{Vr2}{Vr1} \right] + \left[ \frac{720}{FTP} \right]$$

WHERE,  
R,C ARE EXTERNAL COMPONENTS  
Vr1=2 VOLTS Vr2=4 VOLTS  
Ic=196 uA  
LOG IS NATURAL LOG

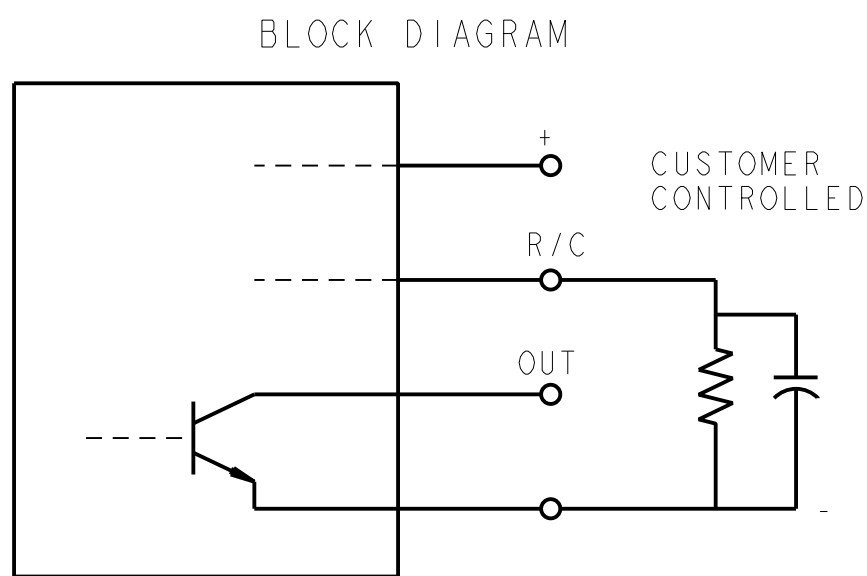

NOTES

- <sup>7</sup> THE MAGNETIC FLUX USED TO OPERATE THE SWITCH MUST BE IN THE DIRECTION AND LOCATION SHOWN (THIS ASSUMES THE CONVENTION THAT THE DIRECTION OF THE EXTERNAL FLUX OF A MAGNET IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET)
- <sup>8</sup> THE MAGNETIC FIELD STRENGTH (GAUSS) REQUIRED TO CAUSE THE SWITCH TO CHANGE STATE (OPERATE AND RELEASE) WILL BE AS SPECIFIED IN THE MAGNETIC CHARACTERISTICS. TO TEST THE SWITCH AGAINST THE SPECIFIED MAGNETIC CHARACTERISTICS THE SWITCH MUST BE PLACED IN A UNIFORM MAGNETIC FIELD
- <sup>9</sup> ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THAT THE DEVICE WILL WITHSTAND WITHOUT DAMAGE TO THE DEVICE. HOWEVER, THE ELECTRICAL AND MAGNETIC CHARACTERISTICS ARE NOT GUARANTEED AS THE MAXIMUM LIMITS (ABOVE RECOMMENDED OPERATING CONDITIONS) ARE APPROACHED NOR WILL THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATING
- <sup>10</sup> DIMENSIONS NOTED ARE DUE TO TIE BAR REMOVAL AND ARE VALID ONLY IN .079 DIMENSION. BURRS EXTEND BACK FROM FRONT SURFACE ONLY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH  
a Honeywell Division

SOLID STATE SWITCH

CATALOG LISTING  
SS421L

ANSI Y14.5M-1982 APPLIES

FED. MFG. CODE 91929

THIRD ANGLE PROJECTION	
SCALE 10:1	
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE (.0)	±.030
TWO PLACES (.00)	±.015
THREE PLACES (.000)	±.005
ANGLES	±2°
WEIGHT	

SS421L  
 DRAWING NUMBER  
 6  
 ISSUE  
 P.T.C./CAD [20]  
 C.S.L. 15 MAY 03 CHECK SAV  
 15 MAY 03 CHECK  
 15 MAY 03 CHECK  
 X99396-SS  
 REPLACES  
 PR-21852  
 PAGE 1 OF 3  
 RELEASE NO.

4. TIMING CHARACTERISTICS  
(over operating temperature and voltage range unless otherwise noted. Does not include R & C shifts over temperature)  
REQUIRED -25°C TO +105°C AMBIENT

ITEM	PARAMETER	MIN	MAX	UNIT	CONDITIONS
4.1	TRIP POINT RANGE	1800	5200	PPM	Ta = 25°C (See note 4.1)
4.2	TRIP POINT TOLERANCE	-16.0	16.0	%	Variation from calculated value (See note 4.2)
4.3	TRIP POINT DELAY & POWER UP DELAY	5.0	16.0	SEC	Ta = 25°C, 1800 TO 5200 PPM
	DELAYED VERSION				
4.4	DELAY SET TIME TOLERANCE THE SMALLER OF 4.4.1 & 4.4.2	-40	+40	%	% of delay set time
	4.4.1				
4.4.2		-4.0	4.0	SEC	
4.5	PASSING DELAY FAIL TO PASS CONDITION		20	%	% of delay set time (See note 4.5)
4.6	EXTERNAL CAPACITOR LEAKAGE COEFFICIENT		0.05		(See note 4.6)

5. LATCH CHARACTERISTICS  
(over operating temperature and voltage range unless otherwise noted. External components must be connected between the output and the program/oscillator pin)  
REQUIRED -25°C TO +105°C AMBIENT

ITEM	PARAMETER	MIN	MAX	UNIT	CONDITIONS#
5.1	LATCH VOLTAGE	3.5	4.5	V	(See note 5.1)
5.11		2.0	4.5	V	at VS = 5.0
5.12					
5.2	LATCH CURRENT		1.0	mA	Sourcing (See note 5.2)

6. EXTERNAL R&C CHARACTERISTICS  
(over operating temperature and voltage range unless otherwise noted)  
REQUIRED -25°C TO +105°C AMBIENT

ITEM	PARAMETER	MIN	MAX	UNIT	CONDITIONS
6.1	EXTERNAL RESISTOR		±5	%	Directly related to 4.2 Trip Accuracy
6.2	EXTERNAL CAPACITOR		±5	%	Directly related to 4.2 Trip Accuracy
6.3	EXTERNAL CAPACITOR LEAKAGE COEFFICIENT		0.05		(See note 6.3)

3.1 Operate point is defined as the gauss level above which the internal circuitry will always be indicating the presence of a south pole at the IC surface.

3.2 Release point is defined as the gauss level below which the internal circuitry will always be indicating the presence of a north pole at the IC surface.

4.1 Trip point is the frequency in PPM (pulses per minute) that causes the output to change state. An inverted output is low when the speed is greater than the trip point. For example, a 2 pole magnet translates to 1 pulse/revolution while the 4 pole magnet translates into 2 pulses/revolution.

The trip point is externally adjustable by varying the value of R and C. Maximum required value of the external capacitor is 3.3 uF.

4.2 This is the accuracy required from unit to unit and includes R and C each varying ±5%, over speed, supply voltage, and temperature.

4.3 Trip point delay is the delay in output response to an input frequency below the trip point. The time delay is determined by the value of the external resistor and capacitor. Delayed version powers up in the passing condition.

4.5 Passing delay tolerance is based on delay set time, its tolerance is proportional to delay set time tolerance.

4.6 Capacitor leakage coefficient is used to calculate leakage current in the following formula:

$$\text{Leakage Current} = \text{Leakage Coefficient} \times \text{Capacitance} \times \text{Capacitor Voltage}$$

where capacitance is value of the external capacitor.

Capacitor Voltage is the actual variable voltage across the capacitor in operation.

5.1 The open collector output can be used to drive external circuitry that applies a latching voltage to the program/oscillator pin to latch the IC output in the fail state. This latch mode is to be used only on products with delay set times greater than 5 seconds and with inverted output version of the SS421L. Va = externally applied voltage on the RC pin.

5.2 Latching current is the sourcing current required of the applied external voltage to maintain the latch.

6.3 Leakage coefficient is the external capacitor leakage current coefficient such that:

$$\text{Leakage Current} = \text{Leakage Coefficient} \times \text{Capacitance} \times \text{Capacitor Voltage}$$

For example: Leakage Coefficient = 0.05; Capacitance = 3.3 uF; Capacitor Voltage at 3V; DC leakage current 0.49 uA.

P.T.C./CAD [20] DRAWN 15 MAY 03 CHECK SAV 15 MAY 03  
 C.S.L. 15 MAY 03 CHECK SAV 15 MAY 03  
 REVISIONS  
 A 0000297 15 MAY 03  
 DRAWING NUMBER  
 SS421L  
 M  
 PAGE 2 OF 3  
 RELEASE NO. PR-21852  
 REPLACES X99396-SS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**MICRO SWITCH**  
a Honeywell Division

**SOLID STATE SWITCH**

CATALOG LISTING  
**SS421L**

ANSI Y14.5M-1982 APPLIES  
FED. MFG. CODE 91929

THIRD ANGLE PROJECTION		
SCALE	NONE	
DO NOT SCALE PRINT		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		± 2°
WEIGHT		

TIMING TABLE


FREQUENCY TRIP POINT FTP =  $60 / (RC \ln((Vr1 - IcR) / (Vr2 - IcR)))$   
 INERTIAL DELAY SET TIME DST =  $7RC \ln(Vr2 / Vr1) + N * 60 / FTP$   
 In is the natural log

WHERE NOMINAL VALUE OF:

Vr1 = 2V  
 Vr2 = 2Vr1 = 4V  
 Ic = 196uA  
 N = 12  
 R, C = exterior components

External components: R (Kohm) and C (uF)  
 Target Timings: Frequency Trip Point (PPM)/Inertial Delay Set Time(s)#

R/C	1	1.2	1.5	1.8	2.2	2.7	3.3
39	3516/0.39	2930/0.47	2344/0.59	1954/0.71	1598/0.87		
43	3744/0.40	3120/0.48	2496/0.60	2080/0.72	1702/0.88		
47	3931/0.41	3276/0.49	2620/0.62	2184/0.74	1787/0.90		
51	4087/0.42	3406/0.51	2725/0.64	2271/0.76	1858/0.93		
56	4250/0.44	3542/0.53	2834/0.66	2361/0.79	1932/0.97		
62	4411/0.46	3676/0.56	2940/0.70	2450/0.84			
68	4542/0.49	3785/0.59	3028/0.73	2523/0.88			
75	4669/0.52	3890/0.62	3112/0.78	2594/0.93			
82	4773/0.55	3978/0.66	3182/0.82	2652/0.99			
91	4884/0.59	4070/0.71	3256/0.88				
100	4974/0.63	4145/0.76	3316/0.94				
110	5057/0.68	4214/0.81					
120	5126/0.72	4272/0.87					
130	5184/0.77	4320/0.92					
150	5277/0.86						1681/4.75
300	5315/0.91						1691/5.23
330					2077/4.67		1699/5.71
360					2085/5.06		1706/6.19
390					2092/5.45		1712/6.67
430				2577/4.87	2100/5.98		1718/7.30
470				2586/5.30	2107/6.50		1724/7.94
510			3169/4.68	2592/5.72	2112/7.02		1728/8.58
560			3177/5.12	2600/6.25	2118/7.68		1733/9.38
620			3823/4.70	3186/5.64	2607/6.89	2124/8.46	1738/10.34
680			3832/5.14	3193/6.16	2613/7.53	2129/9.25	1742/11/30
750			3840/5.65	3200/6.78	2618/8.28	2133/10.16	1745/12/42
820		4808/4.92	3847/6.16	3206/7.39	2623/9.03	2137/11.08	1749/13.54
910		4818/5.45	3854/6.81	3212/8.17	2628/9.99	2141/12.26	1752/14.98
1000	5790/4.98	4825/5.97	3860/7.46	3217/8.96	2632/10.95	2144/13.44	1755/16.42
1100	5798/5.46	4832/6.55	3865/8.19	3221/9.83	2636/12.02	2147/14.75	
1200	5805/5.95	4837/7.14	3870/8.92	3225/10.70	2639/13.08	2150/16.06	
1300	5811/6.43	4842/7.72	3874/9.65	3228/11.58	2641/14.15	2152/17.37	
1500	5820/7.40	4850/8.88	3880/11.10	3233/13.32	2645/16.28		
1600	5824/7.89	4853/9.46	3882/11.83	3235/14.20			
1800	5830/8.86	4858/10.63	3887/13.29	3239/15.94			
2000	5835/9.83	4862/11.79	3890/14.74	3242/17.69			
2200	5839/10.80	4866/12.96	3893/16.20				
2400	5842/11.77	4869/14.12					

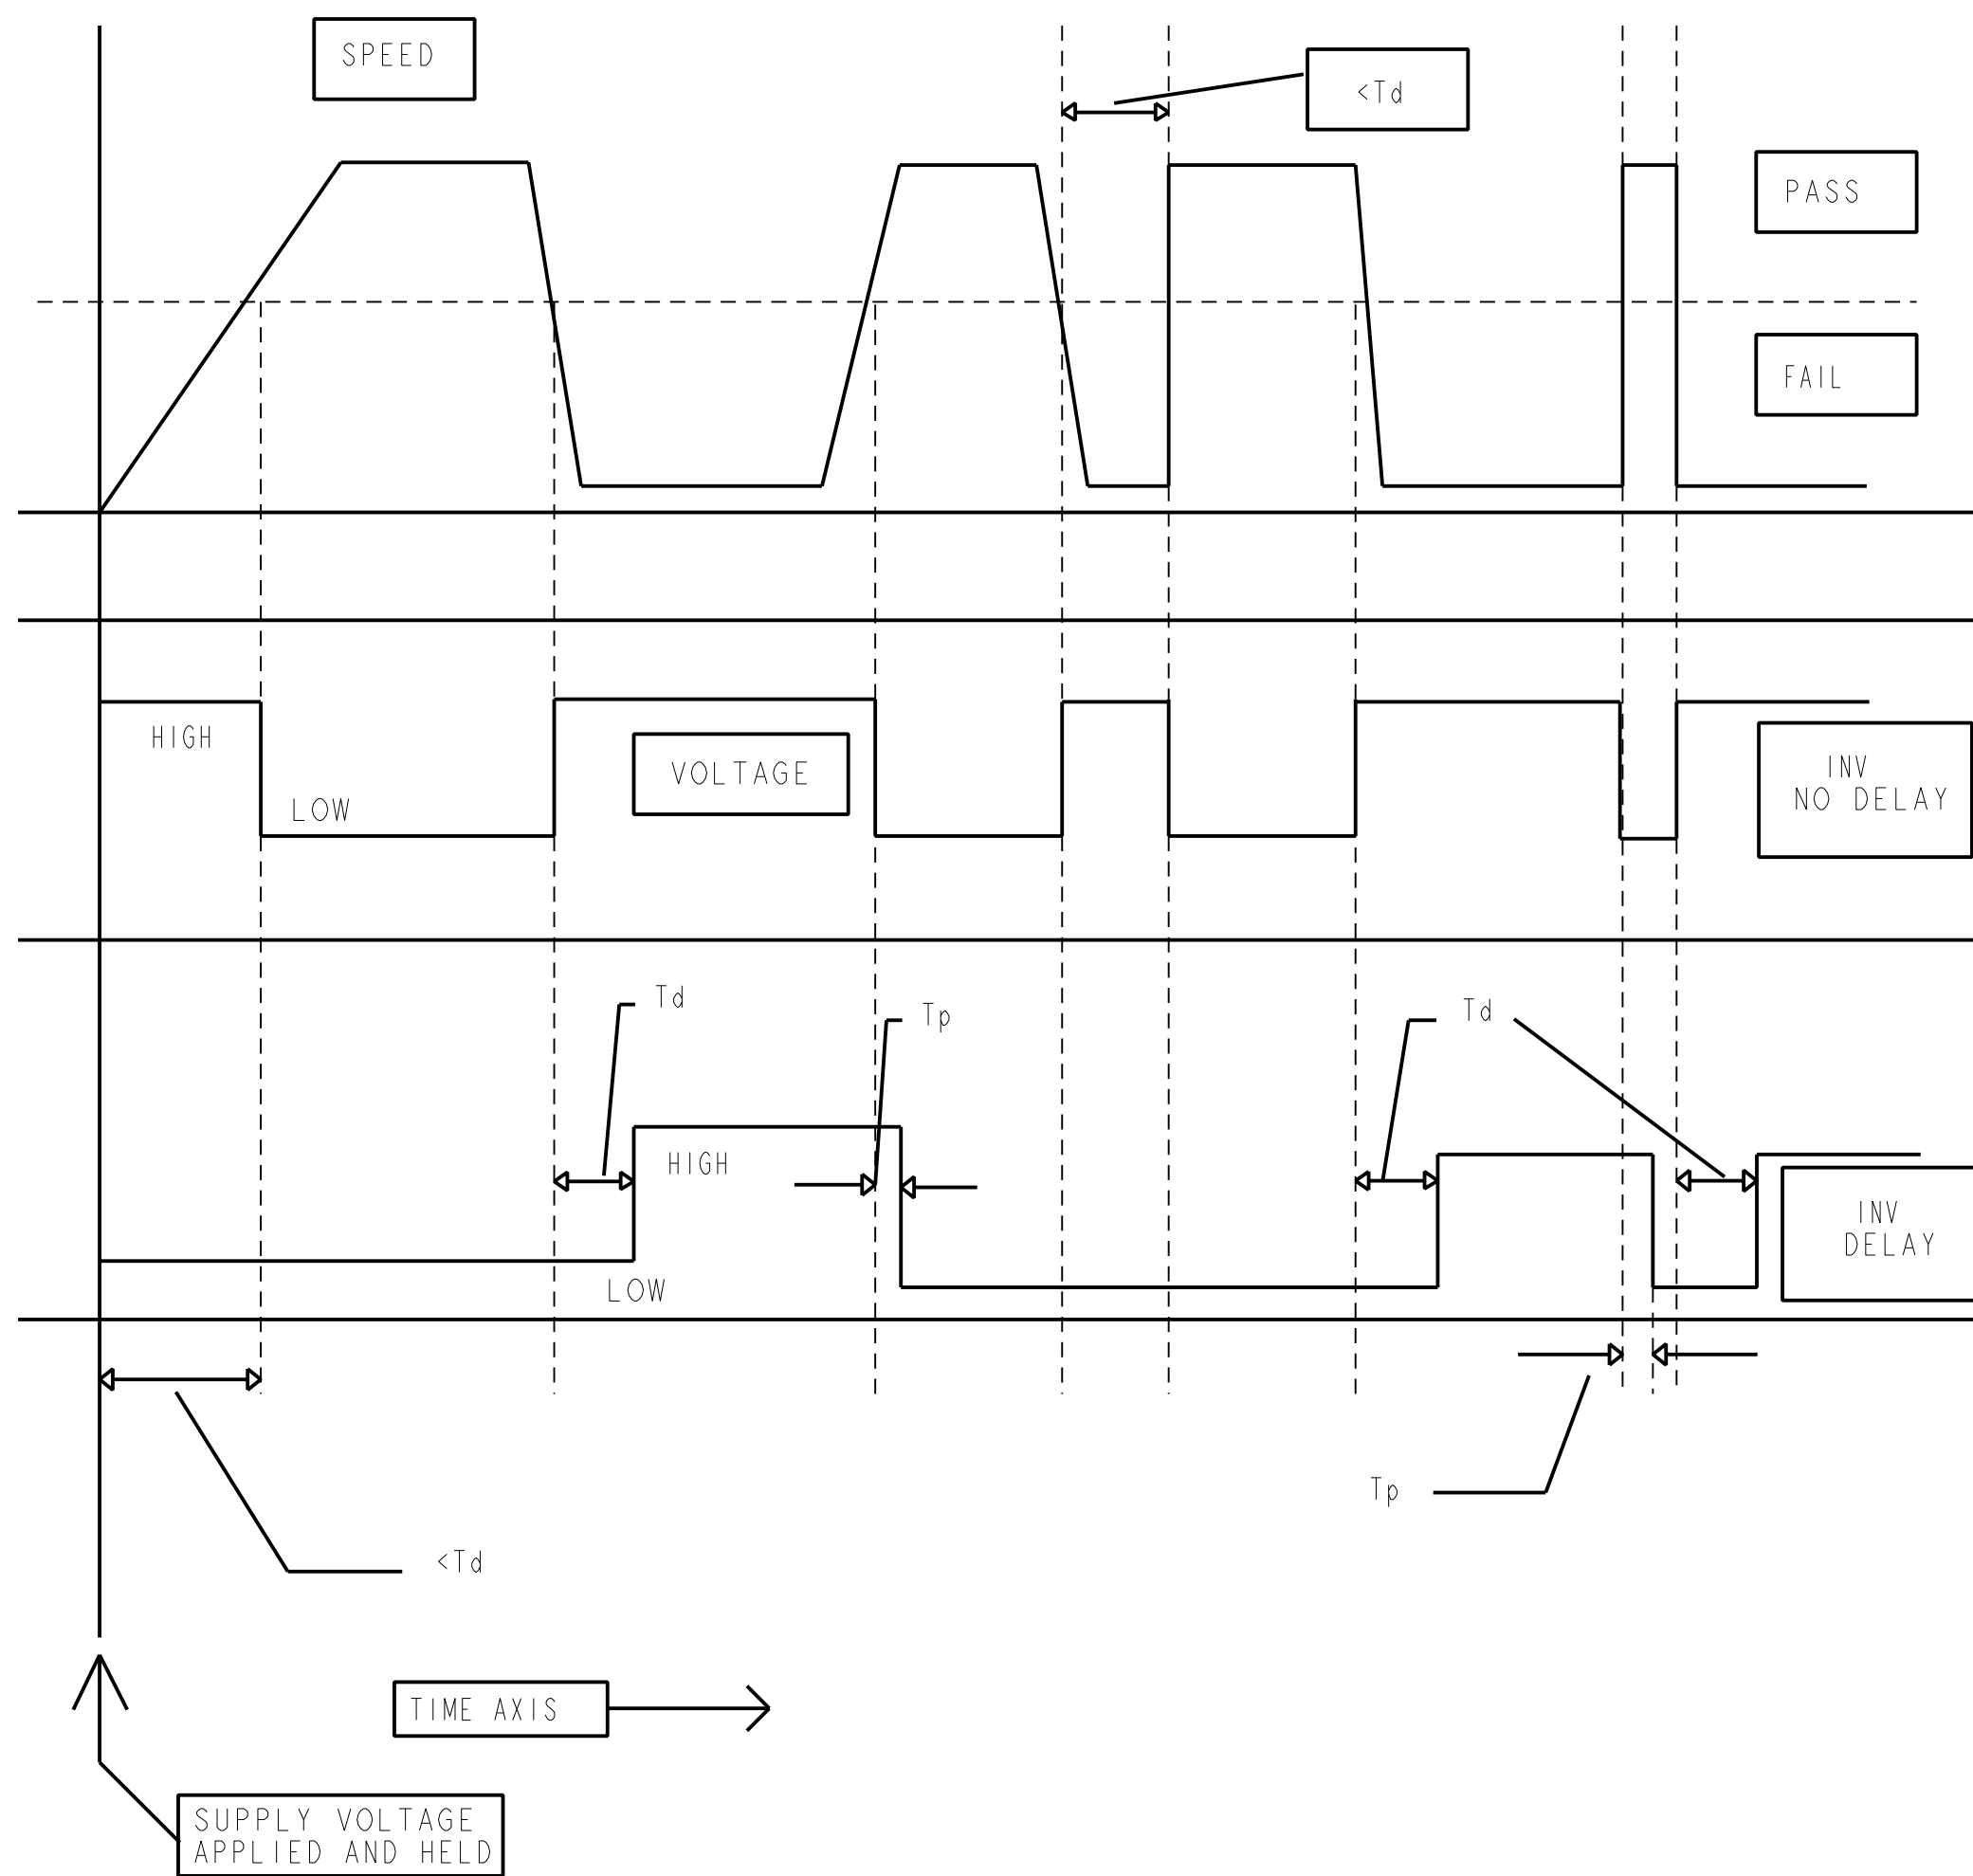

Td is the time delay after the pulses/min. go below the trip point. Td is set by the external RC.

Tp is the time delay after the pulses/min. go above the trip point. Tp is less than 20% of Td.

P.T.C./CAD [20] DRAWN C.S.L. 15 MAY 03 CHECK SAV 15 MAY 03  
 ISSUE 6 DRAWING NUMBER M 3 OF 3 RELEASE NO. PR-21852 REPLACES X99396-SS

REVISIONS  
 A 0000297  
 15 MAY 03

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

**MICRO SWITCH**  
a Honeywell Division

**SOLID STATE SWITCH**

CATALOG LISTING  
**SS421L**

FED. MFG. CODE 91929

THIRD ANGLE PROJECTION

SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		± 2°

WEIGHT