


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS

DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 680

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
844	A	RELEASED	JWM	7/30/01	JC	10/29/01	DJC	12/28/01

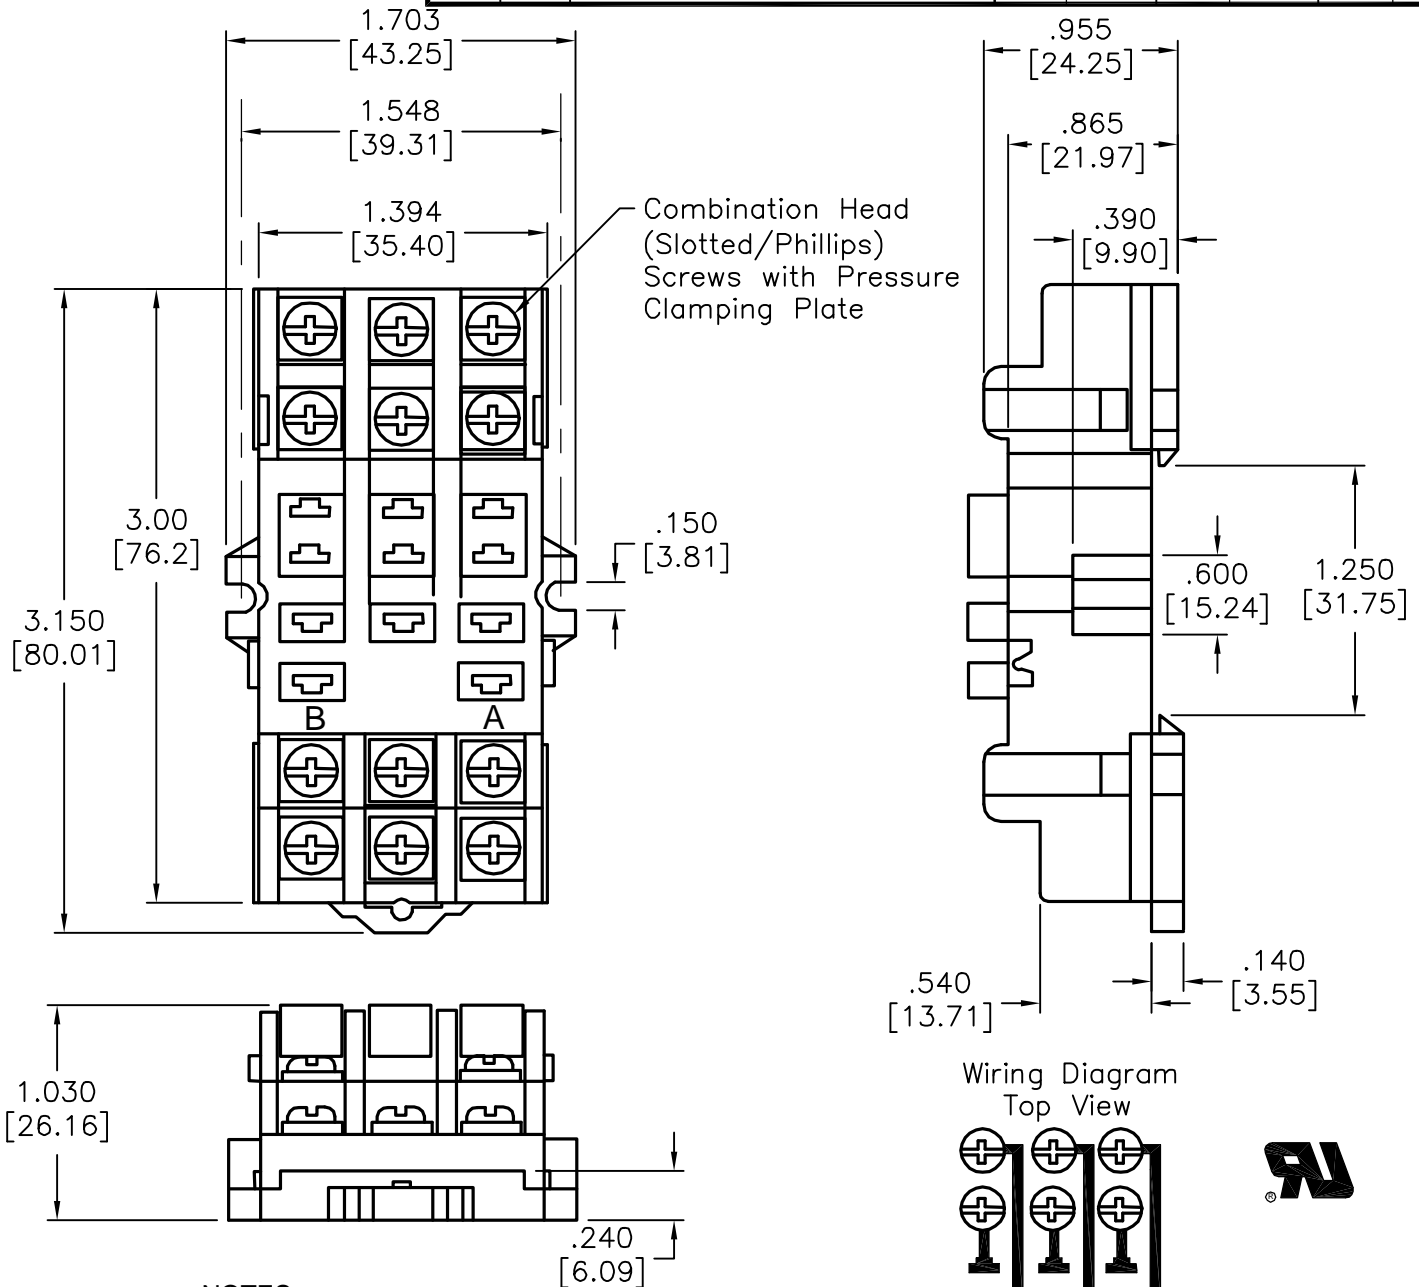

NOTES:

1. Electrical Rating: 300Vrms, 15 Amps
2. Dielectric Withstanding Voltage: 2000Vrms Between all electrical elements of opposite polarity including a metal mounting surface.
3. DIN Rail Mounting
4. 3/16" Quick Connect plug-in receptacle
5. Base: Gray, break resistant thermoplastic (closed back)

SPC-F004.DWG

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	7/30/01
CHECKED BY:	DATE:
JOHN COLE	10/29/01
APPROVED BY:	DATE:
Daniel Carey	12/28/01

DRAWING TITLE:
11 Position Relay Socket - DIN Rail Mount

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC9799	95B7501.dwg	A

SCALE: NTS U.O.M.: INCHES [mm] SHEET: 1 OF 1