


4.20mm (.165") Pitch Mini-Fit BMI Slide-and-Lock™ Receptacle

44516

Dual Row, Panel Mount

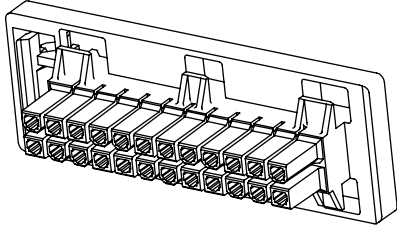

Features and Benefits

- Blindmating panel mount connector
- Designed for wire-to-board or wire-to-wire applications
- Fully isolated silos to protect contacts from damage
- Slide-and-Lock feature allows receptacles to be installed and removed many times

Reference Information

Packaging: Tray
 UL File No.: E29197
 CSA File No.: LR19980
 TUV License: Pending
 Mates With: 42440, 42404, 43759, 46011, 44068, 43810, 43879, 46099 or 46100 headers and 42475 or 43770 plug housings
 Use With: 46083, 5556, 45750 or 46018 terminals
 Panel Thickness: 1.19 to 1.57mm (.047 to .062")
 Designed In: Millimeters

Physical


Housing: PBT polyester, UL 94V-0
 Operating Temperature: -40 to +105°C

Circuits	Order No.	Lead-Free	
4	Contact Molex	Yes	
6			
10			
14			
18			44516-0009
24			44516-0012
36	44516-0013		

4.20mm (.165") Pitch Mini-Fit BMI™ Receptacle

42474

**Dual Row
With Panel Mount Ears**



Features and Benefits

- Blind mating panel mount receptacle
- For wire-to-wire and wire-to-board applications
- Fully isolated terminals to protect contacts from damage

Reference Information

Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 TUV License No.: R75142
 Mates With: 42404, 42440, 43810, 43879, 44068, 46011, 46099 and 46100 headers or 42475 plug
 Use With: 5556, 46083, 45750 or 46018 terminals
 Panel Thickness: 0.97 to 1.57mm (.038 to .062")
 Designed In: Millimeters

Physical

Housing: 6/6 nylon, UL 94V-2 or 94V-0
 Operating Temperature: -40 to +105°C

Circuits	Order No.	
	94V-2	94V-0
4	15-06-0040	15-06-0041
6	15-06-0060	15-06-0061
8	15-06-0080	
10	15-06-0100	15-06-0101
14	15-06-0140	15-06-0141
18	15-06-0180	15-06-0181
24	15-06-0240	15-06-0241