


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
190	A	RELEASED	D.J.C.	8/17/98	JC	10/16/98	JWM	10/26/98
1255	B	UPDATED SPECIFICATION	HYO	10/9/01	JC	11/26/01	JC	11/26/01

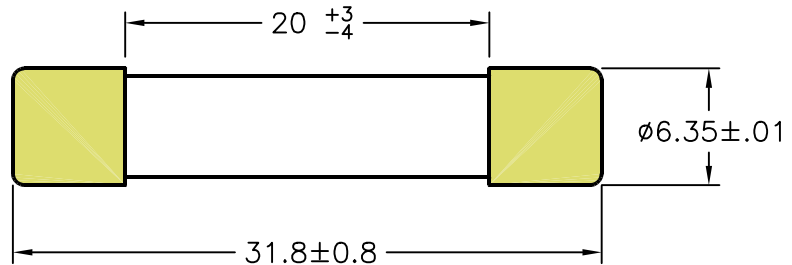

FEATURES:

1. Voltage Rating: 250 VAC
2. Glass Tube construction.
3. Standards: UL/CSA 248 part 14.

MULTICOMP TYPE NO.	RATED CURRENT - I _N (A)	VOLTAGE RATING (V)	NOMINAL RESISTANCE COLD (ohms)	NOMINAL MELTING - I ² T (A ² sec)	BREAKING CAPACITY
MCFO2G-125MA	0.125	250	22.3	0.152	10000 A @ 125 VAC 35 A @ 250 VAC
MCFO2G-300MA	0.300	250	3.11	0.730	
MCFO2G-400MA	0.400	250	1.86	1.35	
MCFO2G-500MA	0.500	250	1.25	2.55	
MCFO2G-800MA	0.800	250	0.550	8.00	
MCFO2G-1A	1	250	0.375	14.0	
MCFO2G-1.6A	1.6	250	0.170	49.6	10000 A @ 125 VAC 100 A @ 250 VAC
MCFO2G-2A	2	250	0.116	77.0	
MCFO2G-2.5A	2.5	250	0.0805	130.0	
MCFO2G-3A	3	250	0.0588	200.0	
MCFO2G-4A	4	250	0.0308	76.1	10000 A @ 125 VAC 200 A @ 250 VAC
MCFO2G-5A	5	250	0.0212	140.0	
MCFO2G-6.25A	6.25	250	0.0152	242.0	
MCFO2G-8A	8	250	0.0110	445.0	300 A @ 32 VAC
MCFO2G-10A	10*	32	0.00820	760.0	

*NOTE: Not CSA.


SPC-F004.DWG

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

multicomp

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:			
	DANIEL CAREY	8/17/98	3AG SLO - BLO [®] FUSES			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	JOHN COLE	10/16/98	A	TA-138	TA-138.DWG	B
	APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: MILLIMETERS	SHEET: 1 OF 2
	JEFF MCVICKER	10/26/98				

Average Time Current Curves

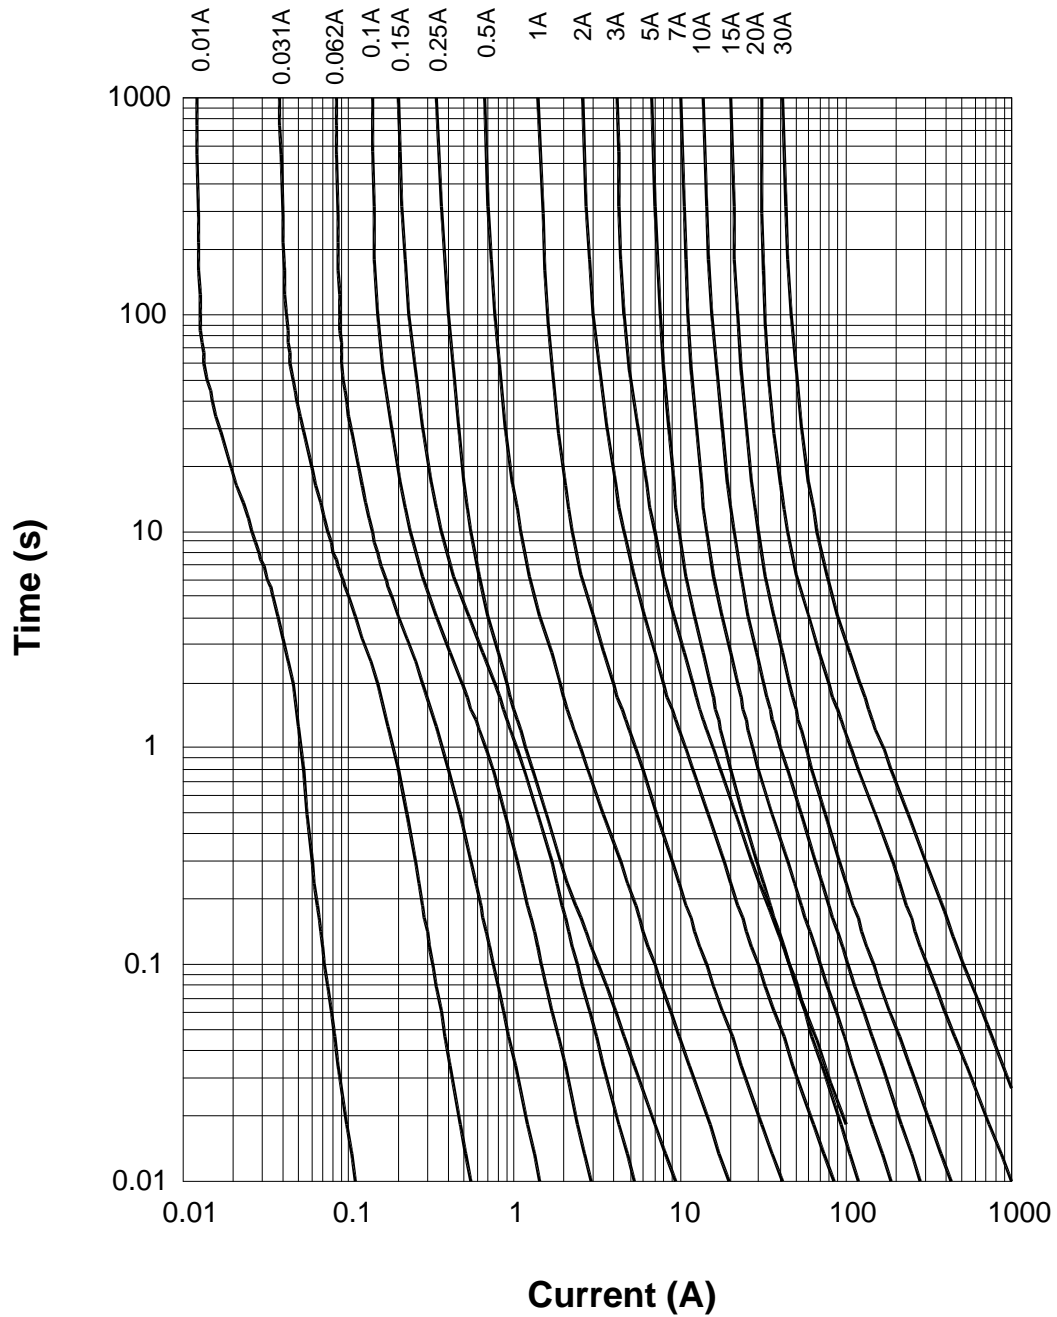

ELECTRICAL CHARACTERISTICS

% OF AMPERE RATING	OPENING TIME
110%	4 HOURS, MIN
135%	1 HOUR, MAX
200%	5 SECONDS, MIN

SIZE A	DWG. NO. TA-138	ELECTRONIC FILE TA-138.DWG	REV B
SCALE: NTS		U.O.M.: MILLIMETERS	SHEET: 2 OF 2