HR551L

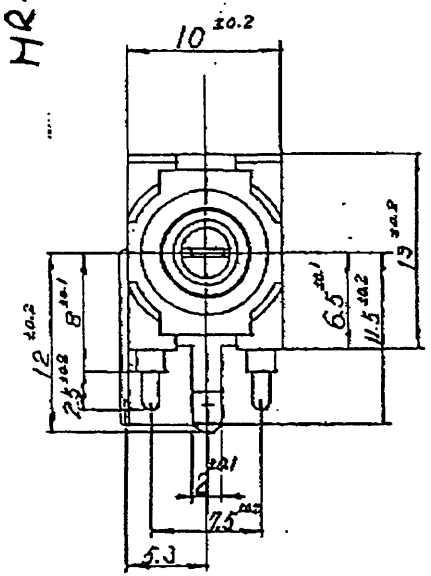

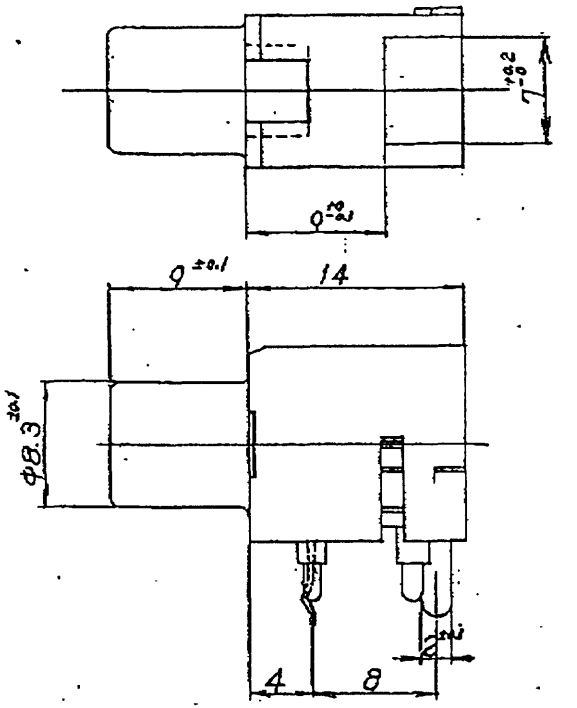

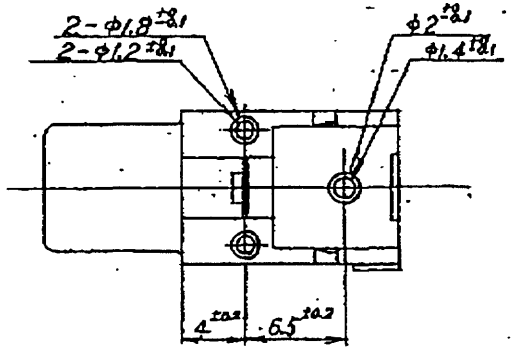

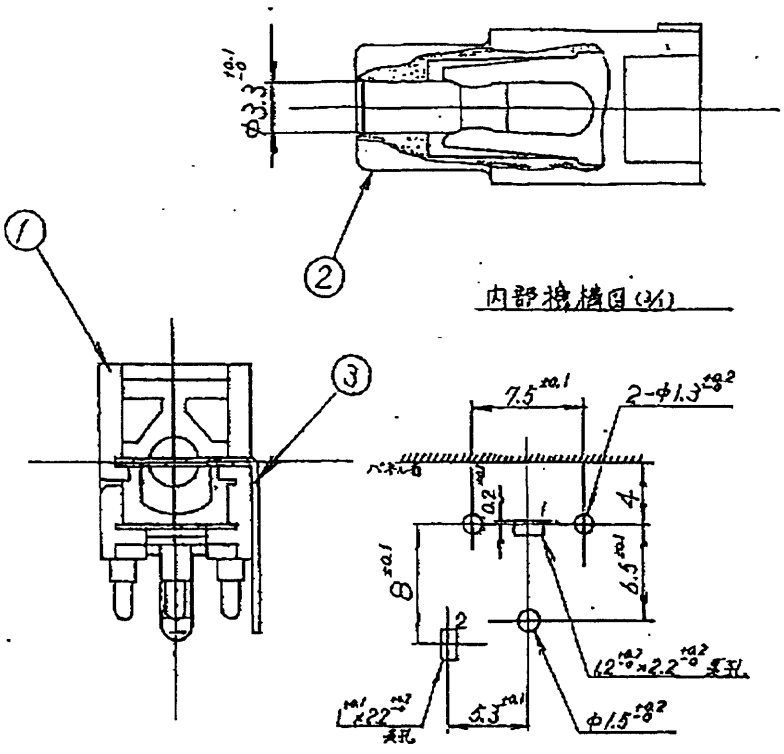

内部接続図(3/1)

MOUNTING HOLE (REFERENCE)



CIRCUIT DIAGRAM

SPECIFICATIONS:

1. Initial contact resistance
   - 50m ohm max.
2. Insulation resistance
   - 100M ohm min. @500V DC
3. Breakdown voltage
   - 500V AC for one minute

TOLERANCE ± 0.3mm

3	CONTACT B	1	BRASS	NI-PLATED
2	CONTACT A	1	BRASS	NI-PLATED
1	BODY	1	A.B.S. RESIN	
LET	PART NAME	QTE	MATERIAL	REMARK

DRAWN		SCALE	3/1	TITLE	MR551L
CKD		3RD ANGLE PROJ			
APPR		DATE	24 AUG 1982	DRAWN No.	

MARUSHIN ELECTRIC MFG. CO., LTD. マル信無線電機株式会社

SCHURTER

DURBAN ROAD
BOGNOR REGIS
WEST SUSSEX, PO22 9RL

REGISTERED OFFICE: AS ABOVE

152-396

SCHURTER LTD +01243810800 25/02 '00 09:16 NO.883 02/02