
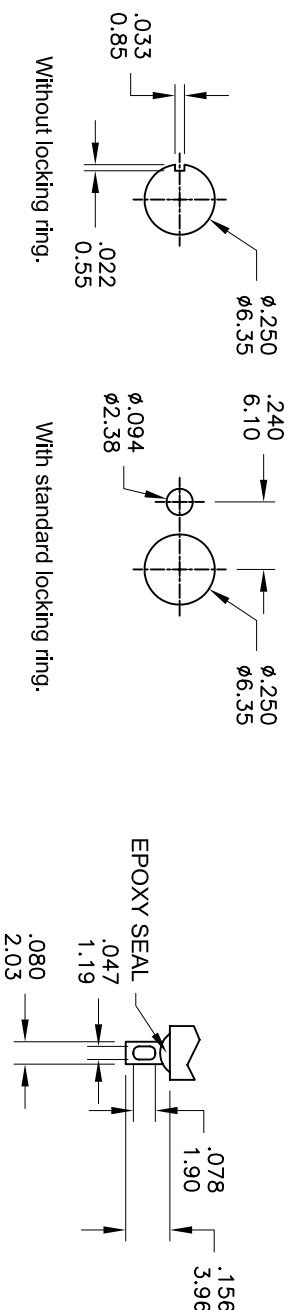


Model No.	POS.1	POS.2	POS.3
1M31	ON	NONE	ON
Term. Comm.	2-3,5-6,8-9		2-1,5-4,8-7
SCHEMATIC			
		OPEN	

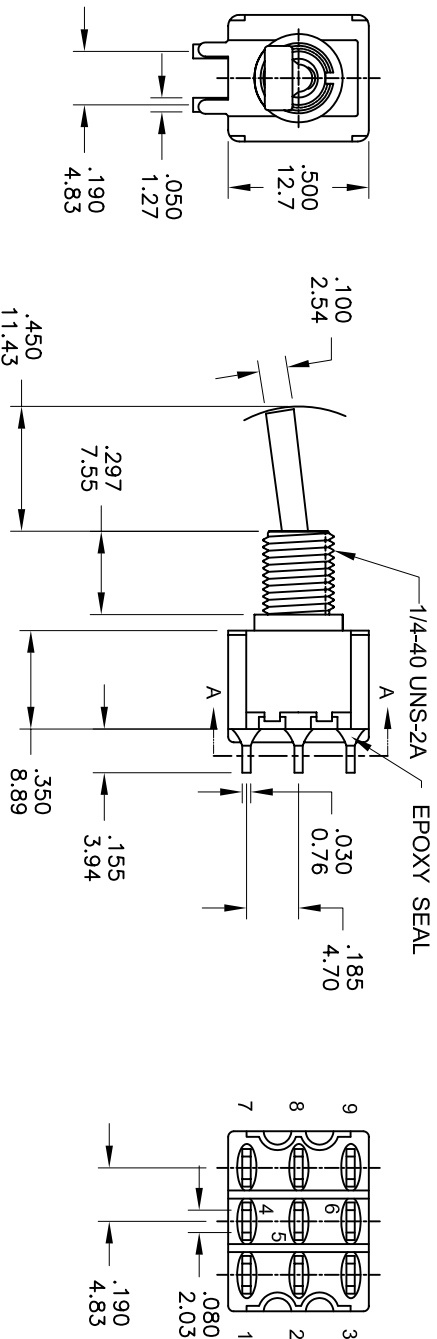

SPECIFICATIONS
ELECTRICAL LIFE: 40,000 make-and-break cycles at full load.
CONTACT RESISTANCE: 10m Ω max. initial @ 2-4VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000M Ω min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30 ° C to 85 ° C.

MATERIALS
CASE: Dially phthalate (DAP) (UL94v-0).
ACTUATOR: Brass,chrome plated.
BUSHING: Brass,nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT: Silver or gold plated.

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
 Q : 2Amps @250VAC
 5Amps @120 VAC or 28 VDC

符號	原尺寸	修改後尺寸	變更日期
1 (A)			
2 (B)			
3 (C)			
4 (D)			
5 (E)			

SCALE (比例) :	3 : 2
TOLERANCE (公差) :	0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 2.54 mm
FILE NAME :	1M3P0020

TITLE 圖名	Miniature Toggle Switches <th>SIZE 圖紙</th> <td>A4</td>			SIZE 圖紙	A4
DWG NO. 圖號	1M31T6B11M1QE			UNIT 單位	inch
REV. 版本	A <th>DATA 日期</th> <td>MAY - 26 - 2003 <th>SHEET 張數</th> <td>1 of 1</td> </td>	DATA 日期	MAY - 26 - 2003 <th>SHEET 張數</th> <td>1 of 1</td>	SHEET 張數	1 of 1
CHECKED BY 審核	JACK	DRAWN BY 製圖	BLUE		

德利威電子股份有限公司
DAILYWELL ELECTRONICS CO.,LTD.