


C-Series Single Pole Toggle Switches



The C-Series single pole compact high current toggle switches are ideal for applications with back panel size constraints. These switches feature self-cleaning contacts and ratings up to 20A 125VAC, 10A 250VAC, 1 1/2 HP 125-250VAC. With a rugged metal construction, these switches figure prominently in the Environmental Controls, Marine, Food Service, Vacuum Cleaner and various other general purpose markets with stringent current carrying requirements.

Dielectric Strength

UL/CSA: 1000V - live to dead metal parts and opposite polarity.

Electrical Life



25,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to +85°C)

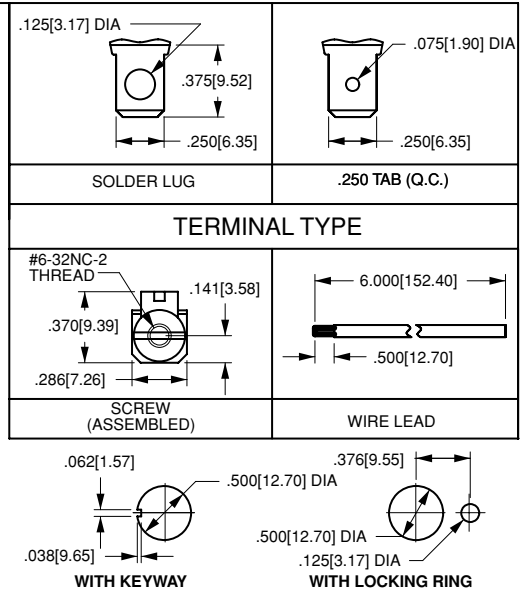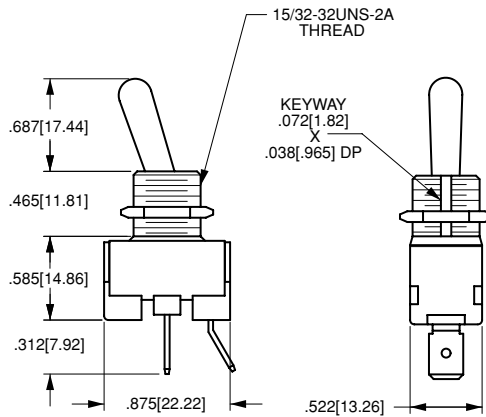

CA201 - 73

¹ Base Part Number

² Actuator Style

1 BASE PART NUMBER: SERIES/POLES/CIRCUITRY/RATING/TERMINATION

Single Pole
10A 250VAC, 20A 125VAC, 1 1/2 HP 125-250VAC

	<i>solder lug</i>	<i>.250 tab</i>	<i>screw term.</i>	<i>wire leads</i>
ON-NONE-OFF	CA200	CA201	CA204	CA205
ON-NONE-ON	CB200	CB201	CB204	CB205

2 ACTUATOR STYLE¹

<i>BAT</i>	<i>unsealed</i>	<i>sealed</i>	<i>toggle length</i>	<i>bushing length</i>
	73	78	0.687	0.465

NOTES
 1 Additional toggle styles available. Consult factory.