


Safety control modules
Series

AZR 031 AR for Emergency Stop applications

SCHMERSAL
Hard Copy no Pdf
418 6588 /

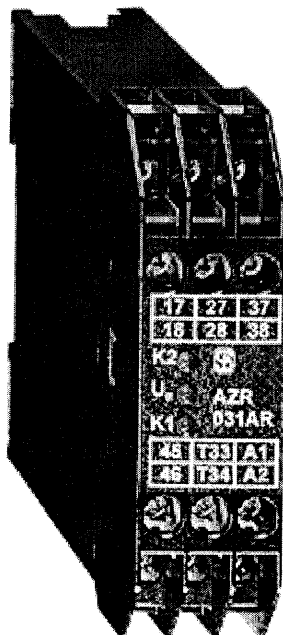

Technical data:

Standards:	IEC/EN 60204-1; EN 954-1; BG-GS-ET-20
Operating voltage U_e:	· 24 VDC \pm 15%
Operating current I_e:	· 0.1 A
Start conditions	Automatic or start button
Feedback circuit:	yes
Stop category	1
Control category:	3
Monitored inputs	1 NC or 2 NC
Enabling contacts:	3 enabling paths
Drop-out delay:	1.1 s
Contact load capacity:	max. 250 VAC, max. 6 A ($\cos \phi = 1$)
Signalling output:	1 NC contact
Termination:	screw terminals
Cable size:	max. 2,5 mm ² (incl. conductor ferrules)
Status indicators:	3 LED
Dimensions:	22.5 x 82 x 98.8 mm