


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

NOTES:

1. Color: silver-gray
2. UL Recognized (File E92997)
3. Heat treated for minimal fraying. Withstands temperature to 1200° F.
4. Easily Expanded for ease of installation.

PROPERTIES

1. Flexibility: Excellent
2. Solvent Resistance: N/A
3. Abrasion Resistance: N/A
4. Low Temperature Brittleness: NEMA VS-1, -75°C
5. Thermal Aging (*Continuous Operation*): NEMA VS-1, 250°C
6. Flammability: NEMA VS-1, non-combustible

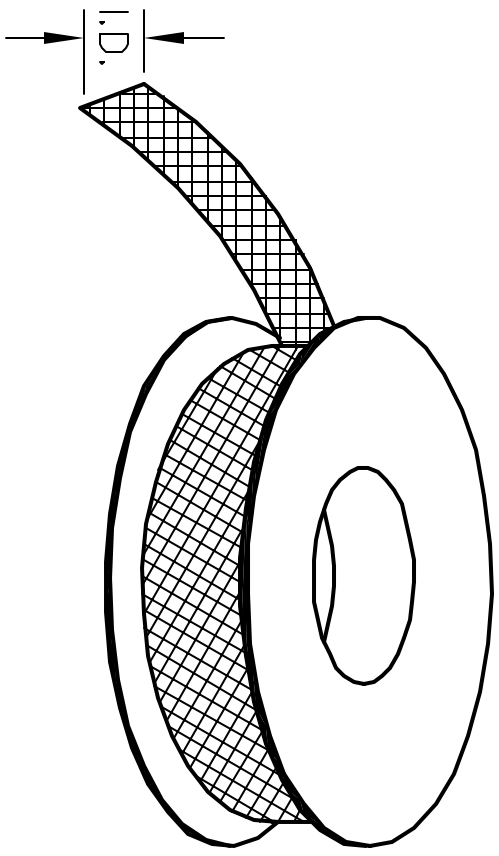

REVISIONS		DOC. NO.	SPC-F005	Effective:	12/21/98	Doc No.	890	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
810	A	RELEASED	HYO	12/21/99	JC	6/27/00	DJC	7/11/00

TYPE	SIZE	NOM. I.D. (INCHES)
SPC4913	24 AWG	0.022
SPC4914	22 AWG	0.027
SPC4915	20 AWG	0.034
SPC4916	18 AWG	0.042
SPC4917	16 AWG	0.053
SPC4918	14 AWG	0.066
SPC4919	12 AWG	0.085
SPC4920	10 AWG	0.106
SPC4921	8 AWG	0.133
SPC4922	6 AWG	0.166
SPC4923	4 AWG	0.208
SPC4924	2 AWG	0.263
SPC4925	0 AWG	0.330
SPC4926	3/8"	0.375
SPC4927	7/16"	0.438
SPC4928	1/2"	0.500
SPC4929	5/8"	0.625
SPC4930	3/4"	0.750
SPC4931	7/8"	0.875
SPC4932	1"	1.000



SPC TECHNOLOGY

DRAWING TITLE: **Heat Treated Fiberglass Sleaving**

DISCLAIMER
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
HISHAM ODISH	12/21/99
CHECKED BY:	DATE:
JOHN COLE	6/27/00
APPROVED BY:	DATE:
DANIEL CAREY	7/11/00

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-174	TA-174.DWG	A
SCALE:	NTS	U.O.M.: INCHES	SHEET: 1 OF 1