
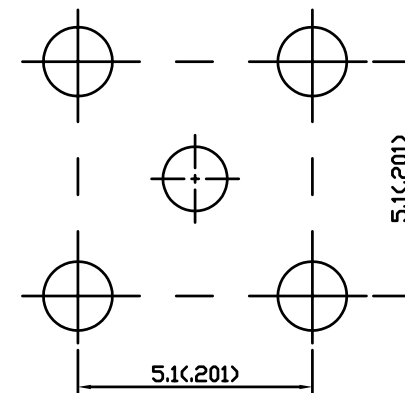
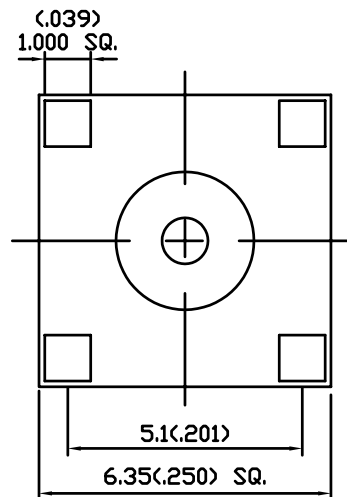


NO	DESCRIPTION	DATE
⚠	BACKGROUND FORMAT UPDATED	07.17.02'

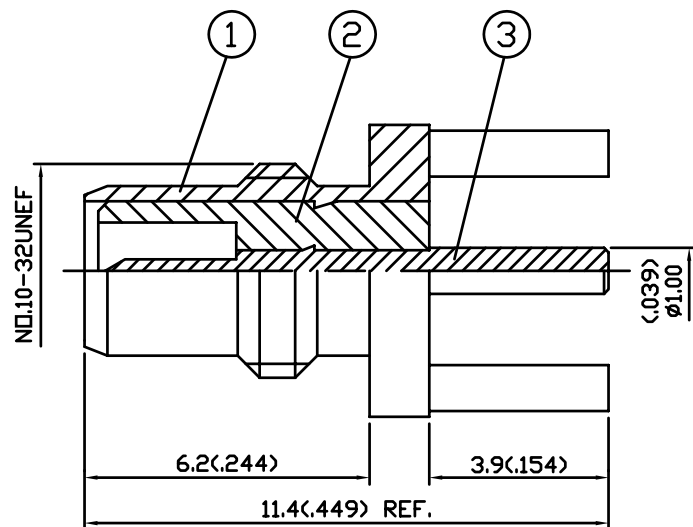

(4) $\phi 1.5(.059)$ MIN.
(1) $\phi 1.4(.055)$ MIN.

MOUNTING HOLE

NOTES: UNLESS OTHERWISE SPECIFIED

- BODIES: BRASS PER JIS-C3604
- CENTER CONTACT: BRASS PER JIS-C3604
- INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
- CONNECTOR INTERFACE PER MIL-STD-348A
- PART TO BE CLEAN AND FREE OF BURRS

3	CENTER CONTACT	BRASS	1	GOLD 30μ MIN.
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	GOLD 3μ MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

製圖	DRAWN	TOLERANCE	品名	26-09 (50Ω)	日期	DATE	版次	REV.
	袁金玉							
檢圖	CHECK	.XX ±0.1	單位	DWG.NO.	26-0004	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.		
	袁金華							
認定	APPROVAL	.XXX ±0.05	比例	SCALE	8:1			
	蘇文申							