

Type: **SL-350**


Performance Data **Size ½AA**
 (Typical values for batteries stored at 25°C for one year)

| | |
|-----------------------------------|----------------------|
| System | Li/SOCl ₂ |
| Nominal capacity | 1.0 Ah |
| Nominal voltage | 3.6 V |
| Nominal current | 0.6 mA |
| Max. continuous discharge current | 6 mA |
| Anode surface area | 6 cm ² |
| Weight | 9 g |
| Volume | 4.3 cm ³ |
| Temperature range | -55...+85 °C |


WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

See page 4 for further safety recommendations.



Typical Discharge Curves at +25°C

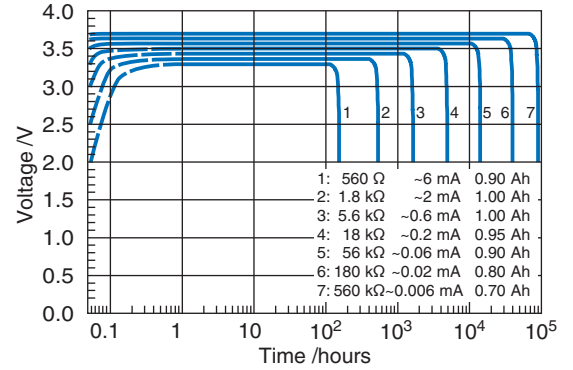

Available Capacity

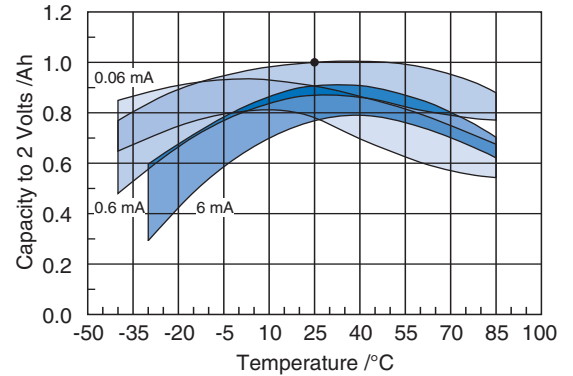

Operating Voltage

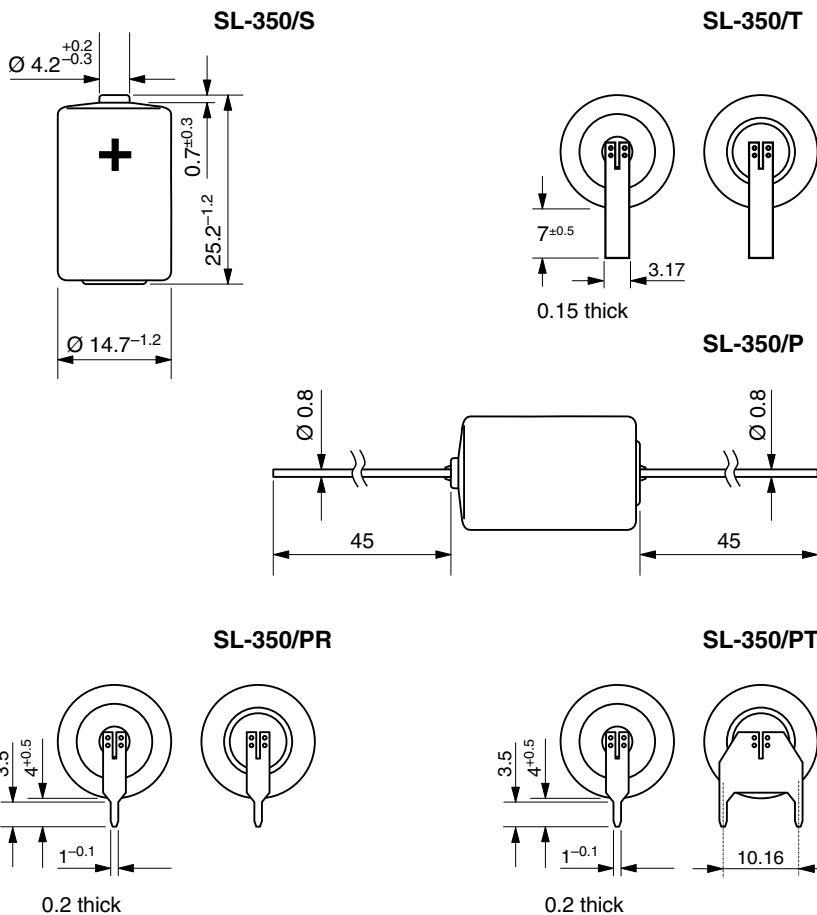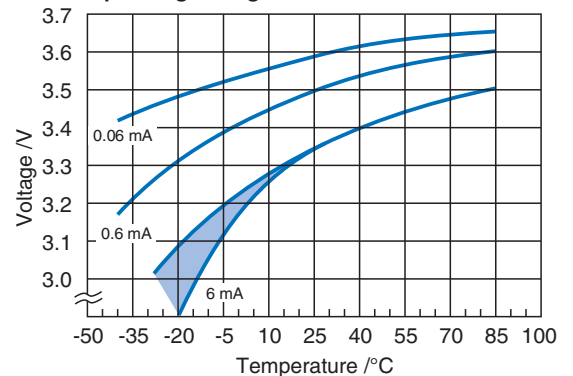

Available Terminations

| | |
|-----------|----------------|
| SL-350/S | Standard |
| SL-350/T | Tags |
| SL-350/P | Pins |
| SL-350/PR | Pins Radial |
| SL-350/PT | Polarized Tags |

Catalogue No.

| |
|---------------|
| 11 1 03501 00 |
| 11 1 03502 00 |
| 11 1 03503 00 |
| 11 1 03506 00 |
| 11 1 03508 00 |

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.