




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F008.DWG

REVISIONS

DOC. NO. SPC-F008 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1968	A	Released	JN	03/11/08	JN	03/11/08	JN	03/11/08

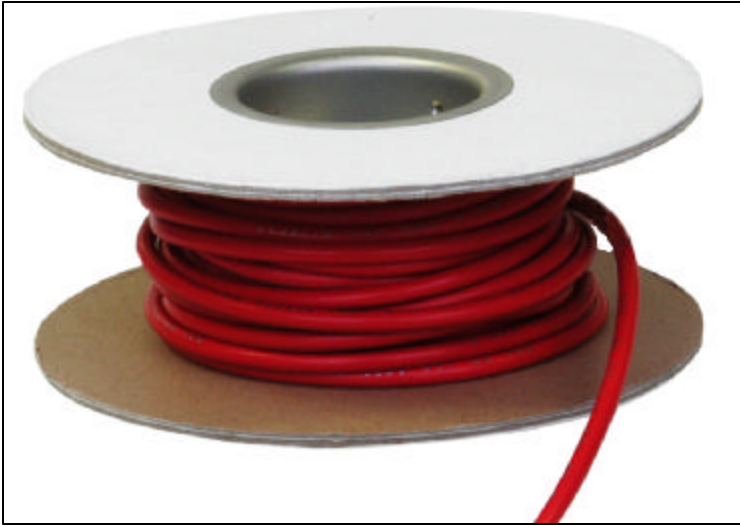

Gauge	Stranding	Color	Nom. Dia. of Stranded Conductor		Nom. Fin. Wire Diam.		Max. Resistance (dc at 20°C) Ohm/100' ft		100' Spool	ProPower Mfr P/N	500' Spool	ProPower Mfr P/N	1000' Spool	ProPower Mfr P/N
			Inch	mm	Inch	mm	1000-ft	K m						
28	7x36	White	0.0154	0.39	0.035	0.89	72.8	239	45M6633	PP1260	45M6687	PP1314	45M6742	PP1368
28	7x36	Green	0.0154	0.39	0.035	0.89	72.8	239	45M6634	PP1261	45M6688	PP1315	45M6743	PP1369
28	7x36	Black	0.0154	0.39	0.035	0.89	72.8	239	45M6635	PP1262	45M6689	PP1316	45M6744	PP1370
28	7x36	Red	0.0154	0.39	0.035	0.89	72.8	239	45M6636	PP1263	45M6690	PP1317	45M6745	PP1371
28	7x36	Yellow	0.0154	0.39	0.035	0.89	72.8	239	45M6637	PP1264	45M6691	PP1318	45M6746	PP1372
28	7x36	Blue	0.0154	0.39	0.035	0.89	72.8	239	45M6638	PP1265	45M6692	PP1319	45M6747	PP1373
28	7x36	Brown	0.0154	0.39	0.035	0.89	72.8	239	45M6639	PP1266	45M6693	PP1320	45M6748	PP1374
28	7x36	Orange	0.0154	0.39	0.035	0.89	72.8	239	45M6640	PP1267	45M6694	PP1321	45M6749	PP1375
28	7x36	Grey	0.0154	0.39	0.035	0.89	72.8	239	45M6641	PP1268	45M6695	PP1322	45M6750	PP1376
26	7x34	White	0.0197	0.5	0.394	1	45.8	150	45M6642	PP1269	45M6697	PP1323	45M6751	PP1377
26	7x34	Green	0.0197	0.5	0.394	1	45.8	150	45M6643	PP1270	45M6698	PP1324	45M6753	PP1378
26	7x34	Black	0.0197	0.5	0.394	1	45.8	150	45M6644	PP1271	45M6699	PP1325	45M6754	PP1379
26	7x34	Red	0.0197	0.5	0.394	1	45.8	150	45M6645	PP1272	45M6700	PP1326	45M6755	PP1380
26	7x34	Yellow	0.0197	0.5	0.394	1	45.8	150	45M6646	PP1273	45M6701	PP1327	45M6756	PP1381
26	7x34	Blue	0.0197	0.5	0.394	1	45.8	150	45M6647	PP1274	45M6702	PP1328	45M6757	PP1382
26	7x34	Brown	0.0197	0.5	0.394	1	45.8	150	45M6648	PP1275	45M6703	PP1329	45M6758	PP1383
26	7x34	Orange	0.0197	0.5	0.394	1	45.8	150	45M6649	PP1276	45M6704	PP1330	45M6759	PP1384
26	7x34	Grey	0.0197	0.5	0.394	1	45.8	150	45M6650	PP1277	45M6705	PP1331	45M6760	PP1385
24	7x32	White	0.024	0.61	0.0437	1.11	28.7	94.2	45M6651	PP1278	45M6706	PP1332	45M6761	PP1386
24	7x32	Green	0.024	0.61	0.0437	1.11	28.7	94.2	45M6652	PP1279	45M6707	PP1333	45M6762	PP1387
24	7x32	Black	0.024	0.61	0.0437	1.11	28.7	94.2	45M6653	PP1280	45M6708	PP1334	45M6763	PP1388
24	7x32	Red	0.024	0.61	0.0437	1.11	28.7	94.2	45M6654	PP1281	45M6709	PP1335	45M6764	PP1389
24	7x32	Yellow	0.024	0.61	0.0437	1.11	28.7	94.2	45M6655	PP1282	45M6710	PP1336	45M6765	PP1390
24	7x32	Blue	0.024	0.61	0.0437	1.11	28.7	94.2	45M6656	PP1283	45M6711	PP1337	45M6766	PP1391
24	7x32	Brown	0.024	0.61	0.0437	1.11	28.7	94.2	45M6657	PP1284	45M6712	PP1338	45M6767	PP1392
24	7x32	Orange	0.024	0.61	0.0437	1.11	28.7	94.2	45M6658	PP1285	45M6713	PP1339	45M6768	PP1393
24	7x32	Grey	0.024	0.61	0.0437	1.11	28.7	94.2	45M6659	PP1286	45M6714	PP1340	45M6769	PP1394
22	7x30	White	0.0299	0.76	0.0496	1.26	18.1	59.4	45M6660	PP1287	45M6715	PP1341	45M6770	PP1395
22	7x30	Green	0.0299	0.76	0.0496	1.26	18.1	59.4	45M6661	PP1288	45M6716	PP1342	45M6771	PP1396
22	7x30	Black	0.0299	0.76	0.0496	1.26	18.1	59.4	45M6662	PP1289	45M6717	PP1343	45M6772	PP1397
22	7x30	Red	0.0299	0.76	0.0496	1.26	18.1	59.4	45M6663	PP1290	45M6718	PP1344	45M6773	PP1398
22	7x30	Yellow	0.0299	0.76	0.0496	1.26	18.1	59.4	45M6664	PP1291	45M6719	PP1345	45M6774	PP1399
22	7x30	Blue	0.0299	0.76	0.0496	1.26	18.1	59.4	45M6665	PP1292	45M6720	PP1346	45M6775	PP1400
22	7x30	Brown	0.0299	0.76	0.0496	1.26	18.1	59.4	45M6666	PP1293	45M6721	PP1347	45M6776	PP1401
22	7x30	Orange	0.0299	0.76	0.0496	1.26	18.1	59.4	45M6667	PP1294	45M6722	PP1348	45M6777	PP1402
22	7x30	Grey	0.0299	0.76	0.0496	1.26	18.1	59.4	45M6668	PP1295	45M6723	PP1349	45M6778	PP1403
20	7x29	White	0.0374	0.95	0.0571	1.45	11.2	36.7	45M6669	PP1296	45M6724	PP1350	45M6779	PP1404
20	7x29	Green	0.0374	0.95	0.0571	1.45	11.2	36.7	45M6670	PP1297	45M6725	PP1351	45M6780	PP1405
20	7x29	Black	0.0374	0.95	0.0571	1.45	11.2	36.7	45M6671	PP1298	45M6726	PP1352	45M6781	PP1406
20	7x29	Red	0.0374	0.95	0.0571	1.45	11.2	36.7	45M6672	PP1299	45M6727	PP1353	45M6782	PP1407
20	7x29	Yellow	0.0374	0.95	0.0571	1.45	11.2	36.7	45M6673	PP1300	45M6728	PP1354	45M6783	PP1408
20	7x29	Blue	0.0374	0.95	0.0571	1.45	11.2	36.7	45M6674	PP1301	45M6729	PP1355	45M6784	PP1409
20	7x29	Brown	0.0374	0.95	0.0571	1.45	11.2	36.7	45M6675	PP1302	45M6730	PP1356	45M6785	PP1410
20	7x29	Orange	0.0374	0.95	0.0571	1.45	11.2	36.7	45M6676	PP1303	45M6731	PP1357	45M6786	PP1411
20	7x29	Grey	0.0374	0.95	0.0571	1.45	11.2	36.7	45M6677	PP1304	45M6732	PP1358	45M6787	PP1412
18	16x30	White	0.0465	1.18	0.0661	1.68	7.06	23.2	45M6678	PP1305	45M6733	PP1359	45M6788	PP1413
18	16x30	Green	0.0465	1.18	0.0661	1.68	7.06	23.2	45M6679	PP1306	45M6734	PP1360	45M6789	PP1414
18	16x30	Black	0.0465	1.18	0.0661	1.68	7.06	23.2	45M6680	PP1307	45M6735	PP1361	45M6790	PP1415
18	16x30	Red	0.0465	1.18	0.0661	1.68	7.06	23.2	45M6681	PP1308	45M6736	PP1362	45M6791	PP1416
18	16x30	Yellow	0.0465	1.18	0.0661	1.68	7.06	23.2	45M6682	PP1309	45M6737	PP1363	45M6792	PP1417
18	16x30	Blue	0.0465	1.18	0.0661	1.68	7.06	23.2	45M6683	PP1310	45M6738	PP1364	45M6793	PP1418
18	16x30	Brown	0.0465	1.18	0.0661	1.68	7.06	23.2	45M6684	PP1311	45M6739	PP1365	45M6794	PP1419
18	16x30	Orange	0.0465	1.18	0.0661	1.68	7.06	23.2	45M6685	PP1312	45M6740	PP1366	45M6795	PP1420
18	16x30	Grey	0.0465	1.18	0.0661	1.68	7.06	23.2	45M6686	PP1313	45M6741	PP1367	45M6796	PP1421

Note

- Conductor Material: Bare Copper
- Operating temperature: 80°C
- Rated Voltage 300 V (Spark voltage 3000V)
- Flame resistance VW-1 and FT1
- RoHS Compliant

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jason Nash	03/11/08
CHECKED BY:	DATE:
Jason Nash	03/11/08
APPROVED BY:	DATE:
Jason Nash	03/11/08

DRAWING TITLE: UL Style 1061, Semi-Rigid PVC Insulated Hook-up Wire			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
	TA-835	TA-835.DWG	
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1	