


**Vectorbord® Universal Uncommitted Metric Extender Cards (DIN)**

Vector uncommitted test extenders are for either 160mm or 220mm depths, 4HP wide installation. They are strictly point-to-point with trace shielding. Available for:

- **64-pin DIN, 2 connector rows, A, B**
- **96-pin DIN, 3 connector rows, A, B, C**
- **160-pin DIN, 5 connector rows, Z, A, B, C, D**

Jumpers are provided for interrupting signal lines. Mounting pads for additional DIN connectors or testpoint for attachment of test specimens on either side.


**UEB220-3U or UEB220-6U, for 96-pin to 96-pin, 2 row DIN 41612**

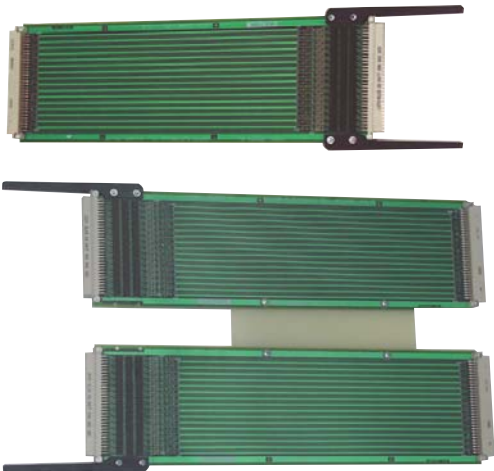

Universal Uncommitted  
UEB220-3U or UEB220-6U 96-Pin DIN, for 220mm cards  
Also: UEB400-3U; UEB400-6U; UEB400-9U  
UEB500-3U; UEB500-6U; UEB500-9U

Length: 11.75" (298mm)  
Material: FR4 Epoxy Glass  
Layers: 4-layer  
Voltages: +5, Aux A & Aux B, GND  
Legends: Included  
Jumpers: Included (for signal line interrupt)  
Layer Design: 3-layer; trace shielding for each signal line

**UEC220-3U or UEC220-6U, for 64-pin to 64-pin, 2 row DIN 41612**

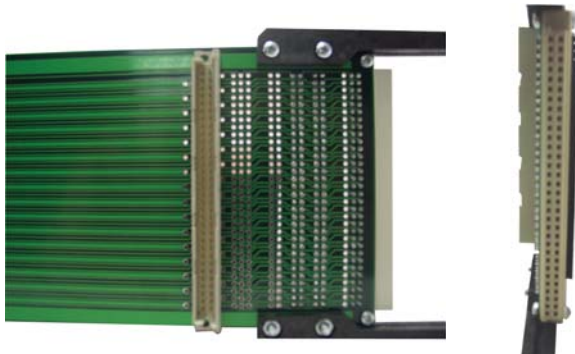

Length: 11.75" (298mm)  
Height: 3U, 3.94" (100mm) or 6U (233.35mm)  
Voltages: +5, Aux A & Aux B, GND  
Layer Design: 3-layer; trace shielding for each signal line

**UEX220-3U or UEX220-6U, for 160-pin to 160-pin, 5 row DIN 41612**



Length: 11.75" (298mm)  
Height: 3U, 3.94" (100mm) or 6U (233.35mm)  
Voltages: +5, Aux A & Aux B, GND  
Layer Design: 8-layer; trace shielding for each signal line

Extenders