



TABLE 1. DIMENSIONS OF CRINKLE WASHERS

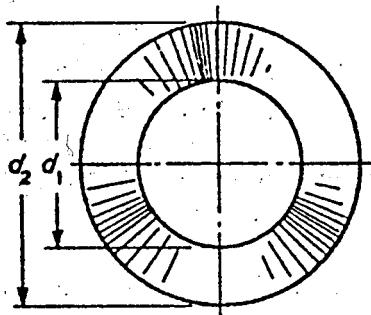

3 equi-spaced radial corrugations,
radii of upper and lower
corrugations to be equal.

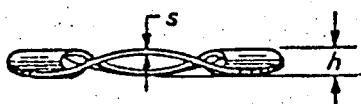

Dimensions in millimetres

1	Nominal size and thread diameter d	Inside diameter d_1		Outside diameter d_2		Height h		Thickness s nominal*
		max.	min.	max.	min.	max.	min.	
M1.6	1.8	1.7		3.7	3.52	0.51	0.36	0.16
M2	2.3	2.2		4.6	4.42	0.53	0.38	0.16
(M2.2)	2.5	2.4		5.2	5.02	0.53	0.38	0.16
M2.5	2.8	2.7		5.8	5.62	0.53	0.38	0.16
M3	3.32	3.2		6.4	6.18	0.61	0.46	0.16
(M3.5)	3.82	3.7		6.9	6.68	0.79	0.63	0.20
M4	4.42	4.3		8.1	7.88	0.84	0.69	0.28
M5	5.42	5.3		9.2	8.98	0.89	0.74	0.30
M6	6.55	6.4		11.5	11.23	1.14	0.99	0.40
M8	8.55	8.4		15.0	14.73	1.40	1.25	0.40
M10	10.68	10.5		19.6	19.27	1.70	1.55	0.55
M12	13.18	13.0		22.0	21.67	1.90	1.65	0.55
(M14)	15.18	15.0		25.5	25.17	2.06	1.80	0.55
M16	17.18	17.0		27.8	27.47	2.41	2.16	0.70
(M18)	19.21	19.0		31.3	30.91	2.41	2.16	0.70
M20	21.21	21.0		34.7	34.31	2.66	2.16	0.70

NOTE. Sizes shown in brackets are non-preferred, and are not usually stock sizes.

* Tolerances to be in accordance with those specified for the thickness of material in Table 2 of BS 2870, 'Rolled copper and copper alloys. Sheet, strip and foil', or Table 4 of BS 1449.

'Steel plate, sheet and strip'. Part 4, 'Stainless and heat resisting plate, sheet and strip', as appropriate.