

MicroStrobe

- Simple to install
- High intensity Xenon flash
- Compact one-piece housing
- Push-in rapid connection
- Standard 22mm hole pattern
- Fully weatherproof to IP65 (front)
- Minimum 5 million flashes
- 5 lens colours

Xenon Flashing Panel Mount Indicators




MiniStrobe

- 12 or 24 volts
- Intense Xenon flash
- Fully weatherproof to IP67
- 5 lens colours

Applications Include:

- Security
- Industrial
- Door Entry Controls
- Warden Controlled Monitors
- Alarm Panels

Integrated Xenon Beacons

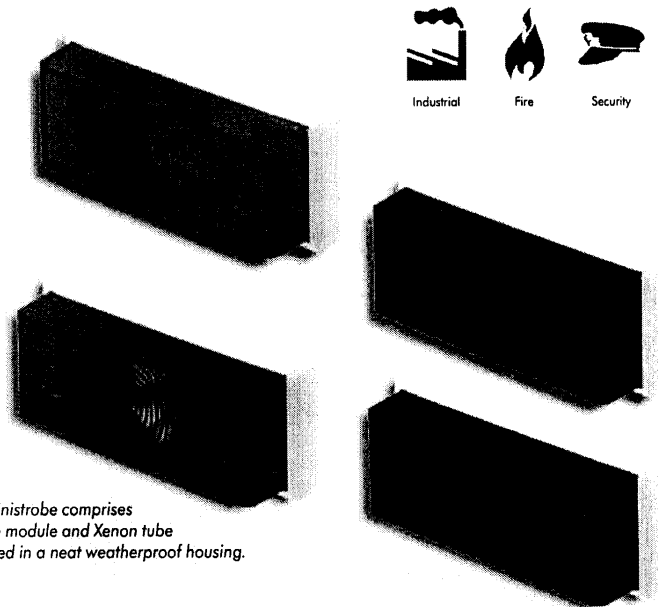

The MiniStrobe comprises a drive module and Xenon tube mounted in a neat weatherproof housing.

Both the MicroStrobe and the MiniStrobe are compact and reliable Xenon flashing devices to be integrated in a wide range of OEM applications. They offer an effective and attractive solution when quality and reliability cannot be compromised.

MicroStrobe Xenon Flashing Panel Mount Indicators

technical specification

| MODEL | VOLTAGE RANGE | POWER OUTPUT | CURRENT CONSUMPTION (mA) | | | | FLASH RATE NOMINAL | WEIGHT (Gms) |
|---------------|-----------------------|--------------|--------------------------|------|------|-------|--------------------|--------------|
| | | | @10v | @12v | @24v | @100v | | |
| XP2XMV/1 | 10-100Vdc 20-72Vac | 1W | 70 | 72 | 56 | 22 | 120/min | 53 |
| XP2X110-130/1 | 110-130Vac | 1W | - | - | - | - | 120/min | 53 |
| XP2X230/1 | 230Vac | 1W | - | - | - | - | 120/min | 53 |

Strobe unit weatherproof to IP65 when installed. Operating temperatures: -20°C to +50°C.

High Voltage transient and polarity reversal protection fitted.

CE complies with EMC directive 89/336/EEC and Low Voltage Directive 73/23/EEC, where appropriate.

dimensions

114mm x 44mm x 30mm overall
depth behind panel 89mm

12 months guarantee 

materials and lens colours

Polycarbonate Lens





MiniStrobe Integrated Xenon Beacons

technical specification

The MiniStrobe comprises 2 assemblies - a drive module and a Xenon lamp unit. The drive module is available in either 12V or 24V.

| MODEL | VOLTAGE | POWER OUTPUT | CURRENT CONSUMPTION (mA) | FLASH RATE NOMINAL | WEIGHT (Gms) |
|----------|---------|--------------|--------------------------|--------------------|--------------|
| MS1X12/1 | 12V | 1W | 115 | 60/min | 65 |
| MS1X24/1 | 24V | 1W | 55 | 60/min | 65 |

12V 0.5W version available to special order. Strobe unit weatherproof to IP67 when installed. Operating temperatures: -20°C to +50°C.



dimensions

Drive Module: 62mm x 33mm x 22mm

Lamp Unit: 79mm x 31mm x 21mm

materials and lens colours

High Impact Acrylic Lens. Synthetic Rubber Base



12 months guarantee

 **delta design**
a division of NICOTECH Limited



BS EN ISO 9001
Certificate No. 2272

Primrose Hill, Kings Langley,
Herts WD4 8HD, England.

Tel: (U.K.) 01923 269522
(Int.) +44 1923 269522

Fax: (U.K.) 01923 260167
(Int.) +44 1923 260167

E-mail: sales@deltadesign.co.uk
Web: <http://www.deltadesign.co.uk>

Your Delta Design distributor:

All specifications are nominal and subject to change without notice.