
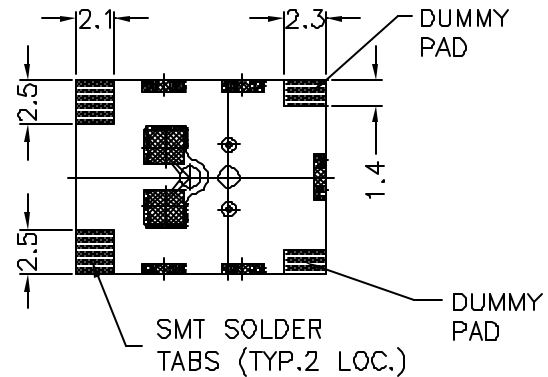
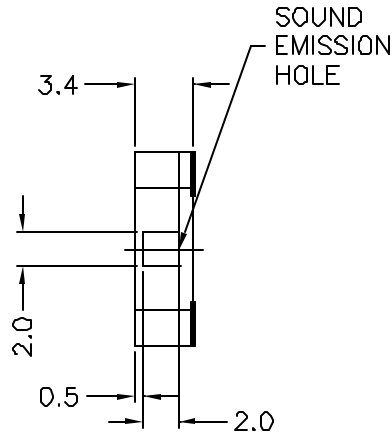


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC IS PROHIBITED.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
Rated Voltage	5	Vp-p
Operating Voltage Range	3-7	Vp-p
Rated Current (Max)	80	mA
DC Coil Resistance	30±4.5	Ohm
Minimum Sound Pressure Level @ 10cm	85	dBA
Resonant Frequency	2700	Hz
Operating Temperature Range	-30 ~ +60	°C
Storage Temperature Range	-40 ~ +85	°C
Housing Material	LCP	
Terminal	Sn-Pb Plated Phosphor Bronze	

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	6/9/99	
A	ADDED ELECTRICAL SPECIFICATION	3/10/03	S. J.
B	REDREW ENTIRE DRAWING	4/25/03	
	ADDED HOUSING & TERMINA		S. J.

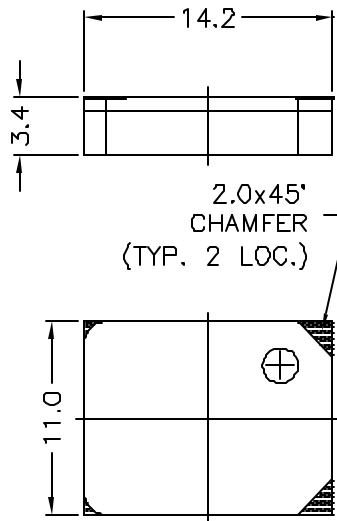

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS.
- SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± 0.2 ± XXX ±		 Dayton, Ohio	
APPROVALS		DATE	
DRAWN TMM		6/99	
CHECKED			
APPROVED S. J.		6/99	
DO NOT SCALE DRAWING		SIZE A	MATERIAL
		DRAWING NO. SMT-05	
		SCALE N/A	MAX. WT.
		SHEET 1 OF 1	

FILE NAME
SMT-05.DWG