

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPECIFICATIONS:

RATINGS:

1. VOLTAGE: 250V
2. CURRENT: 15A


MATERIALS:

1. INSULATING MATERIAL: PA
2. FLAMMABILITY CLASS: UL94V-0
3. TEMPERATURE RANGE: -30 °C to +105 °C
4. TERMINAL BLOCK: CuSn
5. COLOR: GREEN

SPC TYPE NO.	NO. OF POLES
1836	2
1837	3
1838	4
1839	5
1840	6
1841	8
1842	10
1843	12
1844	16
1845	20

REVISIONS			DOC. NO. SPC-FD05 * Effective 12/21/88 * DCP No. 480					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKED	DATE	APPRVD	DATE
154	A	RELEASED	HYO	3/9/00	JC	4/5/00	DJC	4/28/00

P = POLES

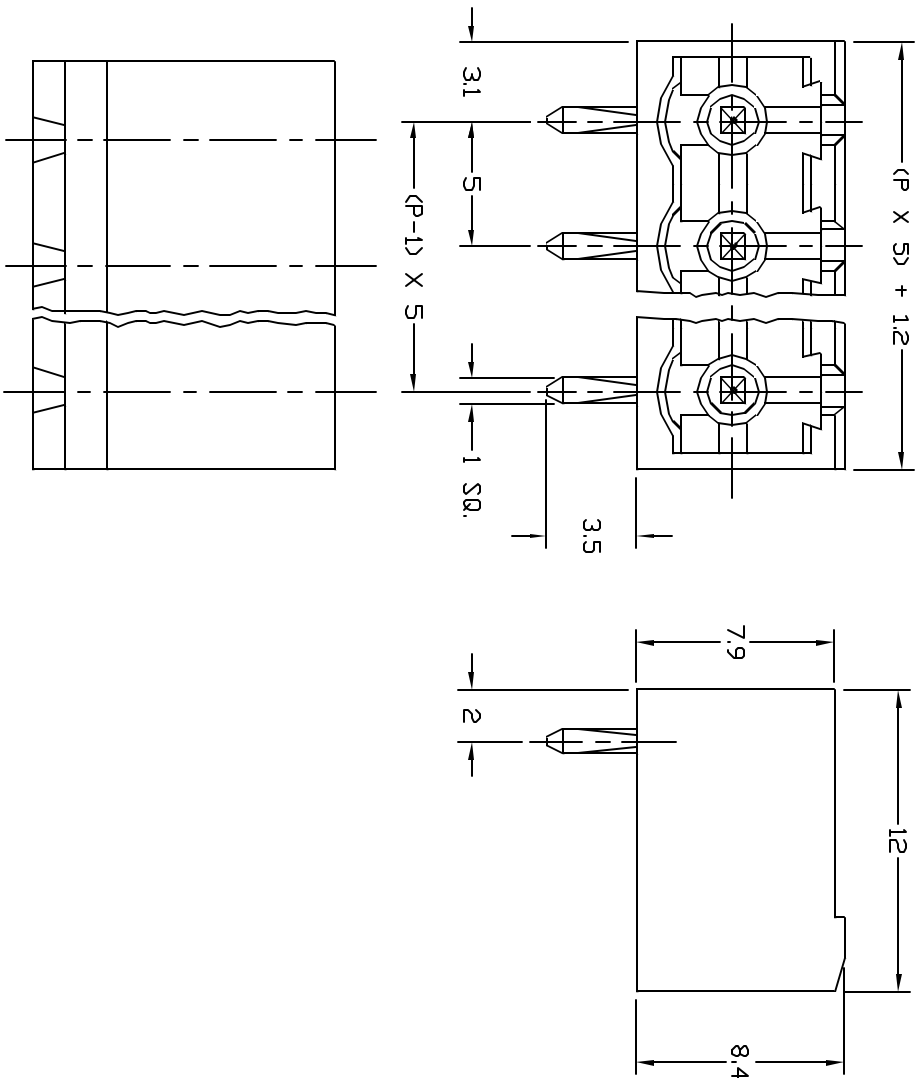

DISCLAIMER
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
HISHAM ODISH	3/9/00
CHECKED BY:	DATE:
JOHN COLE	4/5/00
APPROVED BY:	DATE:
DANIEL CAREY	4/28/00



SPC TECHNOLOGY

DRAWING TITLE:

HORIZONTAL HEADER, 5mm SPACING, CLOSED END

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-224	TA-224.DWG	A
SCALE:	NTS	U.O.M.: MILLIMETERS	SHEET: 1 OF 1