

PARTS NAME	MATERIAL	UL FLAME GRADE
1 Sensing cup	Aluminum	
2 Actuating pin	Ceramic	
3 Bi-metal disc	Nickel	
4 Retainer	Phenolic or pps	94V-0
5 Stationary arm	Brass tin pltd	
6 Solder	Tin	
7 Glue	Epoxy	
8 Terminal	Brass or steel tin pltd	
9 Movable arm	Beryllium copper	
10 Terminal-A	Brass tin pltd	
11 Case	Phenolic or pps	94V-0
12 Contact-R	Silver alloy	
13 Contact-F	Silver alloy	
14 Bracket	Steel	

SPECIFICATIONS


- * NORMALLY OPEN TYPE
- * OPEN : 35 ± 4 °C
- * CLOSE: 50 ± 3. °C
- * TERMINAL SIZE .250" QUICK CONNECT
- * AGENCY APPROVALS: UL CUL VDE SEMKO DEMKO FIMKO NEMKO
- * 15A 125VAC 10A 250VAC(Resistive).
- * LIFE 100K CYCLES



contact type
(N.O.)



Differential

INCH
MM

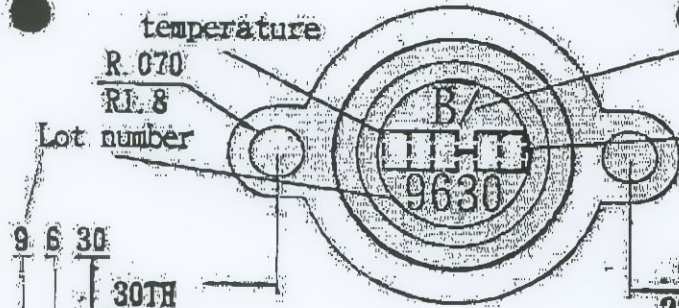

9 6 30
30TH LOTS
8-AUG.
9-SEPT.
0-OCT.
N-NOV.
D-DEC.

1999

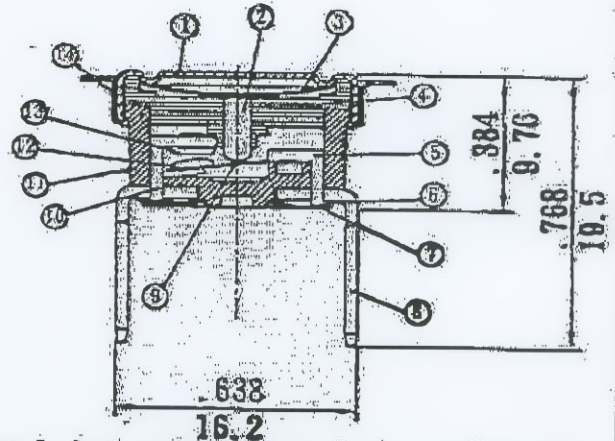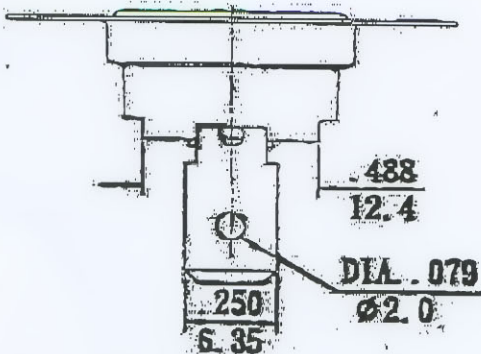

The size remains unchanged, but other technical modification will be made without notice.

SCALE 2:1 (mm)

REV	DESCRIPTION	DFTG.	DATE	TITLE
△				3B-SR2
△				MODEL T23B050ASR2-15
△				MATERIAL NO.
△	Original CLOSE. REVISE TO OPEN			MATERIAL
REV	DESCRIPTION	DFTG.	DATE	DRAWING NO. 230611
DFTG.	Kevin	Kim		APPR.

Handwritten signature and number 3325