


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-FD05 * Effective 12/21/98 * DCP No. 480					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKED	DATE	APPRVD	DATE
154	A	RELEASED	DJC	6/22/99	JC	6/24/99	JWM	6/29/99
906	B	RENAME DRAWING TITLE	HYD	3/6/00	JC	3/6/00	JC	3/6/00

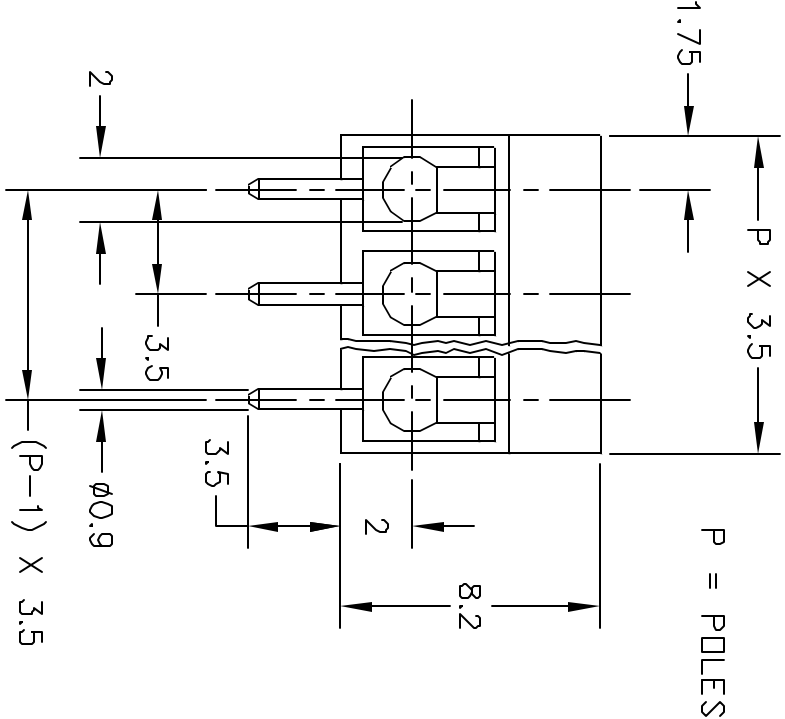

SPC Type #	Poles
1904	2
1905	3
1906	4
1907	5
1908	6
1909	7
1910	8
1911	9
1912	10
1913	12
1914	14
1915	16

RATINGS

VOLTAGE: 125V
CURRENT: 6A
WIRE SIZE: 28-16 AWG
SCREW SIZE: M2

MATERIALS

INSULATING MATERIAL: PA
FLAMMABILITY CLASS: UL94V-0
TEMPERATURE RANGE: -30° TO +105°
TERMINAL BLOCK: CuZn
WIRE GUARD: CuSn
COLOR: Dark Grey



DISCLAIMER
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED,

DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
DANIEL CAREY	6/22/99
CHECKED BY:	DATE:
JOHN COLE	6/24/99
APPROVED BY:	DATE:
JEFF MCVICKER	6/29/99

DRAWING TITLE:			
VERTICAL, 6A, 3.50mm SPACING, WIRE GUARD, TERMINAL BLOCKS			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-151	TA-151.DWG	B
SCALE:	NTS	U.O.M.: MILLIMETERS	SHEET: 1 OF 1