







ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
809	A	RELEASED	JWM	9/9/02	HO	9/9/02	DJC	9/9/02

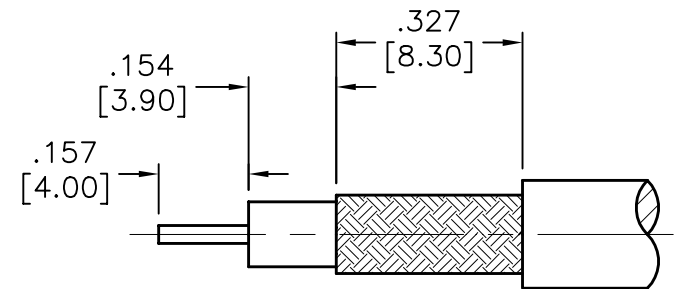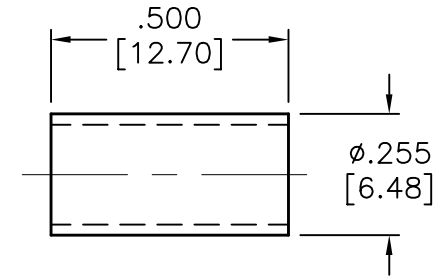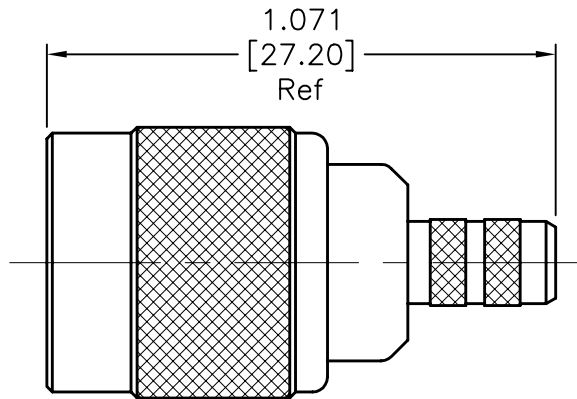

#	DESCRIPTION	QTY	MATRL	FINISH
1	COUPLING NUT	1	BRASS	NICKEL
2	BODY	1	BRASS	NICKEL
3	INSULATOR	1	PTFE	---
4	FERRULE STUD	1	BRASS	NICKEL
5	GASKET	1	RUBBER	---
6	RETAINING RING	1	BRASS	NICKEL
7	BUSHING	1	DELTRIN	---
8	WASHER	1	BRASS	NICKEL
9	CONTACT	1	PHOS. B.	GOLD
10	FERRULE	1	COPPER	NICKEL

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-4 GHz
 VOLTAGE RANGE: 500 VOLTS PEAK
 INSERTION LOSS: .06 dB Max. X fGHz
 TEMPERATURE RANGE: -65°C TO 165°C
 VSWR: 1.3 MAX. 0-4 GHz

RECOMMENDED
CABLE STRIPPING DIM'S

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. HEX CRIMP SIZE
FOR CENTER CONTACT .068"

FOR RG-58, 58A, 58C, 141, 141A, BELDON 8219, 8240, 8259, 8262, 9201
 9203, 9310, 9311; CommScope BWC-195, BWC-195R, 0268; Times LMR-195

DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	9/9/02
CHECKED BY:	DATE:
Hisham Odish	9/9/02
APPROVED BY:	DATE:
Daniel Carey	9/9/02

DRAWING TITLE: TNC Plug, Reverse Polarity, Crimp			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	SPC10036	18C1909.dwg	A
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1	