

# Bead Cores

[RoHS Compliant]




Model	Dimensions (mm)			Frequency range		Remarks
	OD	ID	H	up to 100MHz (mainly AM band range)	up to 300MHz (mainly FM band range)	
<b>B-20F-28</b>	2.8	1.3	3.0	●		
<b>B-20F-38</b>	3.8	1.5	4.3	●		
<b>B-20F-46</b>	4.6	1.5	4.3	●		
<b>B-20F-57</b>	5.7	1.5	8.0	●		
<b>B-20L-25</b>	2.5	1.0	1.2		●	
<b>B-20L-34</b>	3.4	0.8	4.4		●	
<b>B-20L-44</b>	4.4	1.6	7.0		●	
<b>B-20L-48B</b>	4.8	2.4	4.8		●	
<b>B-20L-95B</b>	9.7	4.8	4.2		●	(Insulation coated)



※Above frequency range is a reference only. Please test with actual device before use.

## Shape and Dimensions

●Beads Cores




## Impedance vs. Frequency

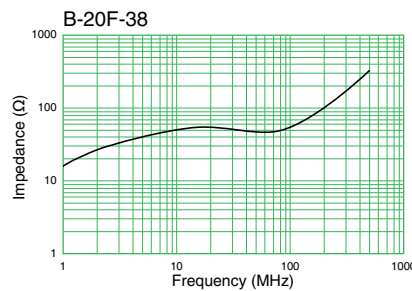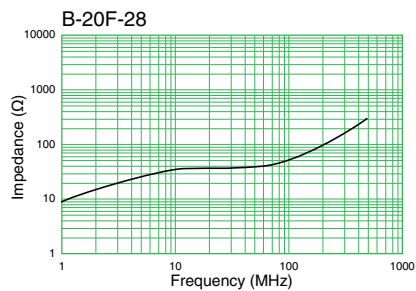

EMI Core VOL.07



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

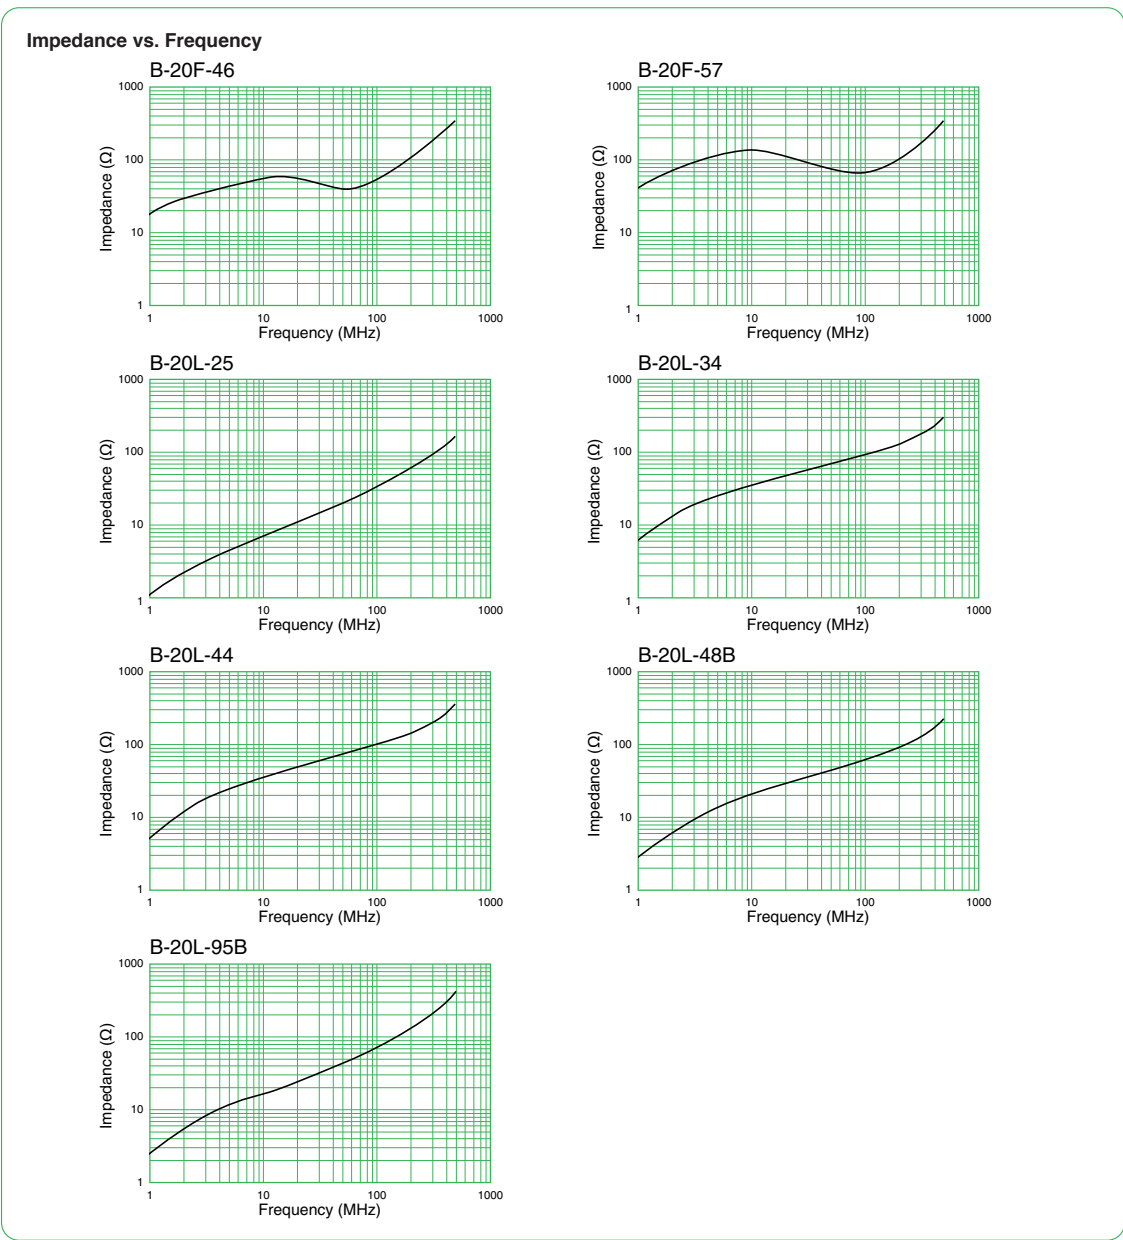

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.