


internal toothed lock washers

type 12

for Imperial fasteners

Dimensions in inches

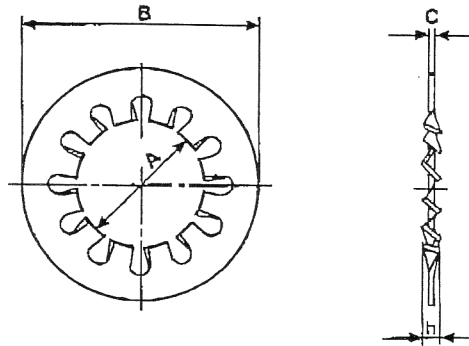

$h = 2c$ minimum

For screw sizes	A		B		C nominal thickness	Washer ref. Number
	maximum	minimum	maximum	minimum		
8 BA M2 No.2	0.095	0.089	0.185	0.175	0.010	1202
7 BA No.3	0.109	0.102	0.225	0.215	0.016	1203
6 BA No.4	0.120	0.113	0.255	0.245	0.016	1204
5 BA No.5	0.135	0.128	0.245	0.235	0.016	1205
4 BA No.6	0.153	0.145	0.305	0.295	0.018	1206
4 BA No.6	0.153	0.145	0.285	0.275	0.018	1206-00
3 BA No.8	0.174	0.166	0.346	0.335	0.018	1208
2 BA No.10	0.204	0.195	0.406	0.395	0.021	1210
2 BA No.10	0.204	0.195	0.383	0.373	0.021	1210-00
1 BA $\frac{7}{16}$ " No.12	0.230	0.220	0.406	0.395	0.021	1212
0 BA	0.247	0.237	0.406	0.395	0.021	1212A
$\frac{1}{8}$ "	0.267	0.256	0.478	0.466	0.024	1214
$\frac{1}{4}$ "	0.262	0.252	0.406	0.395	0.021	1214-5
$\frac{5}{16}$ " M7	0.296	0.286	0.478	0.466	0.024	1216
$\frac{3}{8}$ "	0.332	0.320	0.607	0.594	0.030	1218
$\frac{3}{8}$ "	0.396	0.382	0.695	0.680	0.035	1220
$\frac{3}{8}$ "	0.425	0.410	0.615	0.595	0.021	1220-08
$\frac{7}{16}$ "	0.461	0.446	0.791	0.771	0.035	1222
$\frac{1}{2}$ "	0.529	0.512	0.883	0.867	0.040	1224
$\frac{9}{16}$ "	0.594	0.576	0.980	0.960	0.040	1226
$\frac{5}{8}$ "	0.660	0.638	1.075	1.055	0.045	1228
$\frac{11}{16}$ "	0.725	0.704	1.134	1.116	0.045	1230
$\frac{3}{4}$ "	0.787	0.765	1.260	1.240	0.050	1232
$\frac{13}{16}$ " M20	0.832	0.818	1.260	1.240	0.050	1233
$\frac{7}{8}$ "	0.920	0.895	1.385	1.364	0.050	1234
1"	1.043	1.019	1.637	1.613	0.062	1236
$1\frac{1}{8}$ "	1.160	1.138	1.825	1.799	0.062	1238
$1\frac{1}{4}$ "	1.350	1.320	1.950	1.921	0.062	1240

Materials: Spring steel hardened & tempered to HRC 42-47 (HV 420-470)
Stainless Steel, Phosphor Bronze.

Finishes: Self finish, Zinc, or to buyer's requirements.