

FEATURES:

- Half pitch 1.27mm(.050") series
- Centronic type female connector For 1.27mm(.050") ribbon cable
- Panel mount receptacle assemblies bracket with latch block and without latch block
- Die-Cast body provide EMI/RFI shielded

MATERIALS:

- Housing And Cover: Plastic thermoplastic P.B.T UL94V-0 black
- Contact: Phosphor bronze gold selective plated
- Bracketshell: Die-Cast zinc nickel plated over copper

ELECTRICAL:

- Current Rating: 1 Amp
- Insulation Resistance: 500M Ω /Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35m Ω max
- Temperature Range: -55°C ~ +105°C

MD5 ID 50 F 0 L 3 Z

SERIES

Flat cable IDC termination

NUMBER OF CONTACT:

CONTACT TYPES:

F = female

CONTACT PLATING:

- 0 = selective flash gold
- 1 = selective 15u" gold
- 2 = selective 30u" gold

FIXING DEVICE :


- L : Latching + Jackscrews
- S : jackscrews only

THREADED HOLES:





3 = M2.6

WIRE HOLDER:



- 6 = 0.62mm
- 7 = 0.75mm
- 9 = 0.9mm

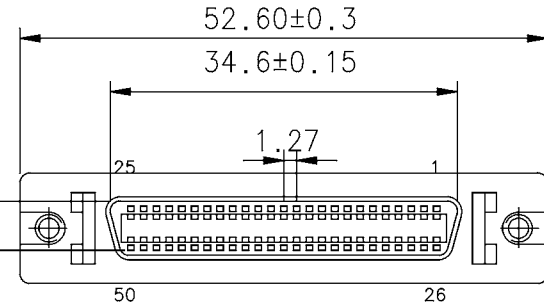

L TYPE

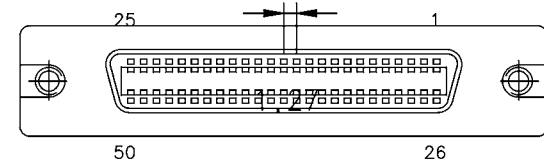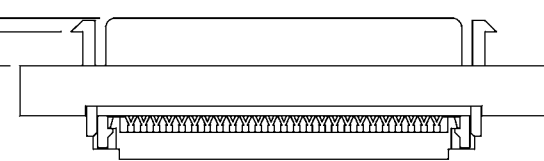

S TYPE

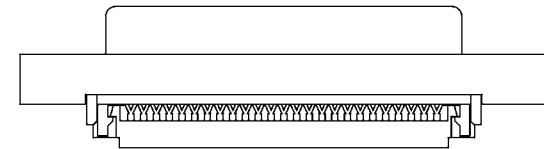

Amphenol Socapex Usine de Dole		TOL. GEN.																		
		VOLUME PIECE																		
		SURFACE PIECE																		
		PROTECTION																		
ECH.	ENS.	TRAITEMENT																		
N SERIE		MATIERE																		
DATE DU TIRAGE		DOSSIER																		
DESIGNATION		CLIENT																		
MINI D SERIES		N INTERNE																		
		CREATION PLAN																		
		MODIFICATIONS																		
		EXEC. DATE																		
		ATO																		
		30/05 2005																		
		ATO																		
		Approb																		
		IND.																		