


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS			DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
821	С	Capacitance added	J.W.M.	9/23/99	J.C.	11/16/99	JC	11/16/99
1839	D	Dimension line moved	JWM	4/25/05	НО	4/26/05	НО	4/26/05

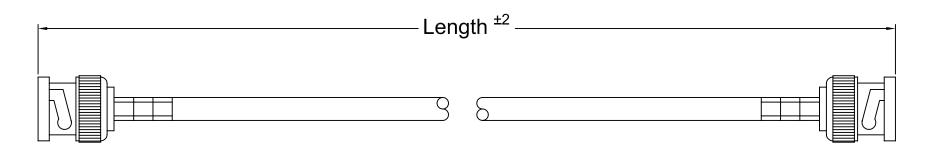

## PINOUT CONFIGURATION

MALE	MALE
BNC	BNC
CENTER —— COA	X ——CENTER
SHELL —— BRA	ID —— SHELL

Type SPC	Length
No.	(Inches)
1774	12
3331	24
1776	36
1777	48
1778	60
1779	72
1780	120

	ITEM	DESCRIPTION	QTY.	UNIT
	1	CRIMP TYPE BNC MALE CONNECTOR (50 $\Omega$ )	2	PCS.
Ī	2	RG-58C/U COAXIAL CABLE BLACK PVC JACKET	Per	Table

Nominal Capacitance = 30.8 pF/ft

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE
SPECIFIED, DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

DRAWN BY:	DATE:
JEFF MCVICKER	7/16/97
CHECKED BY:	DATE:
JOHN COLE	7/17/97
APPROVED BY:	DATE:
BRETT BRAATZ	7/29/97

DRAWIN	G TITL	E:	DNIO		04515	
			RNC	MALE	CABLE	
SIZE	DWG.	NO.				

**ASSEMBLIES** ELECTRONIC FILE REV TA-86 TA-86.DWG D SCALE: NTS U.O.M.: INCHES SHEET: 1 OF 1