


Light Duty P.V.C. Insulated P.V.C. Sheathed Flexible Cords

300/300V Ordinary Duty and Heat Resisting and Reduced Emission (<15%HCl)

Reference: 2192Y	Twin Flat	HO3VVH2-F
218_Y	Multi Core Round	HO3VVH2-F
209_Y	Multi Core Round	HO3V2V2-F

Manufactured to: IS201 BS6500 HD21

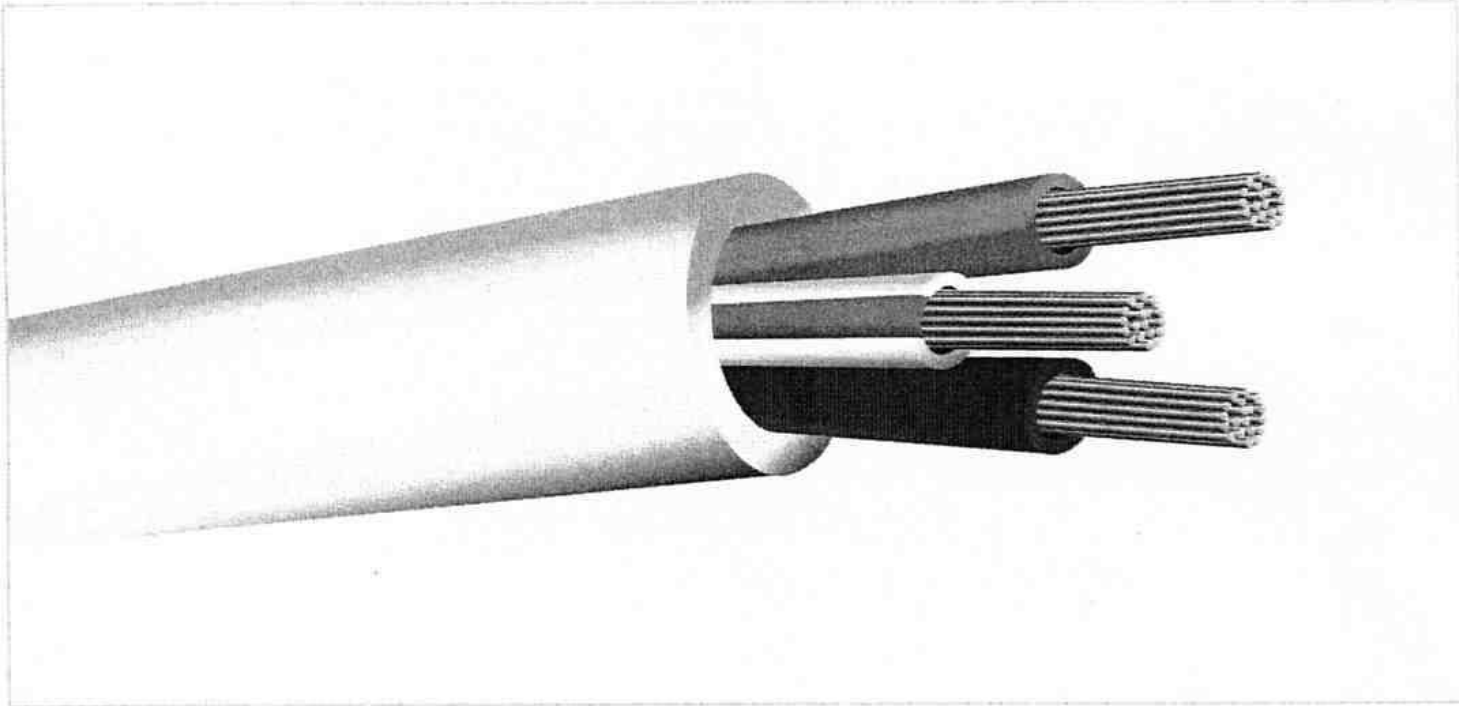

Conductor mm ²	Conductor Construction	Mean Overall Diameter (mm)					Conductor resistance ohms/km @ 20°C
		Flat 2 core	2 core circular	3 core circular	4 core circular	5 core circular	
0.5	16 / 0.2	3.35 x 5.35	5.25	5.45	5.75	7.35	39.00
0.75	24 / 0.2	3.55 x 5.75	5.70	6.0	6.40	7.95	26.00

Colours: White, Black and Gold Sheath. Other colours available on request.
Non Standard Core Colours available.

Packaging: 50 and 100 metre lengths. Other lengths available on request.