

# triton ESD




A range of top quality screwdrivers specially for use in ESD areas. Manufactured in Germany to all relevant DIN and ISO Standards. A range you can rely on.

**HANDLES** The special dissipative material is injection moulded around extra large tangs, giving greater blade to handle security. The ergonomic tri-square design ensures fatigue free work with high torque turning. Slightly textured grip has excellent anti slip properties. It is lightweight, yet shatterproof and resistant to shock, oil, acid and extreme temperatures.

**BLADES** Manufactured from job orientated chrome vanadium or chrome molybdenum steel, hardened throughout the full blade length to 52-60 HRC. Precision machined tips for the ultimate screw fit. Matt black, anti peel finish.


C.K also offer a range of Xonic Electronic ESD Screwdrivers for low torque, fine tuning applications, see page 62.

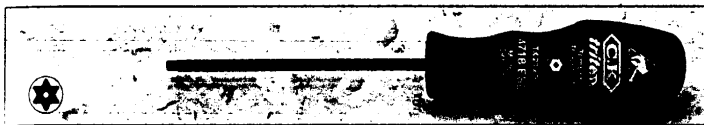

## TORX® TAMPERPROOF CHROME VANADIUM 4718ESD

DIN EN 100 015-1


ORDER REF	SIZE	Blade Length		Tip Diameter	Blade Width		Weight			
		mm	inch		mm	inch		g		
T4718ESD 08	TX 08	70	2 3/4	3.0	1/8	80	3 1/8	150	6	27
T4718ESD 09	TX 09	70	2 3/4	3.0	1/8	80	3 1/8	150	6	27
T4718ESD 10	TX 10	80	3 1/8	3.0	1/8	90	3 1/2	170	6 3/4	37
T4718ESD 15	TX 15	80	3 1/8	3.5	9/64	90	3 1/2	170	6 3/4	40
T4718ESD 20	TX 20	90	3 1/2	4.0	5/32	90	3 1/2	180	7	43

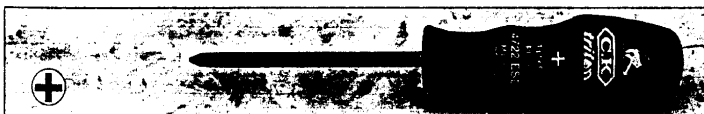

## PHILLIPS CHROME VANADIUM 4722ESD

DIN 5261, DIN 5262, DIN 5268/2, DIN EN 100 015-1

ORDER REF	SIZE	Blade Length		Tip Diameter	Blade Width		Weight			
		mm	inch		mm	inch		g		
T4722ESD 0	PH 0	60	2 3/8	3.5	9/64	70	2 3/4	130	5 1/8	22
T4722ESD 1	PH 1	80	3 1/8	5.0	3/16	90	3 1/2	170	6 3/4	48
T4722ESD 2	PH 2	100	4	6.0	7/32	100	4	200	8	72

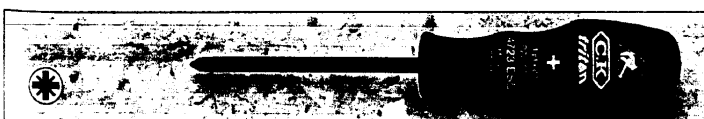

## PZD/SDV® CHROME-MOLYBDENUM 4723ESD

DIN EN 100 015-1


ORDER REF	SIZE	Blade Length		Tip Diameter	Blade Width		Weight			
		mm	inch		mm	inch		g		
T4723ESD 0	PZD/SDV 0	60	2 3/8	3.0	1/8	87	2 3/4	130	5 1/8	28
T4723ESD 1	PZD/SDV 1	80	3 1/8	5.0	3/16	90	3 1/2	170	6 3/4	48
T4723ESD 2	PZD/SDV 2	100	4	6.0	7/32	100	4	200	8	74



## INSTRUMENT SCREWDRIVER - SLOTTED CHROME VANADIUM 4725ESD

DIN 5263, DIN 5264, DIN 5268/2, ISO 2380-1, DIN EN 100 015-1

ORDER REF	Blade Length		Tip Diameter	Blade Width		Weight					
	mm	inch		mm	inch		g				
T4725ESD 03	75	3	0.5	0.02	3.0	1/8	70	2 3/4	145	5 1/4	20
T4725ESD 04	100	4	0.5	0.02	3.0	1/8	80	3 1/8	180	7	29
T4725ESD 05	125	5	0.8	0.031	5.0	3/16	90	3 1/2	215	8 1/2	55
T4725ESD 06	150	6	0.8	0.031	5.0	3/16	90	3 1/2	240	9 1/4	60
T4725ESD 08	200	8	0.8	0.031	5.0	3/16	90	3 1/2	290	11 1/2	66
T4725ESD 10	250	10	0.8	0.031	5.0	3/16	90	3 1/2	340	13 1/2	75

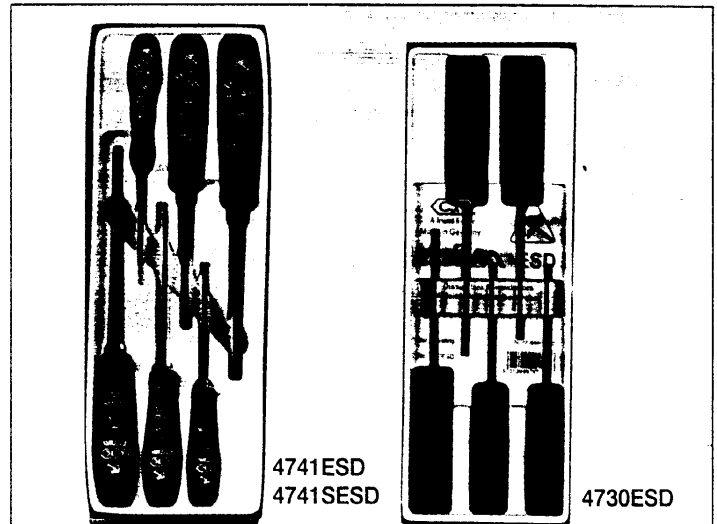

## ESD SCREWDRIVERS SET 4741ESD

Set of 6 Triton ESD Screwdrivers in a presentation box. Slotted and PZD/SDV.

WEIGHT	335g
BOX QTY	3
Contents:	1 each 4725ESD 75 x 3mm, 100 x 3mm, 125 x 5mm
	1 each 4723ESD PZD/SDV 0, 1, 2

## ESD SCREWDRIVERS 4741ESD

Set of 6 Triton ESD Screwdrivers in a presentation box. Slotted and Phillips.

WEIGHT	335g
BOX QTY	3
Contents:	1 each 4725ESD 75 x 3mm, 100 x 3mm, 125 x 5mm
	1 each 4722ESD PH 0, 1, 2

## TORX® TAMPERPROOF ESD SCREWDRIVER SET 4730ESD

Set of 5 Triton Tamperproof Torx ESD Screwdrivers in a presentation box.

WEIGHT	270g
BOX QTY	3
Contents:	1 each 4718ESD TX 08, 09, 10, 15, 20

"PZD" and "SDV" are registered trademarks of European Industrial Services Ltd. "Torx" is a registered trademark of Textron.