

# MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY  
FREDERICK, MINNESOTA

FED. MFR. CODE 91929

## SWITCH - BASIC

CATALOG LISTING

BZ-RQX167

(M) BZ-RQX167  
ISSUE 1

BZ-RQX167

M

DRAWING NUMBER

286

ISSUE 286

REPLACES

RELEASE NO.

CHECK

REVISIONS

A

C09800

R. G. C.

19 JULY 55

B

C015358

M B F

22 DEC 60

C

C015596

M B F

13 FEB 61

D

C036332

R E R

14 JAN 76

E

C077590

DLT

9 JUN 94

CHECK

G. C. H.

6 SEPT 55

CHECK


R. G. C.

19 JULY 55

CHECK

DRAWN

74-96

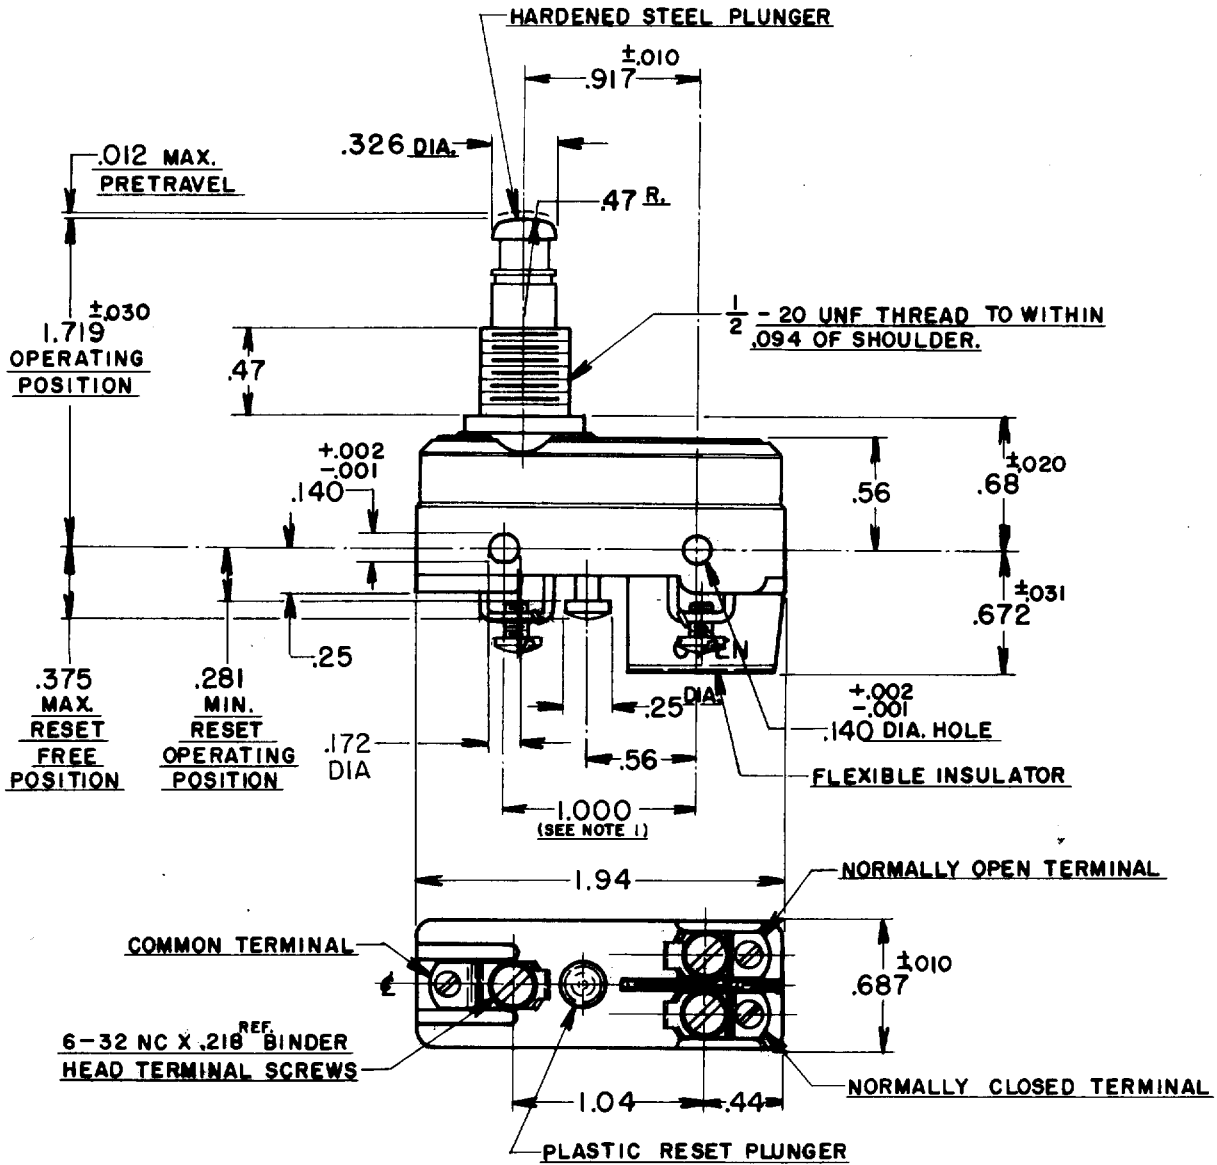

**NOTE-**  
1-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX. DIA. ON 1.000 ±.002 CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

### CHARACTERISTICS

OPERATING FORCE----- 6 - 9 1/2 OZ.  
OVERTRAVEL----- .188 MIN.

### RESET CHARACTERISTICS

OPERATING FORCE----- 2 - 10 OZ.  
OVERTRAVEL----- .015 MIN.

### ELECTRICAL DATA

CONTACT ARRANGEMENT:  
SINGLE POLE DOUBLE THROW  
MAINTAINED CONTACT

(B) UNDERWRITERS' LAB. INC. LISTED RATING  
15 A - 125, 250, OR 480 VAC  
-L 67- 1/4 HP - 125 VAC; 1/2 HP - 250 VAC  
(C) 1/2 A - 125 VDC; 1/4 A - 250 VDC



### SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
**TOLERANCES ARE:**  
ONE PLACE (.0) ±.030  
TWO PLACE (.00) ±.018  
THREE PLACE (.000) ±.008  
ANGLES ±

WEIGHT