


For Insulated Disconnect Terminals without copper sleeve please add **NTG** to the end of part number i.e. **DVPO 1-6.3F NTG**

These adaptors are to suit all 6.3mm (0.250") Series push on terminals.

MALE/FEMALE PIGGYBACK ADAPTORS




VINYL INSULATED

Part Number	Conductor Size mm ²	Colour
DVPOA 1-6.3	0.25 - 1.65	Red
DVPOA 2-6.3	1.04 - 2.63	Blue
DVPOA 5-6.3	2.63 - 6.64	Yellow

Suitable crimping tools:-

- Red - DHC 15 DHC 15Y DHCR 1
DHCR 15 DBMT 1, 3 & 4
- Blue - DHC 15 DHC 15Y DHCR 2
DHCR 15 DBMT 1, 3 & 4
- Yellow - DHC 15 DHC 15Y DHCR 5
DHCR 15 DBMT 1, 3 & 4

MALE/FEMALE PIGGYBACK ADAPTORS




NON INSULATED

Part Number	Conductor Size mm ²
DPOA 1-6.3	0.25 - 1.65
DPOA 2-6.3	1.04 - 2.63
DPOA 5-6.3	2.63 - 6.64

Suitable crimping tools:-

- DHCF 15 DHCRF 15 DBMT 1, 3 & 4


MALE/FEMALE PIGGYBACK ADAPTORS



NON CRIMP ADAPTOR

Part Number
DPOA 6.3

INTERLOCKING NYLON DISCONNECTS (NON TWIN GRIP)




FULLY INSULATED

Part Number	To Suit Width mm	Male/Female
DVFPO 1-6.3FIT	6.3	Female
DVFPO 1-6.3MIT	6.3	Male
DVFPO 2-6.3FIT	6.3	Female
DVFPO 2-6.3MIT	6.3	Male

Suitable crimping Tools:-

- DHCR 15 DHCR-HS

FEMALE NYLON FLAG DISCONNECTS




FULLY INSULATED

Part Number	Conductor Size mm ²	Colour
DNFPO 1-6.3 FLAG	0.25 - 1.65	Red
DNFPO 2-6.3 FLAG	1.04 - 2.63	Blue

Suitable crimping tool:-

- DHCR-FL

PUSH ON TERMINAL TYPE P.V.C. INSULATING COVERS

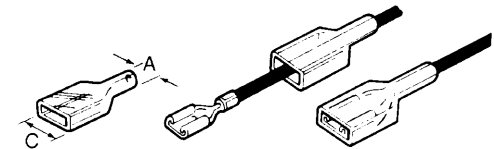


Part Number	Dimensions mm	
	A	C
DVC 2.8	2.8	4.0 x 2.4
DVC 4.8	2.4	5.2 x 2.0
DVC 6.3-1	2.8	8.0 x 2.0
DVC 6.3-2	5.6 x 2.0	8.0 x 2.0
DVC 9.5	4.8	10.3 x 4.0

For use with:

- DVC 2.8 2.8 Push On (0.110")
- DVC 6.3-1 6.3 Push On (0.250")
- DVC 6.3-2 6.3 Push On (0.250")
- DVC 9.5 9.5 Push On (0.375")

FLAG TERMINAL TYPE P.V.C. INSULATING COVERS



Part Number	Width mm
DVC 6.3 FLAG	6.3

FEMALE FLAG DISCONNECTOR



NON INSULATED

Part Number	To Suit Width mm
DPO 1-6.3FLAG	6.3