



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO.	SPC-F005	Effective:	12/21/98	Doc No:	680	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
430	A	RELEASED	JMM	12/12/00	JC	1/8/01	DJC	1/11/01

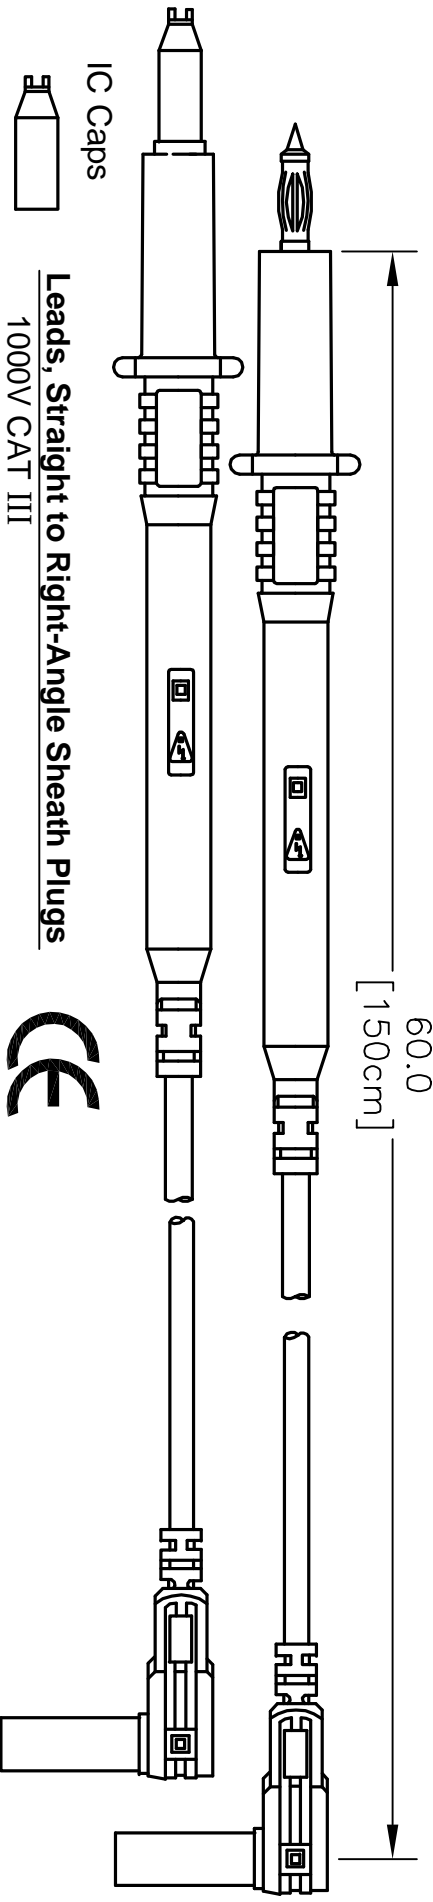

**Leads, Straight to Right-Angle Sheath Plugs**  
 1000V CAT III  
 36 Amps  
 Reinforced or Double Insulation  
 1 Red, 1 Black  
 Leads: Silicone Lead Wire

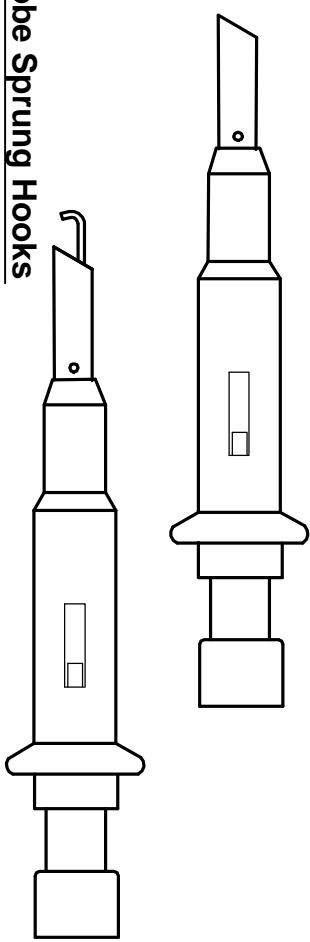

**Probe Spring Hooks**  
 500V CAT I - 5A

Packaged in clear PVC pouch

**DISCLAIMER**  
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL. WE SHALL NOT BE RESPONSIBLE FOR DAMAGES OF ANY KIND ARISING FROM THE UNEXPECTED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

**TENMA**  
 ELECTRONIC FILE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.		DRAWING TITLE: <b>Deluxe Right Angle Test Lead Kit</b>	
DRAWN BY: Jeff McVicker	DATE: 12/12/00	SIZE: <b>A</b>	DWG. NO.: <b>76-091</b>
CHECKED BY: JOHN COLE	DATE: 1/8/01	SCALE: NTS	U.O.M.: INCHES [mm]
APPROVED BY: Daniel Carey	DATE: 1/11/01		
		ELECTRONIC FILE	84N2133.dwg
			REV <b>A</b>