


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-FD05 * Effective: 12/21/98 * DCP No. 880					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
522	A	RELEASED	JWM	2/10/00	JC	5/3/00	DJC	6/5/00

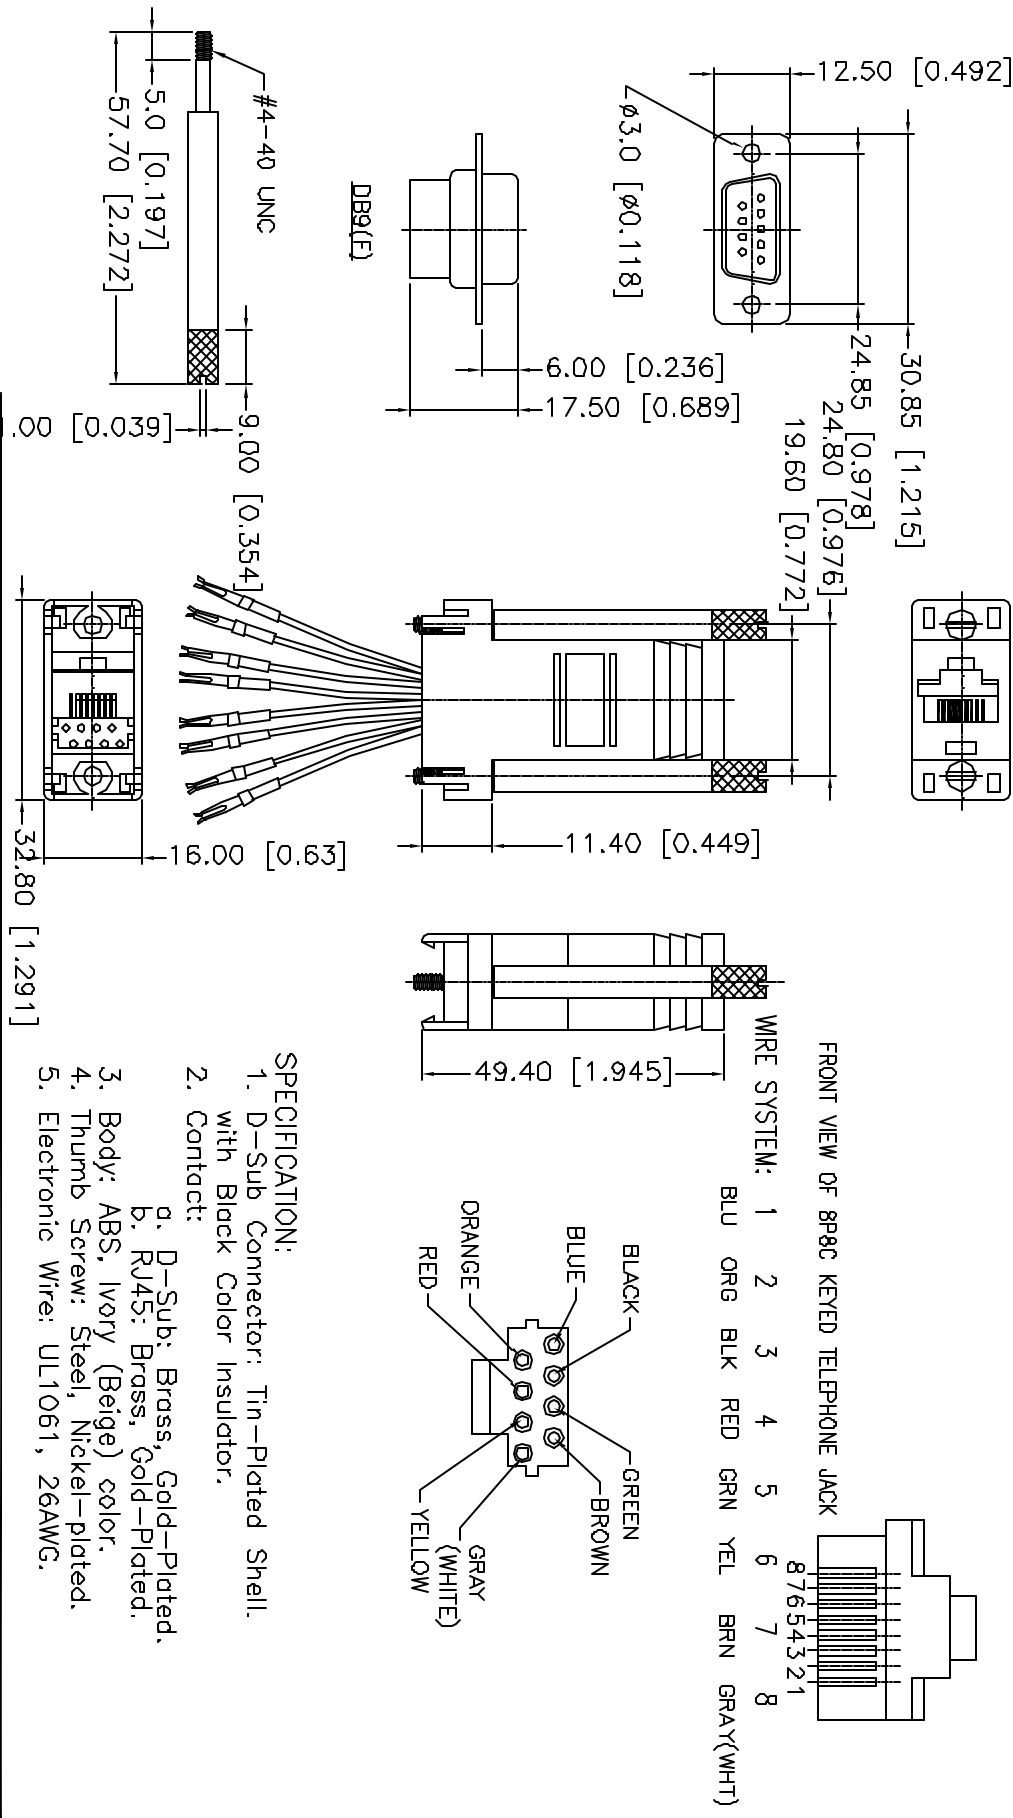

SPECIFICATION:

1. D-Sub Connector: Tin-Plated Shell, with Black Color Insulator.
2. Contact:
 - a. D-Sub: Brass, Gold-Plated.
 - b. RJ45: Brass, Gold-Plated.
3. Body: ABS, Ivory (Beige) color.
4. Thumb Screw: Steel, Nickel-plated.
5. Electronic Wire: UL1061, 26AWG.



DISCLAIMER ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.			DRAWING TITLE: DB9(F) to RJ45(8C) Adaptor		
Tolerances Unless Otherwise Specified: X=±0.2 [0.008] .XX=±0.12 [0.005]			SIZE	DWG. NO.	ELECTRONIC FILE
DRAWN BY: Jeff McVicker	DATE: 2/10/00	CHECKED BY: JOHN COLE	A	8588-0199	52N9489.dwg
APPROVED BY: Daniel Carey	DATE: 6/5/00	SCALE: NTS	U.O.M.: Millimeters [Inches]	SHEET: 1	OF 1