

## IEC 320 C14 AC Inlet



Snap-In Version

**Description**

- Panel Mount:  
Snap-In Version, from front side
- Inlet, Pin temperature 70 °C Protection class I
- Solder terminals

**Approvals**

- CSA License Number: 73690

**Characteristics**

- Designed for standard applications
- Qualified for use in equipment according IEC/EN 60950

**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


**Technical Data**

Ratings IEC	10 A / 250 VAC; 50 Hz
Ratings UL/CSA	15 A / 250 VAC; 60 Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to +70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder
Panel Thickness s	Snap-in from 0.8 mm to 2 mm universal
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	C14 acc. to IEC/EN 60320-1 UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10 A, Protection class I
-------------------------	--

**Dimensions**

Length | 31 mm

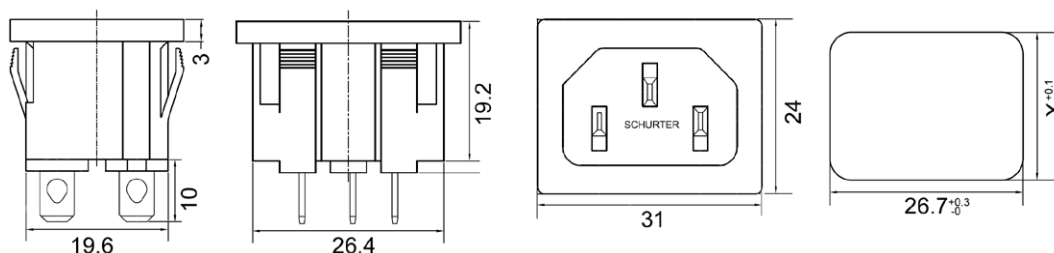

Terminals: 4.8x0.8

X=20.3: 0.8-1.2

X=20.5: 1.3-2.0

**Variants**

Terminal	Order Number
Solder	4300.0704

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

**Packaging unit** 50 Pcs