IC SOCKETS

170·715 | 716 | 717

SINGLE IN LINE

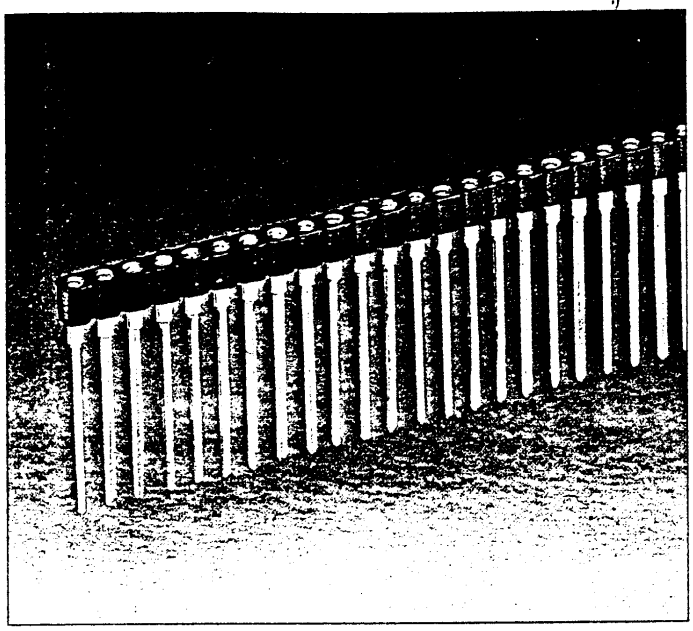

FEATURES

SNAP-OFF STRIP

- Sockets have four leaf Beryllium Copper contact for high reliability.
- Headers have precision turned brass pins.
- End and side stackable on 2.54 centres.
- Ultra-low mounting profiles.
- Socket and header can be used as a miniature connector.
- Standard lengths 20 & 32 ways, available 2·32 ways.
- Construction allows user breakoff into any smaller number of ways, by hand or using tool shown on page 67.
- For volume non-standard ways, refer to Sales Office.



MATERIAL:

Insulator: 30% glass filled polyester UL94V–0.

Contact: Beryllium copper (socket)
Life: 1,000 insertions (–01 finish)
250 insertions (–21 finish)

Socket shell and Header: Precision machined brass.

FINISH: Undercoat copper, with 2 μ Nickel

SOCKETS

Code –21 tin shell, thin gold contact (commercial standard).

Code –01 tin shell, thick gold contact (military/professional standard).

For other finishes, contact Sales Office. Other sizes can be ordered using the ORDER CODE shown.

ORDER CODE D01 – XXX XX XX

Style | No. of ways | Contact finish

D01-9971801, 18 way, solder tail socket, tin shell, thick gold contact.

HEADERS

Code 01 – tin contact

Code 05 – gold contact

SIZES NOT SHOWN IN THE TABLES CAN BE ORDERED USING THE ORDER CODE SHOWN ABOVE.

	ORDER CODES		
	20 way	32 way	DIMENSIONS
TURRET	D01-9912001 D01-9912005	D01-9913201 D01-9913205	
SLOTTED	D01-9942001 D01-9942005	D01-9943201 D01-9943205	
SOLDER CUP	D01-9932001 D01-9932005	D01-9933201 D01-9933205	

	ORDER CODES		
	20 way	32 way	DIMENSIONS
THROUGH CONNECT	D01-9922001 D01-9922005	D01-9923201 D01-9923205	
SOLDER SOCKET	D01-9972021 D01-9972001	D01-9973221 D01-9973201	
WRAP SOCKET	D01-9952001	D01-9953201	

HARWIN

SALES DESK
☎0705–370451