

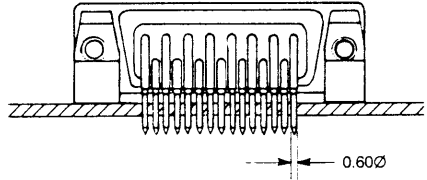


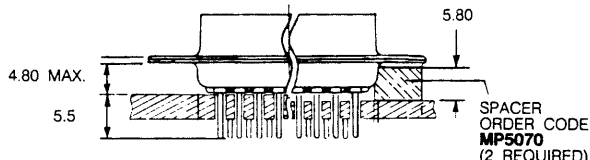

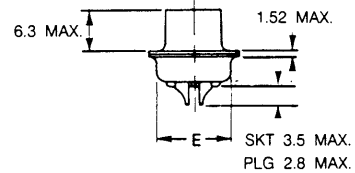


- Standard Dee – McMurdo's top performance Dee, solder bucket approved to British Telecom's specification.
- Budget Dee – McMurdo's general purpose, high performance commercial connector (order codes for Budget Dee end with B).
- Available in shell sizes 9, 15, 25, 37 and 50.
- Solder bucket, straight P.C., right-angled P.C., and wire wrap termination styles.
- Turned contacts.

TECHNICAL DATA			PERFORMANCE SPECIFICATION	
Physical	Material	Finish	Current Rating (at 70°C T. amb.)	4A – individual contact 2.5A – all contacts simultaneously
Shell	Steel	Zinc/yellow passivate or Tin over nickel	Working Voltage	500V d.c. or a.c. peak
Insulator	Polyester	Rated UL94 V0	Contact Resistance	10mΩ max.
Contacts	Copper alloy	Hard acid gold	Insulation Resistance	10 ² MΩ min.
			Environmental Classification	25/085/21



BRACKETS	
Plastic – with self tap screws	2 Row MP501-2* 3 Row MP502-2*
– with 4.40 U.N.C. insert	2 Row MP625
Metal – with 4.40 U.N.C. thread	2 Row MMB1-40
– plain bracket	2 Row MMB1

(supplied in pairs)
* can be supplied fitted – see page 7.

