

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F005 * Effective: 12/21/98 * DCP No. 860					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
154	A	RELEASED	DJC	1/5/99	JC	1/22/99	JMM	1/29/99
902	B	MADE INTO A TABULAR SPEC	HYO	3/2/00	JC	3/2/00	JC	3/2/00

SPECIFICATIONS:




RATINGS:

- 1. VOLTAGE: 125V
- 2. CURRENT: 6A
- 3. WIRE SIZE: 28-16 AWG

MATERIALS:

- 1. INSULATING MATERIAL: PA
- 2. FLAMMABILITY CLASS: UL94V-0
- 3. TEMPERATURE RANGE: -30 °C TO +105 °C
- 4. TERMINAL BLOCK: CUZn
- 5. WIRE GUARD: CuSn
- 6. COLOR: Dark grey

SPC TYPE NO.	NO. OF POLES
1898	2
1899	3
1900	4
1901	5
1902	6
1903	7

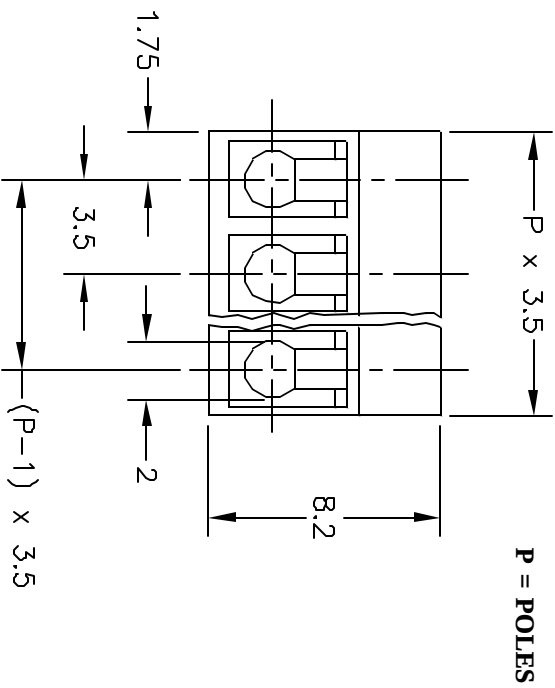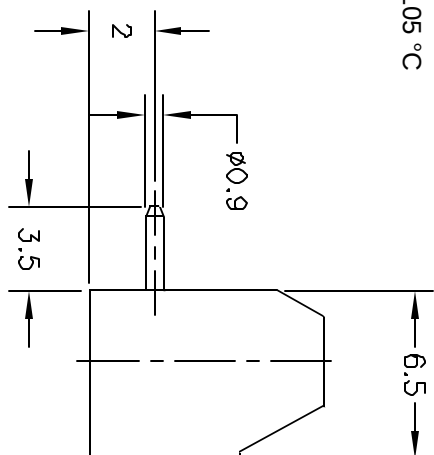

DISCLAIMER
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
DANIEL CAREY	1/5/99
CHECKED BY:	DATE:
JOHN COLE	1/22/99
APPROVED BY:	DATE:
JEFF MCVICKER	1/29/99

DRAWING TITLE:
HORIZONTAL, 6A, 3.50mm SPACING, WIRE GUARD

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-215	TA-215.DWG	B
SCALE:	NTS	U.O.M.: MILLIMETERS	SHEET: 1 OF 1