
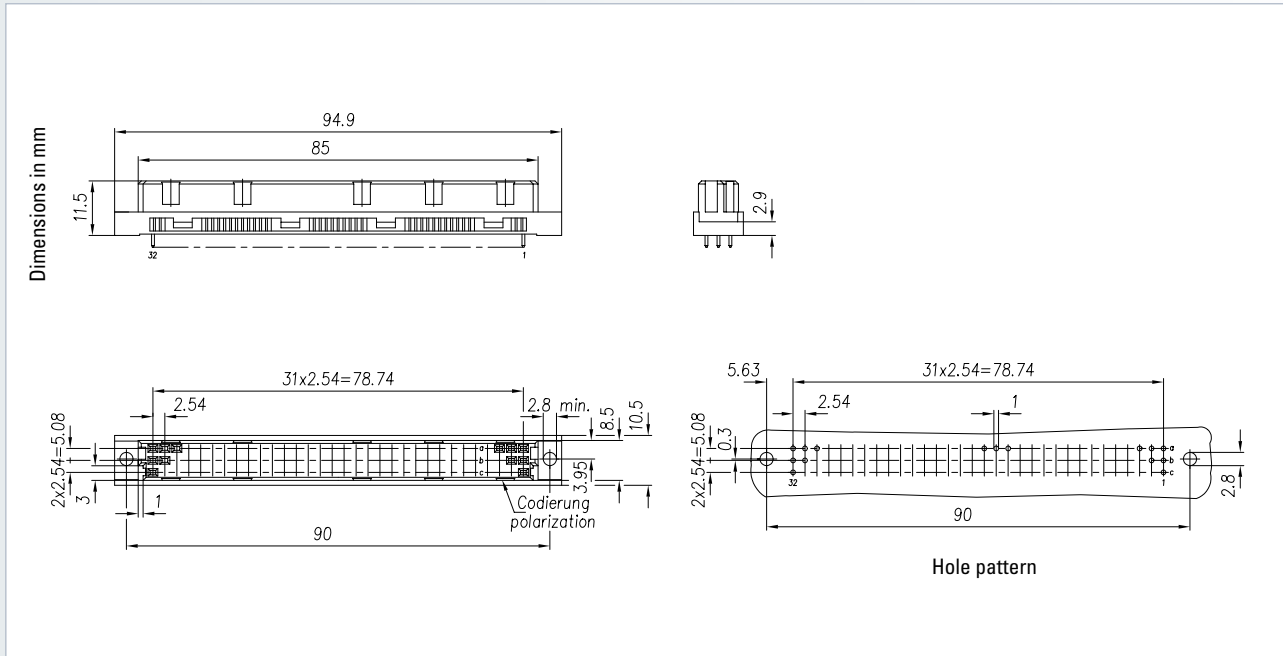








Type C

Female connector



No. of contacts	Contact arrangement	Press-fit technology – Performance level II		
		Termination length		
				
Part number				
32		104-60014-xx	104-65015-xx	104-65016-xx
48		104-60044-xx	104-65045-xx	104-65046-xx
64		304-60054-02	304-65055-03	304-65056-04
96		304-60064-02	304-65065-03	304-65066-04










Note
 – * Rear mating zone Ni, Au

Options
 – Without flange
 – Contact arrangement (see page 162)

Cross reference
 – Type C with switching function (see page 155)
 – VME_x (see page 152)
 – Type C with IDC (see page 157)

<p>Accessories</p> <ul style="list-style-type: none"> – Press-fit tool (see page 208) – Support tool (see page 209) – Coding accessories (see page 160) – Shroud (see page 158) 	<p>On request</p> <ul style="list-style-type: none"> – Performance levels I + III or customer-specific – Special contact length – Alternative surface Sn, e.g. for WireWrap 	<p>Ordering note</p> <p>Only for 104</p> <ul style="list-style-type: none"> – PCB 1.5 to 2.0 mm = xxx-xxxx-01 termination length = 3.2 mm – PCB 2.0 to 2.8 mm = xxx-xxxx-02 termination length = 4.6 mm – PCB > 2.8 mm = xxx-xxxx-03 termination length = 4.6 mm
--	---	---



No. of contacts	Contact arrangement	Solder technology – Performance level II				
		Termination length				
						Manual soldering with solder lug 
Part number						
32		104-40014	–	–	104-40016	–
48		104-40044	–	–	104-40046	–
64		304-40054-05	304-40054-01	304-40054-02	304-40055-03	104-40115
96		304-40064-05	304-40064-01	304-40064-02	304-40065-03	104-40075

Accessories

- Coding accessories (see page 160)

On request

- Performance levels I + III or customer-specific
- Special contact length
- Also in THTR

Options

- Board lock (see page 159)
- Contact arrangement (see page 162)

Cross reference

- Type C with switching function (see page 155)
- VMEx (see page 152)
- Type C with IDC (see page 157)