

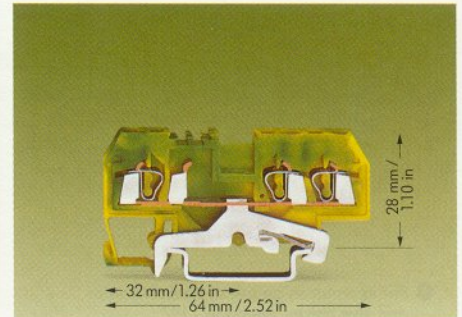


<p>0.08 – 1.5 mm<sup>2</sup>   AWG 28 – 16</p> <p>Terminal block width 4 mm / 0.157 in</p> <p>8 – 9 mm / 0.33 in</p> <p>* </p>	<p>0.08 – 2.5 mm<sup>2</sup>   AWG 28 – 12</p> <p>Terminal block width 5 mm / 0.197 in</p> <p>8 – 9 mm / 0.33 in</p> <p>* </p>	<p>0.08 – 2.5 mm<sup>2</sup>   AWG 28 – 12</p> <p>Terminal block width 5 mm / 0.197 in</p> <p>8 – 9 mm / 0.33 in</p> <p>* </p>
--	--	--

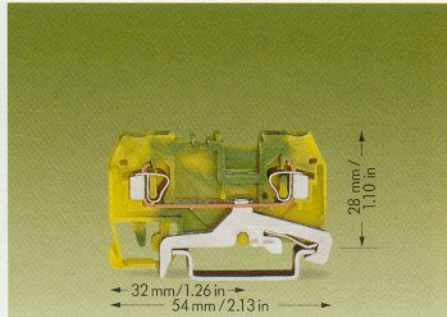

Item-No.	Pack.-unit pcs	Item-No.	Pack.-unit pcs	Item-No.	Pack.-unit pcs
<b>4-conductor ground (earth) terminal block</b>		<b>2-conductor ground (earth) terminal block</b>		<b>3-conductor ground (earth) terminal block</b>	
green-yellow <b>279-837</b>	100	green-yellow <b>280-907</b>	100	green-yellow <b>280-687</b>	100
<b>4-conductor shield (screen) terminal block</b>					
white <b>279-838</b>	100				
Appropriate marking system <b>WSB/WFB</b>		Appropriate marking system <b>WMB/WSB/WFB</b>		Appropriate marking system <b>WMB/WSB/WFB</b>	
2 mm / 0.079 in thick		2.5 mm / 0.098 in thick		2.5 mm / 0.098 in thick	
orange <b>279-346</b>	100 (4 x 25)	orange <b>280-309</b>	100 (4 x 25)	orange <b>280-326</b>	100 (4 x 25)
grey <b>279-344</b>	100 (4 x 25)	grey <b>280-308</b>	100 (4 x 25)	grey <b>280-324</b>	100 (4 x 25)
2 mm / 0.079 in thick		2 mm / 0.079 in thick		2 mm / 0.079 in thick	
orange <b>279-347</b>	100 (4 x 25)	orange <b>280-311</b>	100 (4 x 25)	orange <b>280-346</b>	100 (4 x 25)
grey <b>279-345</b>	100 (4 x 25)	grey <b>280-310</b>	100 (4 x 25)	grey <b>280-344</b>	100 (4 x 25)
6 mm / 0.236 in wide <b>249-116</b>	100 (4 x 25)	6 mm / 0.236 in wide <b>249-116</b>	100 (4 x 25)	6 mm / 0.236 in wide <b>249-116</b>	100 (4 x 25)
10 mm / 0.394 in wide <b>249-117</b>	50 (2 x 25)	10 mm / 0.394 in wide <b>249-117</b>	50 (2 x 25)	10 mm / 0.394 in wide <b>249-117</b>	50 (2 x 25)
0.08 – 0.2 mm <sup>2</sup> ① <b>279-470</b>	200 strips	0.08 – 0.2 mm <sup>2</sup> ① <b>280-470</b>	200 strips	0.08 – 0.2 mm <sup>2</sup> ① <b>280-470</b>	200 strips
0.25 mm <sup>2</sup> <b>279-471</b>	200 strips	0.25 – 0.5 mm <sup>2</sup> <b>280-471</b>	200 strips	0.25 – 0.5 mm <sup>2</sup> <b>280-471</b>	200 strips
0.75 – 1 mm <sup>2</sup> <b>279-472</b>	200 strips	0.75 – 1 mm <sup>2</sup> <b>280-472</b>	200 strips	0.75 – 1 mm <sup>2</sup> <b>280-472</b>	200 strips
I <sub>N</sub> 15 A		I <sub>N</sub> 24 A		I <sub>N</sub> 24 A	
grey <b>279-402</b>	200 (8 x 25)	grey <b>280-402</b>	200 (8 x 25)	grey <b>280-402</b>	200 (8 x 25)
yellow-green <b>279-422</b>	200 (8 x 25)	yellow-green <b>280-422</b>	200 (8 x 25)	yellow-green <b>280-422</b>	200 (8 x 25)
2-way <b>279-482</b>	200 (8 x 25)	2-way <b>280-482</b>	200 (8 x 25)	2-way <b>280-482</b>	200 (8 x 25)
3-way <b>279-483</b>	200 (8 x 25)	3-way <b>280-483</b>	200 (8 x 25)	3-way <b>280-483</b>	200 (8 x 25)
2-way <b>279-432</b>	1	2-way <b>280-432</b>	1	2-way <b>280-432</b>	1
3-way <b>279-433</b>	1	3-way <b>280-433</b>	1	3-way <b>280-433</b>	1

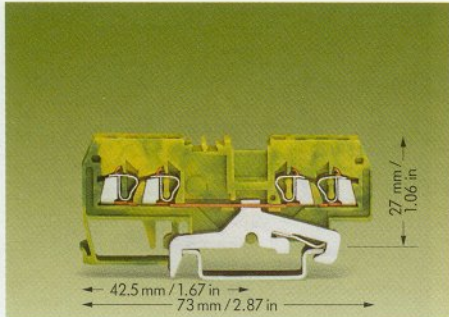

Removal from the carrier rail

If it is required to use standard carrier rails as ground (earth) conductor busbars please refer to the **maximum current capacities** listed below.

Carrier rail	Item-No.	Current ② [A]	acc. to mm <sup>2</sup> /AWG Cu
TS 35 x 7.5 (steel) slotted	210-112	76	16
TS 35 x 7.5 (steel) unslotted	210-113	76	16
TS 35 x 15 (steel) 1.5 mm / 0.059 in thick	210-114	125	35
TS 35 x 15 (steel) 2.3 mm / 0.091 in thick	210-118	125	35
TS 35 x 7.5 (Alu) unslotted	210-196	76	16
TS 35 x 15 (Cu) 2.3 mm / 0.091 in thick	210-198	309	150

② applies to rails of 1m / 3'3" length